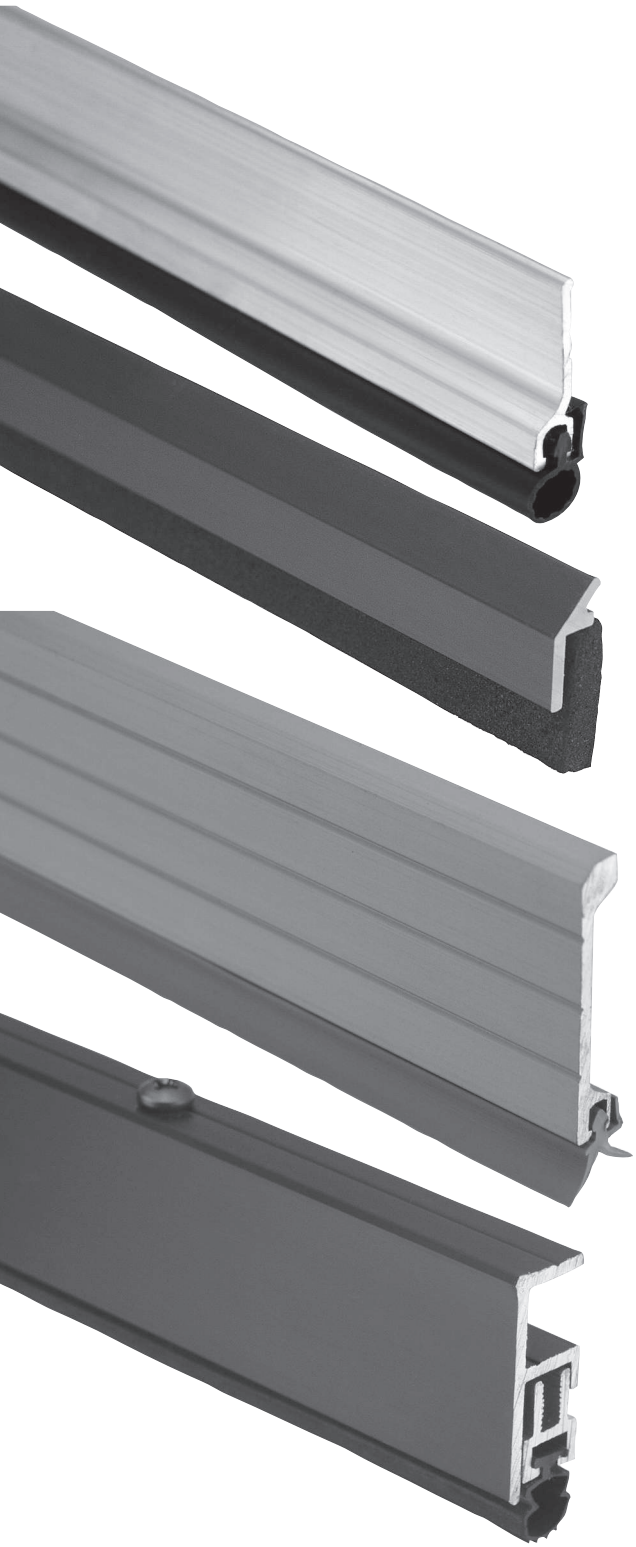

CONTENTS:

Standard Perimeter Gasketing 172
Perimeter Gasket Solutions for Sliding Doors 175
Stainless Steel Perimeter Gasketing 176
Adjustable Jamb Gasketing 177
Heavy Duty Interlock Perimeter Gasketing 177
Heavy Duty Perimeter Gasketing - Head Section 178
Heavy Duty Perimeter Gasketing - Standard Jamb 179
Perimeter Gasket Jamb Brackets 179
Snap Cover Perimeter Gasketing With Concealed Fasteners 180
Kerf-In Weatherstrip 181
Magnetic Weatherstrip 182
Adhesive Perimeter Gasketing 182
MicroShield® Antimicrobial Adhesive Gasketing 183
Excessive Gap Perimeter Solutions 184
Interlock Weatherstrip For Wood Windows 184
Interlock Weatherstrip For Wood Doors 185
Cushion/Spring Weatherstrip 185
Fasteners for Cushion, Spring and Interlock Weatherstrip 185
Privacy Seals for Sliding Doors 186

INDEX:

PRODUCT	PAGE
2P	184
4C	184
4P	184
10	184
41M	185
43	185
70C-100	185
70E-99	185
73	185
74	185
75	185
285	174
290	179
294	175
296	174
297	172
303	172
305	173
305SS	176
306	175
309	175
312	174
315	174
315SS	176
316	172
319	173
319SS	176
322	177
330	174
332	173
335	177
336	177
350	177
375	173
379	177
394	175
394	186
950	175
950	186
2815_M	182
2891	178
2892	178
2893	178
2902	179
2903	179
3151	174
29310	180
29313	180
29326	180
29344	180
29346	180
29394	175
29394	186
AM88	183
BKT050	179
BKT075	179
EZGAP™ XG10	184
HSS20XGxS773	184
MAG349	182
NL1678	185
NL1734CPXE	185
NL13516	185
P50	182
P51B17	185
PEMKOSFSET	186
PK33	183
PK52	182
PK55	183
PY900	175
Q102	181
Q103	181
Q106	181
Q107	181
Q108	181
S44	182
S52	181
S77	183
S88	182
S104	181
S105	181
S109	181
S442	183
S771x6	183
S773	182
S776	183
XG90KIT	184
XG900	184
XGSHIM	184

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY

Experience a safer
and more open world

STANDARD PERIMETER GASKETING

- Rigid jamb weatherstrip shown mounted on openings with 1/16" gaps; however, each weatherstrip can seal gaps up to the depth of its seal. Seal depth provided on each illustration (example: the 303 has a 1/4" seal; therefore, it can seal up to a 1/4" gap)
- Punched on 6" centers with slotted holes for adjustment. Models 294, 303, and 306 are available with self-adhesive two-sided tape (TST) and tek screws (3 slotted holes per part) for easy installation. To obtain this option, add "TST" to the end of the part when ordering (example: 303AVTST)

303_S

AVAILABLE FINISHES:
10BE, 4E, A, BSP, C, D, G, SN, WSP
REPLACEMENT INSERT: **S3 (BL, W)**
ANSI: **R3E164, R3E165**



303_PK

AVAILABLE FINISHES:
10BE, 4E, A, BSP, C, D, G, PW, SN, WSP
REPLACEMENT INSERT: **PK47 (BL, GR)**
ANSI: **R3G164**



303_V

AVAILABLE FINISHES:
10BE, 4E, A, BSP, C, D, G, PW, SN, WSP
REPLACEMENT INSERT: **EV47 (BL, GR, W)**



316_S

AVAILABLE FINISHES:
10BE, 4E, A, BSP, D, G, WSP
REPLACEMENT INSERT: **S3 (BL, W)**
ANSI: **R3E164, R3E165**



316_PK

AVAILABLE FINISHES:
10BE, 4E, A, BSP, D, G, WSP
REPLACEMENT INSERT: **PK47 (BL, GR)**
ANSI: **R3G164, R3G165**



316_V

AVAILABLE FINISHES:
10BE, 4E, A, BSP, D, G, WSP
REPLACEMENT INSERT: **EV47 (BL, GR, W)**



297_S

AVAILABLE FINISHES:
10BE, 4E, A, BSP, D, PW, SN, WSP
REPLACEMENT INSERT: **S3 (BL, W)**
ANSI: **R3E164, R3E165**



297_PK

AVAILABLE FINISHES:
10BE, 4E, A, BSP, D, PW, SN, WSP
REPLACEMENT INSERT: **PK47 (BL, GR)**
ANSI: **R3G164, R3G165**



297_V

AVAILABLE FINISHES:
10BE, 4E, A, BSP, D, PW, SN, WSP
REPLACEMENT INSERT: **EV47 (BL, GR, W)**



NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
10BE (Satin Bronze Powder Coat) **4E** (Translucent Brass Powder Coat) **A** (Mill Finish Aluminum)
BSP (Black Suede Powder Coat) **C** (Clear Anodized) **D** (Dark Bronze Anodized **G** (Gold Anodized)
PW (Painted White) **SN** (Satin Nickel Anodized) **WSP** (White Suede Powder Coat)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

STANDARD PERIMETER GASKETING *(Cont.)*

305_N

AVAILABLE FINISHES:
10BE, B, BSP, C, D, WSP
REPLACEMENT INSERT: **E2 (BL)**
ANSI (alum): **R3G164, R3G165**
ANSI (brass): **R1G164, R1G165**



305_R

AVAILABLE FINISHES:
10BE, B, BSP, C, D, G, WSP
REPLACEMENT INSERT: **ER1 (BL)**
ANSI (alum): **R3G164, R3G165**
ANSI (brass): **R1G164, R1G165**



305_S

AVAILABLE FINISHES:
10BE, B, BSP, C, D, G, WSP
REPLACEMENT INSERT: **SR1 (BL)**
ANSI: **R3E164, R3E165**



319_N

AVAILABLE FINISHES: **10BE, BSP, C, D, G, WSP**
REPLACEMENT INSERT: **E11 (BL)**
ANSI: **R3G164, R3G165**



319_R

AVAILABLE FINISHES: **10BE, BSP, C, D, G, WSP**
REPLACEMENT INSERT: **ER1 (BL)**
ANSI: **R3G164, R3G165**



319_S

AVAILABLE FINISHES: **10BE, BSP, C, D, G, WSP**
REPLACEMENT INSERT: **SR1 (BL)**
ANSI: **R3E165**



375_R

AVAILABLE FINISHES:
10BE, BSP, C, D, G, WSP
REPLACEMENT INSERT: **ER6 (BL)**
ANSI (alum): **R3C164, R3C165**

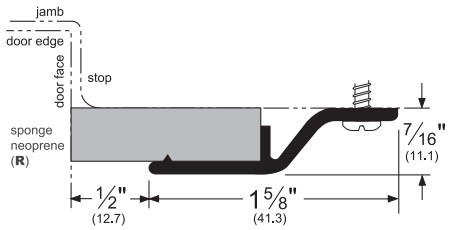

332_R

AVAILABLE FINISHES:
10BE, BSP, C, D, WSP
REPLACEMENT INSERT: **ER1 (BL)**
ANSI: **R3G164, R3G165**



332_S

AVAILABLE FINISHES:
10BE, BSP, C, D, WSP
REPLACEMENT INSERT: **SR1 (BL)**
ANSI: **R3E164, R3E165**



NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
10BE (Satin Bronze Powder Coat) **A** (Mill Finish Aluminum) **B** (Mill Finish Extruded Bronze [Brass])
BSP (Black Suede Powder Coat) **C** (Clear Anodized) **D** (Dark Bronze Anodized
G (Gold Anodized) **WSP** (White Suede Powder Coat)

800-824-3018 | www.pemko.com
Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY
Experience a safer and more open world

STANDARD PERIMETER GASKETING *(Cont.)*

312_R
AVAILABLE FINISHES:
10BE, BSP, C, D, G, WSP
REPLACEMENT INSERT: **ER9BL (BL)**
ANSI (alum): **R3G164, R3G165**



315_R
AVAILABLE FINISHES:
10BE, B, BSP, C, D, WSP
REPLACEMENT INSERT: **ER9BL (BL)**
ANSI (alum): **R3G164, R3G165**
- Please consult website for correct 315BR profile.

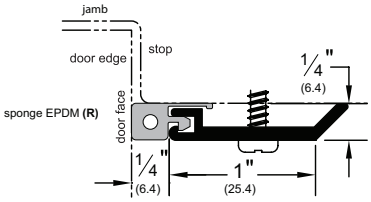

3151_R
AVAILABLE FINISHES:
10BE, BSP, C, D, G, WSP
REPLACEMENT INSERT: **ER2 (BL)**
ANSI (alum): **R3G164**

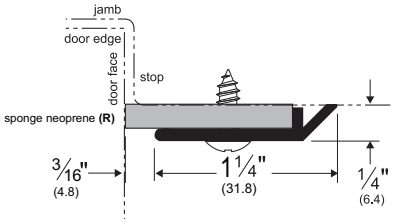

296_S
AVAILABLE FINISHES:
10BE, BSP, C, D, WSP
REPLACEMENT INSERT: **SR6 (BL)**
ANSI (alum): **R3E164, R3E165**



296_PK
AVAILABLE FINISHES:
10BE, BSP, C, D, WSP
REPLACEMENT INSERT: **PK4132 (BL)**
ANSI (alum): **R3G164, R3G165**



296_R
AVAILABLE FINISHES:
10BE, BSP, C, D, WSP
REPLACEMENT INSERT: **E7 (BL)**
ANSI (alum): **R3G164, R3G165**



330_V
AVAILABLE FINISHES:
10BE, 4E, A, BSP, D, SN, WSP
REPLACEMENT INSERT: **EV61 (BL, GR)**



285_PK
AVAILABLE FINISHES:
10BE, BSP, C, D, G, WSP
REPLACEMENT INSERT: **PK4304 (BL)**
ANSI (alum): **R3G164, R3G165**



285_R
AVAILABLE FINISHES:
10BE, BSP, C, D, G, WSP
REPLACEMENT INSERT: **E4303 (BL)**
ANSI (alum): **R3G166**

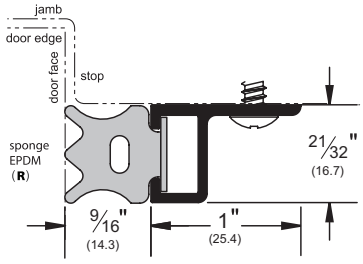

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
10BE (Satin Bronze Powder Coated Aluminum) **4E** (Translucent Brass Powder Coat) **A** (Mill Finish Aluminum)
B (Mill Finish Extruded Bronze [Brass]) **BSP** (Black Suede Powder Coated Aluminum) **C** (Clear Anodized)
D (Dark Bronze Anodized) **G** (Gold Anodized) **SN** (Satin Nickel Anodized) **WSP** (White Suede Powder Coated Aluminum)

PEMKO
ASSA ABLOY
Experience a safer and more open world

800-824-3018 | www.pemko.com
Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

STANDARD PERIMETER GASKETING *(Cont.)*

306_Q

AVAILABLE FINISHES: **10BE, 4E, A, BSP, D, WSP**
REPLACEMENT INSERT: **Q103 (D, W, BL)**

- Minimum space between the door face and the stop is 3/16"; maximum space is 5/16"
- Note insert color when ordering: Dark Brown (D) or White (W)



306_V

AVAILABLE FINISHES:
10BE, 4E, A, BSP, D, WSP
REPLACEMENT INSERT: **EV59 (BL, GR)**



309_P

AVAILABLE FINISHES: **10BE, E, A, BSP, D, WSP**
REPLACEMENT INSERT: **P3 (BL, GR)**

- Minimum space between the door face and the stop is 3/16"; maximum space is 5/16"
- May also be used as a door bottom sweep



294_V

AVAILABLE FINISHES:
10BE, 4E, A, BSP, D, PW, SN, WSP
REPLACEMENT INSERT: **EV60 (GR)**



PERIMETER GASKET SOLUTIONS FOR SLIDING DOORS

• For Seal Set information, please see sets outlined on page 202

29394_PK

AVAILABLE FINISHES: **10BE, BSP, C, D, WSP**
REPLACEMENT INSERT: **PK47 (GR, BL)**

- Perimeter sealing, used with 394 wall-mounted ramp



394_

AVAILABLE FINISHES:
10BE, BSP, C, D, WSP

- Wall-mounted ramp used with 29394_PK

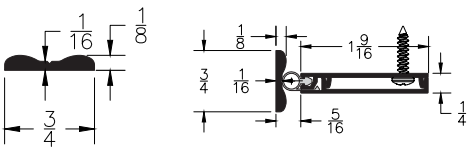

950_

AVAILABLE FINISHES:
10BE, BSP, C, D, WSP
REPLACEMENT INSERT: **PY900 (BL)**

- Head mounted sealing system



NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
10BE (Satin Bronze Powder Coated Aluminum) **4E** (Translucent Brass Powder Coat) **A** (Mill Finish Aluminum)
BSP (Black Suede Powder Coated Aluminum) **C** (Clear Anodized) **D** (Dark Bronze Anodized)
PW (Painted White) **SN** (Satin Nickel Anodized) **WSP** (White Suede Powder Coated Aluminum)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY
Experience a safer and more open world

STAINLESS STEEL PERIMETER GASKETING

- Stainless Steel is a tough and durable material that tolerates exposure to chemicals and heavy use
- Manufactured from 430 Stainless Steel
- Easy to clean to meet sanitary requirements
- Long lasting with low cost of ownership

305SSE

AVAILABLE FINISH: **SS (#4 Finish)**
REPLACEMENT INSERT: **E2 (BL)**
ANSI: **R5G164, R5G165**



305SSR

AVAILABLE FINISH: **SS (#4 Finish)**
REPLACEMENT INSERT: **ER1 (BL)**
ANSI: **R5G164, R5G165**



305SSS

AVAILABLE FINISH: **SS (#4 Finish)**
REPLACEMENT INSERT: **SR1 (BL)**
ANSI: **R5E164, R5E165**



315SSR

AVAILABLE FINISH: **SS (#4 Finish)**
REPLACEMENT INSERT: **ER2 (BL)**
ANSI: **R5G164, R5G165**

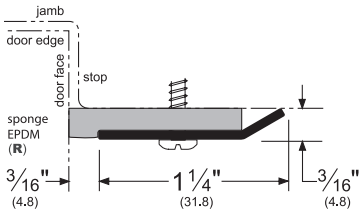

319SSN

AVAILABLE FINISH: **SS (#4 Finish)**
REPLACEMENT INSERT: **E11 (BL)**
ANSI: **R5G164, R5G165**



NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
SS (#4 Brushed Finish)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

ADJUSTABLE JAMB GASKETING

- Adjustable jamb gasketing is shown mounted on openings with 1/16" gaps; however, each weatherstrip can seal gaps up to 1/4"
- Adjustable jamb weatherstrip can adjust 3/16" out from the position illustrated

379_S

AVAILABLE FINISHES: **10BE, BSP, C, D, G, WSP**
REPLACEMENT INSERT: **SR6 (BL)**
ANSI: **R3E264, R3E265**

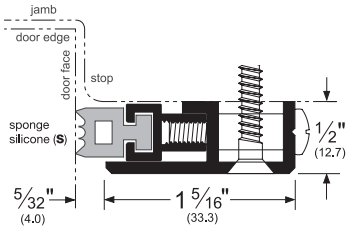

379_PK

AVAILABLE FINISHES: **10BE, BSP, C, D, G, WSP**
REPLACEMENT INSERT: **PK4132 (BL)**
ANSI: **R3G264, R3G265**

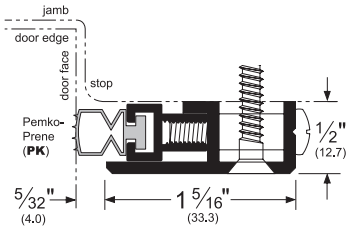

379_R

AVAILABLE FINISHES: **10BE, BSP, C, D, G, WSP**
REPLACEMENT INSERT: **E7 (BL)**
ANSI: **R3G264, R3G265**



322_SPK

AVAILABLE FINISHES: **10BE, BSP, C, D, WSP**
REPLACEMENT INSERT: **PK121 (BL)**

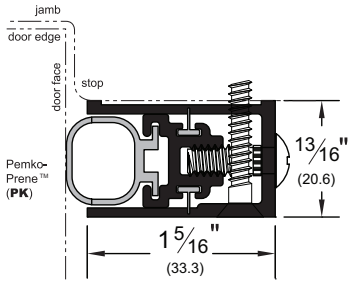

350_SPK

AVAILABLE FINISHES: **10BE, BSP, C, D, WSP**
REPLACEMENT INSERT: **PK4304 (BL)**
ANSI: **R3G164, R3G165**



350_SR

AVAILABLE FINISHES: **10BE, BSP, C, D, WSP**
REPLACEMENT INSERT: **E4303 (BL)**
ANSI: **R3G164, R3G165**

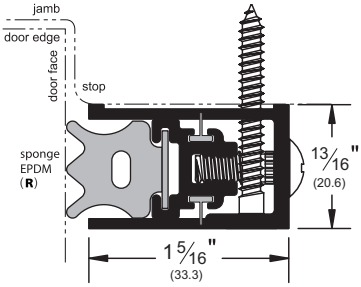

HEAVY DUTY INTERLOCK PERIMETER GASKETING

335_R

AVAILABLE FINISHES: **A**

NOTE: Diagram consists of two parts, each sold separately.

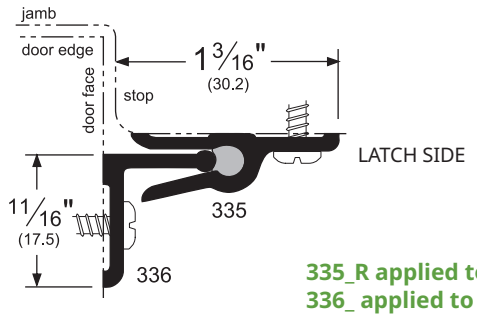

335_R applied to jamb;
336_ applied to door.

336_

AVAILABLE FINISHES: **A**

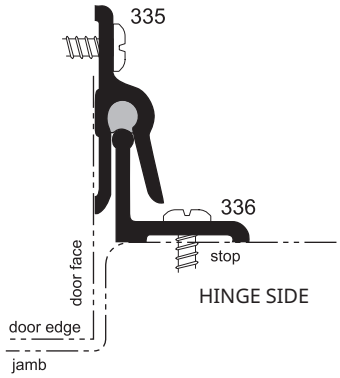

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE

10BE (Satin Bronze Powder Coated Aluminum) **A** (Mill Finish Aluminum) **BSP** (Black Suede Powder Coated Aluminum)
C (Clear Anodized) **D** (Dark Bronze Anodized **G** (Gold Anodized) **WSP** (White Suede Powder Coated Aluminum)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY
Experience a safer and more open world

HEAVY DUTY PERIMETER GASKETING - HEAD SECTION

- For the head section of the frame where a parallel arm closer bracket or other hardware is required. Supplied undrilled (36") or drilled (80" and above) and supplied with sheet metal screws for mounting
- If used as a stop, flat head machine screws can be provided upon request and take a countersunk #10 hole. Pemko will drill the head member only if drilling instructions for countersink holes are provided
- All gasketing shown below is sold individually

2891_PK

AVAILABLE FINISHES: **10BE, 4E, A, BSP, D, G, WSP**
REPLACEMENT INSERT: **PK47 (BL, GR)**
ANSI: **R3G164, R3G165**



2891_S

AVAILABLE FINISHES: **10BE, 4E, A, BSP, D, G, WSP**
REPLACEMENT INSERT: **S3 (BL, W)**
ANSI: **R3E164, R3E165**



2891_PK

1 per door standard

290_PK

2 per door standard



When ordering a head section such as 2891_PK, two corresponding side sections (i.e. 290_PK) should also be ordered for the latch and hinge sides of the frame.

2891_V

AVAILABLE FINISHES: **10BE, 4E, A, BSP, D, WSP**
REPLACEMENT INSERT: **EV47 (BL, GR, W)**



2892_V

AVAILABLE FINISHES: **10BE, 4E, A, BSP, D, WSP**
REPLACEMENT INSERT: **EV59 (BL, GR, W)**



2893_V

AVAILABLE FINISHES: **10BE, 4E, A, BSP, D, WSP**
REPLACEMENT INSERT: **EV60 (GR)**



NOTE: Products shown in this section may not be drawn to scale.
AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
10BE (Satin Bronze Powder Coated Aluminum) **4E** (Translucent Brass Powder Coat) **A** (Mill Finish Aluminum)
BSP (Black Suede Powder Coated Aluminum) **D** (Dark Bronze Anodized) **G** (Gold Anodized)
WSP (White Suede Powder Coated Aluminum)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

HEAVY DUTY PERIMETER GASKETING - STANDARD JAMB

- For the head section of the frame where a parallel arm closer bracket or other hardware is required. Supplied undrilled (36") or drilled (80" and above) and supplied with sheet metal screws for mounting
- If used as a stop, flat head machine screws can be provided upon request and take a countersunk #10 hole. Pemko will drill the head member only if drilling instructions for countersink holes are provided
- All gasketing shown below is sold individually

290_PK

AVAILABLE FINISHES:
10BE, 4E, A, BSP, D, G, WSP
REPLACEMENT INSERT: **PK47 (BL, GR)**
ANSI: **R3G164, R3G165**

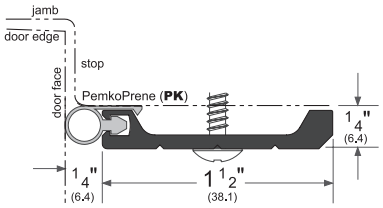

2902_V

AVAILABLE FINISHES:
10BE, 4E, A, BSP, D, G, WSP
REPLACEMENT INSERT: **EV59 (BL, GR, W)**

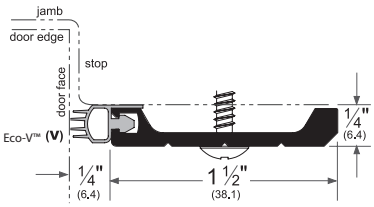

2903_V

AVAILABLE FINISHES:
10BE, 4E, A, BSP, D, G, WSP
REPLACEMENT INSERT: **EV60 (GR)**

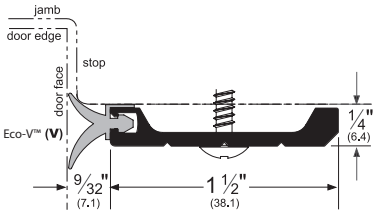

Alternate Inserts For 290

290_S

AVAILABLE FINISHES:
10BE, 4E, A, BSP, D, G, WSP
REPLACEMENT INSERT:
S3 (BL, W)
ANSI: **R3E164, R3E165**



290_V

AVAILABLE FINISHES:
10BE, 4E, A, BSP, D, G, WSP
REPLACEMENT INSERT:
EV47 (BL, GR, W)



2891_PK

1 per door standard

290_PK

2 per door standard



When ordering a head section such as 2891_PK, two corresponding side sections (i.e. 290_PK) should also be ordered for the latch and hinge sides of the frame.

PERIMETER GASKET JAMB BRACKETS

- For use with standard perimeter gasket profiles when opening utilizes a parallel arm closer
- Mount perimeter gasket first, then bracket over the profile. Closer bracket will mount to face of bracket.
- Furnished in paintable galvannealed steel (SP) or gray prime coat (G); available in powder coated finishes
- Supplied in 6" lengths

BKT050_

AVAILABLE FINISHES: **10BE, BSP, SP, G, WSP**



BKT075_

AVAILABLE FINISHES: **10BE, BSP, SP, G, WSP**



NOTE: Products shown in this section may not be drawn to scale.
AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
(see General Information section for finish chart)
10BE (Satin Bronze Powder Coated Aluminum) **4E** (Translucent Brass Powder Coat) **A** (Mill Finish Aluminum)
BSP (Black Suede Powder Coated Aluminum) **D** (Dark Bronze Anodized) **G** (Gold Anodized)
WSP (White Suede Powder Coated Aluminum)
AVAILABLE BRACKET FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
G (Gray Prime Painted Steel) **SP** (Galvanized Steel)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY
Experience a safer and more open world

SNAP COVER PERIMETER GASKETING WITH CONCEALED FASTENERS

- Low-profile snap cover conceals mounting screws to provide security and a clean aesthetic appearance
- Cover snaps securely in place to deter vandalism
- All clear anodized brush products are supplied with gray brush (black brush available upon request)

29310_V

AVAILABLE FINISHES: **10BE, BSP, C, D, G, WSP**
REPLACEMENT INSERT: **EV41 (BL, GR, W)**



29310_P

AVAILABLE FINISHES: **10BE, BSP, C, D, G, WSP**
REPLACEMENT INSERT: **P2 (BL, GR)**



29310_PK

AVAILABLE FINISHES: **10BE, BSP, C, D, G, WSP**
REPLACEMENT INSERT: **PK4 (BL, GR)**
ANSI: **R3G164, R3G165**



29313_PK

AVAILABLE FINISHES: **10BE, BSP, C, D, WSP**
REPLACEMENT INSERT: **PK588 (BL)**



29326_NB

AVAILABLE FINISHES: **10BE, BSP, C, D, G, WSP**
REPLACEMENT INSERT: **P516062 (BL, GR, W)**
ANSI: **R3A164, R3A165**

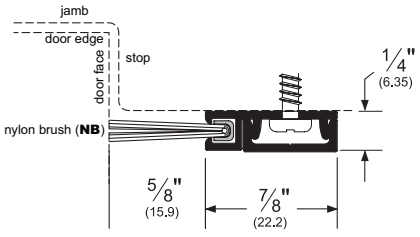

29344_NB

AVAILABLE FINISHES: **10BE, BSP, C, D, G, WSP**
REPLACEMENT INSERT: **P516041 (BL, GR)**
ANSI: **R3A164**

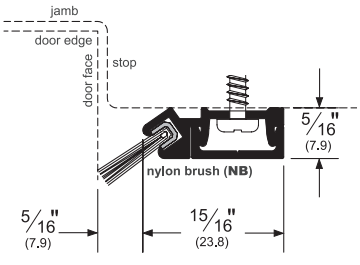

29346_NB

AVAILABLE FINISHES: **10BE, BSP, C, D, G, WSP**
REPLACEMENT INSERT: **P516062 (BL, GR, W)**
ANSI: **R3A164**

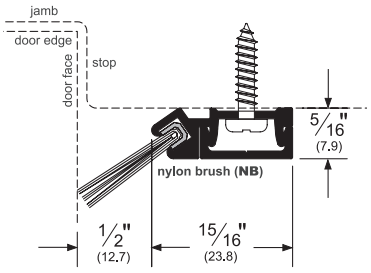

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
10BE (Satin Bronze Powder Coated Aluminum) **BSP** (Black Suede Powder Coated Aluminum) **C** (Clear Anodized)
D (Dark Bronze Anodized) **G** (Gold Anodized) **WSP** (White Suede Powder Coated Aluminum)

800-824-3018 | www.pemko.com
Check the web site for the up-to-date catalog

PEMKO
ASSA ABLOY
Experience a safer and more open world

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

KERF-IN WEATHERSTRIP

Foam

- Pemko's "Q" foam kerf-in weatherstrip is constructed from soft cell foam enclosed by an embossed, tear-resistant, low-friction, UV-stable polyethylene cover
- Includes rigid PVC insert with extended flange for fast and easy kerf installation

Q102_

AVAILABLE FINISHES: **BL, D, W**
AVAILABLE LENGTHS: **36", 85", 97", 121"**
Minimum space between the door face and the stop is 5/16"; maximum space is 1/2"



Q103_

AVAILABLE FINISHES: **BL, D, W**
AVAILABLE LENGTHS: **36", 85", 97", 121"**
Minimum space between the door face and the stop is 3/16"; maximum space is 5/16"



Q106_

AVAILABLE FINISHES: **D, W**
AVAILABLE LENGTHS: **36", 85", 97"**
Minimum space between the door face and the stop is 5/16"; maximum space is 1/2"



Q107_

AVAILABLE FINISHES: **BL**
Minimum space between the door face and the stop is 1/8"; maximum space is 7/16"
Sold per foot (specify length)



Q108_

AVAILABLE FINISHES: **BL**
Minimum space between the door face and the stop is 1/8"; maximum space is 1/2"
Sold per foot (specify length)



Silicone

- Extruded from platinum cross-linked silicon
- Self-extinguishing and non-toxic
- Unaffected by sunlight, ozone, and ultraviolet rays
- Impervious to fungus and mildew; will not deteriorate under normal exposure
- Available in 100ft lengths

S104_100

AVAILABLE FINISHES: **D, W**
ANSI: **R0E156**
Minimum space between the door face and the stop is 1/16"; maximum space is 1/4"



S109_100

AVAILABLE FINISHES: **D, W**
ANSI: **R0E156**
Minimum space between the door face and the stop is 1/16"; maximum space is 5/16"



S105_100

AVAILABLE FINISHES: **D**
ANSI: **R0E156**
Minimum space between the door face and the stop is 1/16"; maximum space is 3/8"



S52_ 100

AVAILABLE FINISHES: **BL, W**
ANSI: **R0E154**
Minimum space between the door face and the stop is 1/16"; maximum space is 3/8"



NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
BL (Black) **D** (Black) **W** (White)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY
Experience a safer and more open world

KERF-IN WEATHERSTRIP *(Cont.)*

PK52_

AVAILABLE FINISHES: **BL**
ANSI: **R0G154**
AVAILABLE LENGTHS: **18', 20', 300'**

- Minimum space between the door face and the stop is 1/16"; maximum space is 3/8"

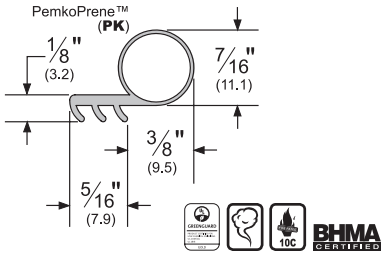

P50_

AVAILABLE FINISHES: **BL**
AVAILABLE LENGTHS: **17', 25', 250'**

- Minimum space between the door face and the stop is 1/16"; maximum space is 5/16".
- Thermoplastic elastomer formulation will not transmigrate; remains flexible to -60° F



MAG349_

AVAILABLE FINISHES: **D**
AVAILABLE LENGTHS: **37", 85", 96", 121"**

- Minimum space between the door face and the stop is 3/8"; maximum space is 7/16"
- Magnetic kerf-in weatherstrip features a magnetic strip encased by a UV-stable TPE cover
- Use for steel-faced door and wood frame applications
- Can be trimmed in the field and corner-mitered



MAGNETIC WEATHERSTRIP

2815_M

AVAILABLE FINISHES: **C, D, G**
REPLACEMENT INSERT: **2815MAG**

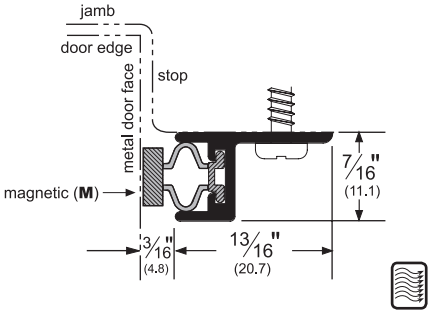

ADHESIVE PERIMETER GASKETING

For more information on these perimeter gasketing products, please see the Adhesive Gasketing section.

S773_

AVAILABLE FINISHES: **BL, GR, W**
AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 250', 510'**
ANSI: **R0E154, R0E155**

- Triple-fin design blocks light and sound from infiltrating a room
- Product designed as hospitality gasketing (see more hospitality products in the Hospitality Products section)
- Seal begins compressing at 3/8"



S88_

AVAILABLE FINISHES: **BL, C, D, GR, TAN, W**
AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 204', 510'**
ANSI: **R0E154, R0E155**

- Seal begins compressing at 1/4"; compresses to seal up to a 1/16" gap
- Available with perforations for Behavioral Health applications. Substitute "P" in place of "S" to order this option.



S44_

AVAILABLE FINISHES: **BL, C, GR, W**
AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 204', 510'**
ANSI: **R0E154, R0E155**

- Designed for tighter frames.
- Demonstrates extremely low closing force.
- Seal begins compressing at 5/16"; compresses to seal up to a 1/16" gap
- Available with perforations for Behavioral Health applications. Substitute "P" in place of "S" to order this option.



NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
C (Clear Anodized) **D** (Dark Bronze Anodized) **G** (Gold Anodized)

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
Adhesive Gasketing Colors: **BL** (Black) **C** (Clear) **D** (Dark Brown) **GR** (Light Gray) **TAN** (Tan) **W** (White)

PEMKO
ASSA ABLOY
Experience a safer and more open world

800-824-3018 | www.pemko.com
Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

ADHESIVE PERIMETER GASKETING *(Cont.)*

For more information on these perimeter gasketing products, please see the Adhesive Gasketing section.

S442_

AVAILABLE FINISHES: **BL, D, W**
AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 510'**
ANSI: **R0E154, R0E155**

- Fits flush into corner
- Seal begins compressing at 5/16"; compresses to seal up to a 1/16" gap



S776_

AVAILABLE FINISHES: **BL**
AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30'**
ANSI: **R0E154, R0E155**

- Designed for hollow metal and wood meeting stile applications
- Seal begins compressing at 3/8"



S771x6_

AVAILABLE FINISH: **BL**
AVAILABLE LENGTHS: **7', 8', 10', 17', 18', 20', 21', 25'**
ANSI: **R0E154, R0E155**

- Designed for hollow metal and wood meeting stile applications
- Seal begins compressing at 5/16"



S77_

AVAILABLE FINISHES: **C, BL, D**
AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 204', 510'**
ANSI: **R0E154, R0E155**

- Designed for hollow metal and wood meeting stile applications.
- Seal begins compressing at 5/16"; compresses to seal up to a 1/16" gap



PK33_

AVAILABLE FINISHES: **BL, W**
AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 510'**
ANSI: **R0G154, R0G155**

- Designed for tighter frames.
- Demonstrates extremely low closing force.
- Seal begins compressing at 3/16"; compresses to seal up to a 1/16" gap



PK55_

AVAILABLE FINISHES: **BL, W**
AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 510'**
ANSI: **R0G154, R0G155**

- Designed for tighter frames.
- Demonstrates extremely low closing force.
- Seal begins compressing at 3/16"; compresses to seal up to a 1/16" gap



MICROSHIELD® ANTIMICROBIAL ADHESIVE GASKETING

AM88_

AVAILABLE FINISHES: **BL, C, D, W**
AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 510'**
ANSI: **R8E154, R0E155**



MicroShield™

NOTES FOR ALL ADHESIVE GASKETING:

Storage and shelf life: All adhesive gaskets have a limited shelf life. This product must be installed within 6 months of purchase and must be stored between 50°F and 100°F. For further notes/details, please see Adhesive Gasketing section.

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
Adhesive Gasketing Colors: **BL** (Black) **C** (Clear) **D** (Dark Brown) **W** (White)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY
Experience a safer and more open world

EXCESSIVE GAP PERIMETER SOLUTIONS

XGSHIM Latch Shim

- Meets UL10C standards for 90-minute wood and metal doors
- For use on excessive gaps on the frame behind the strike plate
- Certified in USA & Canada
- Two product numbers, XGSHIM234 and XGSHIM478



XGSHIM234

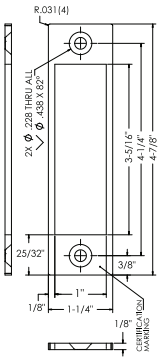

XGSHIM478

XG90KIT

- Brings fire-rated doors with excessive vertical and head gaps back into spec - up to 3/8"
- UL Classified for 90-minutes
- Kit includes both products shown below, XG900 and HSS20XGxS773

XG900

- 16ga galvannealed steel
- Can be screw applied or welded to metal frame. If welded, specify with "no holes" for clean appearance.
- Can be field painted to match the frame

AVAILABLE FINISH: **SP**



IS47

EZgap™ XG10 SERIES

- Flexible, adhesive-applied solution for excessive gaps up to 5/16"
- Can be used as a full perimeter system or used independently on Latch Edge, Hinge Edge, or Header
- Meets UL10C requirements for singles or pairs of doors with excessive gaps:
  - XG10:
    - Gaps up to 1/4". 60 minutes for wood doors, 90 minutes for hollow metal doors
  - XG10-HM:
    - Gaps up to 5/16". 90 minutes for hollow metal doors
    - Kitted with the HSS90150XG rigid intumescent strip for top door channel

AVAILABLE FINISH: **BL (Black), BR (Brown), GR (Grey), W (White)**

AVAILABLE LENGTHS: **18 ft, 50 ft Rolls**

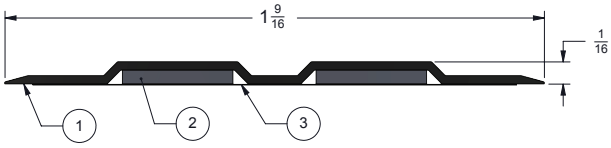

IS47

HSS20XGxS773

- Pressure sensitive adhesive backing
- Seals a gap at the header or along the jambs up to 5/16" for 60-min openings
- Seals a gap along the latch edge up to 3/8" for 90-min openings when used with the XG900SP in the XG90KIT

AVAILABLE FINISH: **BL**

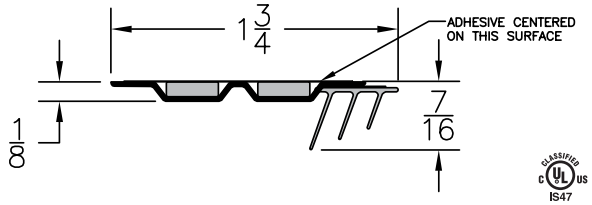

IS47

INTERLOCK WEATHERSTRIP FOR WOOD WINDOWS

Corrugated Rib Strips

- Corrugated rib strips are made from .015" spring bronze (B) or .0172" galvannealed steel (Z)
- _4C is only available in 96" lengths

_4C (1 3/8" width)

AVAILABLE FINISHES: **B, Z**



Flat Hooks

- _10 Flat hooks are made from .026" spring bronze (B) or .0172" galvannealed steel (Z)

_10

AVAILABLE FINISHES: **B, Z**

AVAILABLE LENGTHS: **96"**



Plain Rib Strips

- Plain rib strips are made from .015" spring bronze (B) or .0172" galvannealed steel (Z)

_2P (1" width)

AVAILABLE FINISHES: **B, Z**



_4P (1 3/8" width)

AVAILABLE FINISHES: **Z**

_2P (1" width) shown at left; also available in _4P (1 3/8" width). _2P and _4P available in 96" lengths only

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE

SP10BE (Satin Bronze Powder) **B** (Bronze) **SPBSP** (Black Suede Powder)
SP (Galvannealed Steel) **SPWSP** (White Suede Powder) **Z** (Galvannealed Steel)

PEMKO
ASSA ABLOY

Experience a safer and more open world

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

INTERLOCK WEATHERSTRIP FOR WOOD DOORS

- Fasteners available at additional cost

"L" Metal

- Bronze or zinc-plated wafer head drive screws available for _41M (sold separately)

_41M

AVAILABLE FINISHES: **B, Z**
AVAILABLE LENGTHS: **96"**



_43

AVAILABLE FINISH: **B**
AVAILABLE LENGTHS: **96"**



CUSHION/SPRING WEATHERSTRIP FOR WOOD OR METAL DOORS AND WINDOWS

Spring Bronze - Wood Doors/Windows

- Spring bronze weatherstrip fits wood doors and wood casement windows
- Made from .008" hemmed spring bronze/brass (B)
- Nails should be approximately 1½" on center (sold separately)

_70C-100

AVAILABLE FINISH: **B**
AVAILABLE LENGTHS: **100'**



_70E-100

AVAILABLE FINISH: **B**
AVAILABLE LENGTHS: **100'**



P51B17

P51B17 is 17 feet of _70C
Packaged with nails

CUSHION ("V") - WOOD OR METAL DOORS

- Cushion weatherstrip fits wood or metal doors
- Made from .008" hemmed spring bronze/brass (B)
- Nails should be approximately 3" on center (sold separately)
- Gap coverage is 1⁄8" minimum to 3⁄16" maximum

_73

AVAILABLE FINISH: **B**
AVAILABLE LENGTHS: **96"**



_74

AVAILABLE FINISH: **B**
AVAILABLE LENGTHS: **96"**



_75

AVAILABLE FINISH: **B**
AVAILABLE LENGTHS: **96"**



FASTENERS FOR CUSHION, SPRING AND INTERLOCK WEATHERSTRIP

- Fasteners for cushion, spring, and interlock weatherstrip are sold separately unless otherwise specified

NL1678_

AVAILABLE FINISHES: **BL, BP, Z**
For Wood: #16 x 7⁄8" flat head nail



NL1734CPXE_

AVAILABLE FINISHES: **BB, SS**
For Wood: #16 x 3⁄4" flat head nail



NOTE: Copper nails may be substituted for "BB" nails while brass remains unavailabile.

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY
Experience a safer and more open world

PRIVACY SEALS FOR SLIDING DOORS

PEMKOSFSET1

- Will seal gaps 1/8" to 3/8" for barn door sliding hardware
- Works with any sliding door hardware
- Requires 1/2" frame to keep the gasket from marring the wall

369



S773



Standard Kit Sizes		
Finish	Product	Color
C	369C S773GR	Clear Anodized Gray
D	369D S773BL	Dark Bronze Anodized Black
PW	369C S773PW	Clear Anodized White

PEMKOSFSET2

- Will seal gaps 1/8" to 3/8" for barn door sliding hardware
- Works with any sliding door hardware
- Requires 1/2" frame to keep the gasket from marring the wall
- Includes a surface mounted bottom seal

369



S773



18061_NB



Standard Kit Sizes		
Finish	Product	Color
C	369C S773GR 18061CNB	Clear Anodized Gray Clear Anodized, Gray Brush
D	369D S773BL 18061DNB	Dark Bronze Anodized Black Dark Bronze Anodized, Black Brush
PW	369C S773PW 18061PWNB	Clear Anodized White Painted White

PEMKOSFSET3

950 PY900 394 29394



Standard Kit Sizes		
Finish	Product	Color
10BE	29394-10BE-PK 394-10BE 950-10BE PY900BL	Satin Bronze Powder Coat with Black PemkoPrene™ Satin Bronze Powder Coat Satin Bronze Powder Coat Black
C	29394CPK 394C 950C PY900BL	Clear Anodized with Black PemkoPrene™ Clear Anodized Clear Anodized Black
BSP	29394BSPPK 394BSP 950BSP PY900BL	Black Suede Powder Coat with Black PemkoPrene™ Black Suede Powder Coat Black Suede Powder Coat Black
D	29394DPK 394D 950D PY900BL	Dark Bronze Anodized with Black PemkoPrene™ Dark Bronze Anodized Dark Bronze Anodized Black
WSP	29394WSPPK 394WSP 950WSP PY900BL	White Suede Powder Coat with Black PemkoPrene™ White Suede Powder Coat White Suede Powder Coat Black

PEMKOSFSET4

950 PY900 29326_NB 394 29394

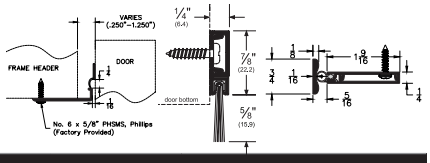

Standard Kit Sizes		
Finish	Product	Color
10BE	29394-10BE-PK 394-10BE 950-10BE PY900BL 29326-10BE-NB	Satin Bronze Powder Coat with Black PemkoPrene™ Satin Bronze Powder Coat Satin Bronze Powder Coat Black Satin Bronze Powder Coat with Black Nylon Brush
C	29394CPK 394C 950C PY900BL 29326CNB	Clear Anodized with Black PemkoPrene™ Clear Anodized Clear Anodized Black Clear Anodized with Gray Nylon Brush
BSP	29394BSPPK 394BSP 950BSP PY900BL 29326BSPNB	Black Suede Powder Coat with Black PemkoPrene™ Black Suede Powder Coat Black Suede Powder Coat Black Black Suede Powder Coat with Black Nylon Brush
D	29394DPK 394D 950D PY900BL 29326DNB	Dark Bronze Anodized with Black PemkoPrene™ Dark Bronze Anodized Dark Bronze Anodized Black Dark Bronze Anodized with Black Nylon Brush
WSP	29394WSPPK 394WSP 950WSP PY900BL 29326WSPNB	White Suede Powder Coat with Black PemkoPrene™ White Suede Powder Coat White Suede Powder Coat Black White Suede Powder Coat with White Nylon Brush

PEMKOSFSET5

950 PY900 394 29394 Planet SN



Standard Kit Sizes		
Finish	Product	Color
10BE	29394-10BE-PK 394-10BE 950-10BE PY900BL SN-RD-A	Satin Bronze Powder Coat with Black PemkoPrene™ Satin Bronze Powder Coat Satin Bronze Powder Coat Black Aluminum with Black Silicone
C	29394CPK 394C 950C PY900BL SN-RD-A	Clear Anodized with Black PemkoPrene™ Clear Anodized Clear Anodized Black Aluminum with Black Silicone
BSP	29394BSPPK 394BSP 950BSP PY900BL SN-RD-A	Black Suede Powder Coat with Black PemkoPrene™ Black Suede Powder Coat Black Suede Powder Coat Black Aluminum with Black Silicone
D	29394DPK 394D 950D PY900BL SN-RD-A	Dark Bronze Anodized with Black PemkoPrene™ Dark Bronze Anodized Dark Bronze Anodized Black Aluminum with Black Silicone
WSP	29394WSPPK 394WSP 950WSP PY900BL SN-RD-A	White Suede Powder Coat with Black PemkoPrene™ White Suede Powder Coat White Suede Powder Coat Black Aluminum with Black Silicone

PEMKO
ASSA ABLOY

Experience a safer and more open world

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.