



CONTENTS:

H180A Series	212
SHS80 Series	213
Sliding 200 Series	214
Side Wall Track (SWT) System	215
Bypass Track Series	218
SIM200A Series	219
LP200 Series	220
LBP75A	221
Sirocco Series	222
H440A-OH Series	223
H440A-SW Series	224
TBS200A-OH Series	225
TBS200A-SW Series	226
TBS250A-OH Series	227
TBS250A-SW Series	228
H600S-OH Series	229
H600S-SW Series	230
H800S-OH Series	231
H800S-SW Series	232
H1100A-OH Series	233
H1100A-SW Series	234
Pocket Frame Kit	235
Folding 100 Series	236
Pacer Interior End Fold Series	237
Hide Slide	238
Flexirol Interior End Fold Series	239
Stainless Steel Sliding Track Hardware System for Wood Doors	240
Builders Series Flat Track for Wood Doors	248
Designer Series Flat Track for Wood Doors	250
SIM 150 - 2 Door	252
SIM 150 - 3 Door	253
Cascading Door with Sample Configurations	254
PemkoMatic™ Sliding Door Operator	255
PemPass™	256
Options and Accessories	258
Privacy Seal Sets	258
Soft Close Systems	259


INDEX:

PRODUCT	PAGE	PRODUCT	PAGE	PRODUCT	PAGE	PRODUCT	PAGE	PRODUCT	PAGE	PRODUCT	PAGE
1A/301	230	102WA	215	287R1-KIT	218	EPD3	248	HF2/100PACK	258	PF-SP6-KIT	235
1A/301/EC	229	102WA	219	289B	236	EPD3	252	HF4/100	236	PIF2/165A	237
1A/550	234	102WA	224	289T	236	F134	212	HH3/301	229	PIF4/165A	237
1AX/301	230	102WA	232	301	229	F134	218	Hide Slide	238	PSLIDE	255
1AX/301	232	102WA	258	403/2	237	F134	252	K28_SWEP	215	SDL	257
1B	224	102WN	212	550A	233	F134	258	K134EP	213	SHS80	213
1BX	224	102WN	219	550A	239	F160C	223	K134EP	219	SIM100	219
3A/301	229	102WN	224	556/21	239	F160ECP	223	K134EP	258	SIM150	252
3A/301	231	102WN	230	556/57	233	F200C	224	K1077_SWEP	212	SIM150-BOLTKIT	252
3AX/301	229	102WN	232	600A	223	F200ECP	224	LBP75A	221	SIM150-LOCKKIT	252
3AX/301	231	102WN	248	600A	237	FIF2/275A	239	LH100	220	SIM200A	219
21/550/P	239	106HF/94	236	601H	213	H180A	212	LP200A	220	SIRLH/SIRRH	222
21BO/4	237	106N/94	258	601H	219	H200	214	PemPass™	256	SOFT CLOSE	259
21B/P	237	106R/94	212	601H	254	H200	215	PF2x6KIT	235	STOP3	240
21N/94	237	106R/94	258	601H	258	H200PACK	214	PF28200A	235	STOP3	242
21R/94	239	111	245	601P	223	H200PACK	215	PFAS	235	STOP3	247
57A/N	231	280	212	1075C	212	H200PACK	258	PFAS88	235	TBS200A-OH	225
57A/S	229	280	219	1076	254	H222R1	212	PFAS100	235	TBS200A-SW	226
57B	223	280	236	2802	218	H222R1	235	PFBG-4	235	TBS250A-OH	227
62	240	280A-SWT	215	2802	254	H222R1	254	PFBG-4	258	TBS250A-SW	228
72	243	280_SWF	215	2802BT	218	H440A-OH	223	PFBG-8	235	W60 to W100	240
82	244	280_SWTKIT	215	2802BT	258	H440A-SW	224	PFBG-8	258		
94A	212	281	213	2803	252	H600S-OH	229	PFBG-8	258		
94A	236	281	219	2812	218	H600S-SW	230	PFBG-8	258		
94A	258	281	236	2812	254	H800S-OH	231	PFBG-8	258		
102N	212	281	258	2812	258	H800S-SW	232	PFBG-8	258		
102N	240	282HD	236	BAR	240	H1100A-OH	233	PFBG-8	258		
102N	248	283	236	BRACKET2	240	H1100A-SW	234	PFBG-8	258		
102N	258	287R1-KIT	212	EPD3	212	HBP200A	218	PFBG-8	258		
102WA	212	287R1-KIT	214	EPD3	218	HF2/100	236	PFBG-8	258		
102WA	214	287R1-KIT	215	EPD3	240	HF2/100PACK	236	PFBG-8	258		


H180A SERIES

For Sliding Panels up to 200 lbs.

Overhead Mount

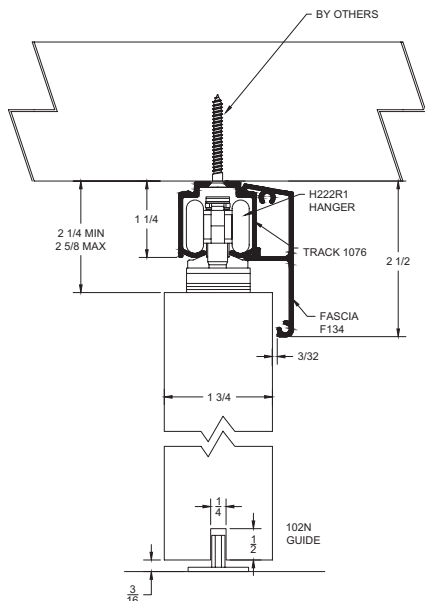

Side Wall Mount

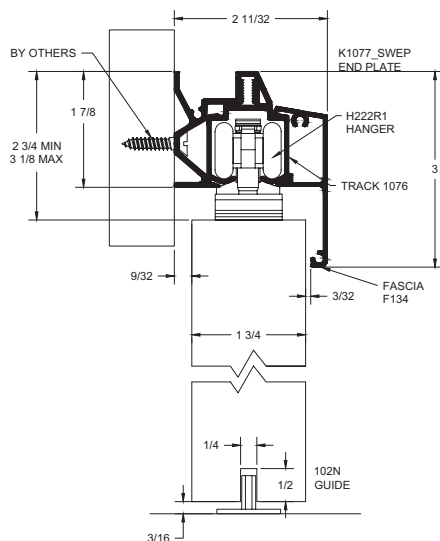

Configurations:

- Single
- Bi-parting

Installations:

- Overhead Mount
- Side Wall Mount

Features:

- Hanger body is made of nickel plated zinc alloy for durability and long life
- Steel ball bearing wheels coated in nylon for smooth operation
- 200 lb. panel capacity
- Optional side wall bracket reduces the amount of wall space needed to mount the track
- 5 year warranty
- Meets ADA push force requirements

H180A Kits Include:

- 1 ea **280C** Clear Anodized Aluminum Track
- 2 ea **H222R1** - Nickel Plated Zinc Alloy Body
Zinc Alloy Wheels Coated in Nylon
- 2 ea **287R1-KIT** Rubber Bumper In-Track Stop
- 1 ea **102N** White Nylon Mortise Guide

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
H180A/6	Aluminum	72"	36"
H180A/8	Aluminum	96"	48"

Options:

Fascia

F134C clear anodized aluminum fascia

F134D dark bronze anodized fascia

Side Wall Track Bracket

1075C clear anodized aluminum bracket- order same length as track

Track

280D dark bronze anodized track

End Plate Kit

K1077C-SWEP (use with F134C fascia and 1075C side wall bracket only)

Bottom Channel

94A

Roller Guide

106R/94

Threshold

971A

Side Wall Mount

102WN (nylon) and **102WA** (steel)

Mortise Guides

Polypropylene Guide Rail


EPD3BL for use with 102N or 102WN

Bottom guide

138N-SG1KIT Surface mounted bottom guide for 1 3/8" door panels

Soft Close available. See pages 256-258 for more information.

Alternate Route for EPD3BL

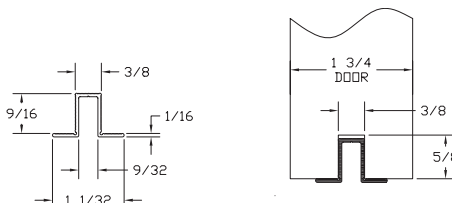

PEMKO
ASSA ABLOY


Experience a safer
and more open world

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.


SHS80 SERIES

For Sliding Panels up to 200 lbs.

Overhead Mount

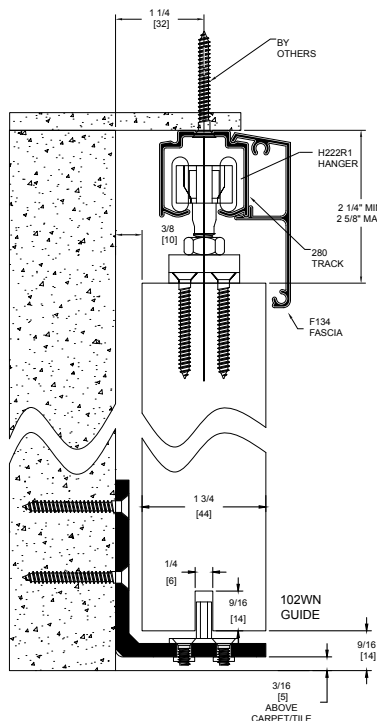

Side Wall Mount

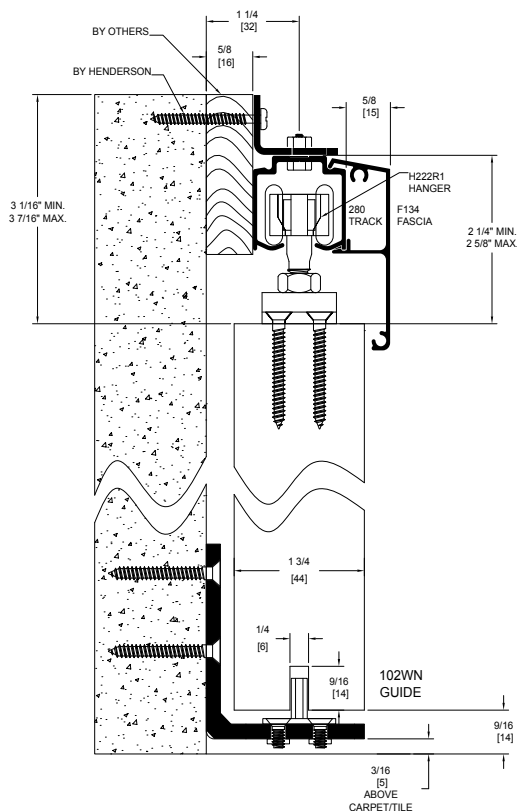

Configurations:

- Single
- Bi-parting

Installations:

- Overhead Mount
- Side Wall Mount

Features:

- Hanger body is made of nickel plated zinc alloy for durability and long life
- Steel ball bearing wheels coated in nylon for smooth operation
- 200 lb. panel capacity
- Optional Soft Close
- 5 year warranty
- Meets ADA push force requirements

SHS80 Kits Include:

- 1 ea **280C** Clear Anodized Aluminum Track
- 2 ea **H222R1** - Nickel Plated Zinc Alloy Body
- 2 ea **601H** Nylon In-Track Clip Stop
- 1 ea **102WN** White Nylon Mortise Guide on Zinc Plated Steel "L" Metal

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
SHS80/6	Aluminum	72"	36"
SHS80/8	Aluminum	96"	48"

Options:

Fascia

F134C clear anodized aluminum fascia

F134D dark bronze anodized fascia

Side Wall Track Brackets

PC2815 available as 5 pack only, PC2815 pack of 5 281 zinc plated side wall bracket. NOTE: Need one at each end and no more than 2 feet in-between. Fasteners included.

Track

280D dark bronze anodized track

End Plate Kit

K134EP (use with F134C and 280C only)

Bottom Channel

94A

Roller Guide

106R/94

Side Wall Mount

SHS80/PACK

Extra Hardware Pack

102N

Mortise Floor Guide

EPD3BL for use with 102N or 102WN


Polypropylene Guide Rail

138N-SG1KIT Surface mounted bottom guide for 1 3/8" door panels

Bottom guide

Soft Close available. See pages 256-258 for more information.

Alternate Route for EPD3BL

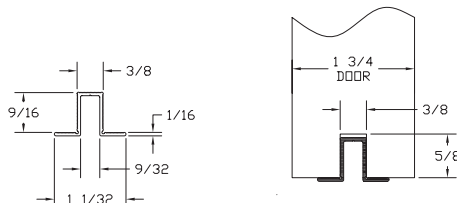

PEMKO
ASSA ABLOY

Experience a safer
and more open world

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog


Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

SLIDING 200 SERIES


For Sliding Panels up to 200 lbs.

Manufactured by P.C. Henderson

280C Side Wall Mounted

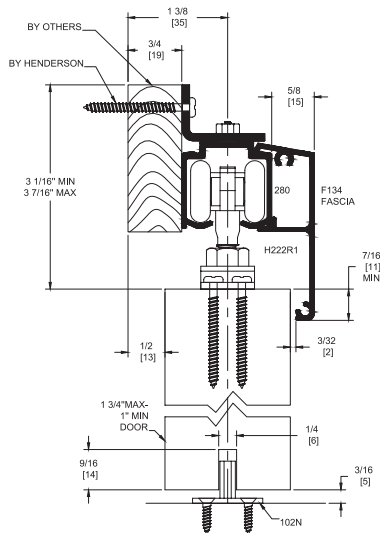

280C Soffit Mounted with Fascia

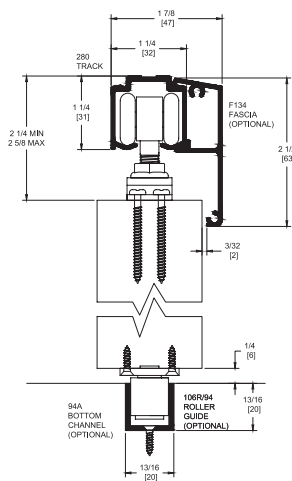

Configurations:

- Single
- Bi-parting

Installations:

- Overhead Mount
- Side Wall Mount

Features:

- Hanger body is made of nickel plated zinc alloy for durability and long life
- Steel ball bearing wheels coated in nylon for smooth operation
- 200 lb. panel capacity
- Galvanized steel track 280
- Clear anodized aluminum track 280C
- Optional Soft Close
- 5 year warranty
- Meets ADA push force requirements

H200A Kits Include:

- 1 ea **280C** Clear Anodized Aluminum Track
- 2 ea **H222R1** Hangers
- 1 ea **102N** Nylon Guide
- 2 ea **TELS-14KIT** Stops
- 1 ea Adjusting Wrench and Mounting Hardware

H200 Kits Include:

- 1 ea **280** Steel Track
- 2 ea **H222R1** Hangers
- 1 ea **102N** Nylon Guide
- 2 ea **TELS-14KIT** Stops
- 1 ea Adjusting Wrench and Mounting Hardware

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
H200A/4	Aluminum	48"	24"
H200A/6	Aluminum	72"	36"
H200A/7	Aluminum	84"	42"
H200A/8	Aluminum	96"	48"
H200A/10	Aluminum	120"	60"
H200A/12	Aluminum	144"	72"
H200/6	Steel	72"	36"
H200/8	Steel	96"	48"

Options:

Hardware Kit
Mounting Bracket

Track Stop (bumper)
Bottom Channel
Fascia, Snap-On

Track
Roller Guide
Side Wall Mortise Guide
End Plate
Polypropylene Guide Rail
Bottom guide

Soft Close available. See pages 256-258 for more information.

H200PACK

PC2815 available as 5 pack only, **PC2815** pack of 5 281 zinc plated side wall bracket
NOTE: Need one at each end and no more than 2 feet in-between. Fasteners included.

287R1-KIT

94A

F134C clear anodized
(**280C** aluminum track only)

F134D dark bronze anodized fascia

280D dark bronze anodized

106R/94

102WA (steel) and **102WN** (nylon)

K134EP (use with F134C and 280C only)

EPD3BL for use with 102N or 102WN

138N-SG1KIT Surface mounted bottom guide for 1 3/8" door panels

PEMKO
ASSA ABLOY

Experience a safer
and more open world


SIDE WALL TRACK (SWT) SYSTEM

For Sliding Panels up to 200 lbs.

The Pemko Side Wall Track System has a unique mounting bracket that is extruded with the track. An innovative wall mounted bottom guide assembly allows carpet to be replaced without removing the door.



SWT Kit Side Wall Mounted

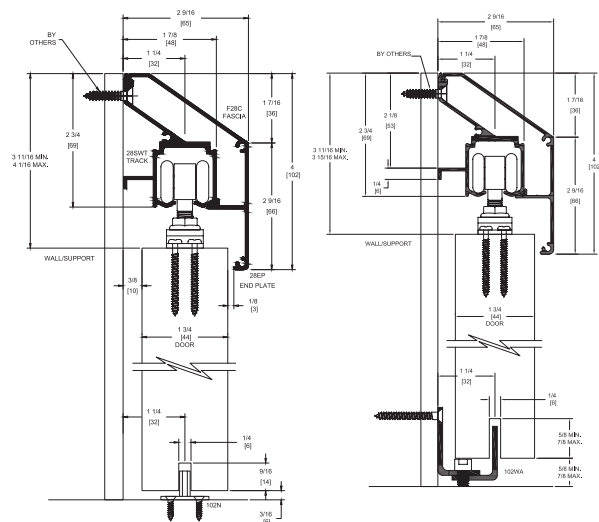

Configurations:

- Single
- Bi-parting

Installations:

- Side Wall Mount

Features:

- Unique mounting bracket extruded into track
- Supports up to 200 lbs. per door
- Quick, easy attachment
- New construction or retrofit
- Optional Soft Close
- 5 year warranty
- Meets ADA push force requirements

280SWT Kits Include:

- 1ea **280A-SWT** Aluminum Track
- 1ea **280_-SWF** Aluminum Fascia
- 1ea **K28_-SWEP** Pair of End Plates
- 2ea **H222R1** Hangers
- 2ea **TELS-14KIT** In Track Stops
- 1ea **102N** White Nylon Mortise Guide
- 1ea **102WA** Wall Mounted Mortise Guide
- 1ea Adjusting Wrench

Standard Kit Sizes

PART NUMBER	TRACK LENGTH	DOOR WIDTH
(Mill Finished Track/Clear Anodized Fascia/End Plates)		
280C-SWTKIT/6	72"	36"
280C-SWTKIT/8	96"	48"
280C-SWTKIT/12*	144"	2 @ 36"
(Mill Finished Track/Dark Bronze Anodized Fascia/End plates)		
280D-SWTKIT/6	72"	36"
280D-SWTKIT/8	96"	48"
280D-SWTKIT/12*	144"	2 @ 36"

*NOTE: 280_-SWTKIT/12 comes with enough hardware for two doors.

Options:

- Hardware Kit (one door) **H200PACK**
- Roller Guide **106R/94**
- Bottom Channel **94A**
- Nylon Mortise Guide **102WN**
- Stainless Steel Flush Bolt **FB150SS**
- Stainless Steel Flush Pull **503SF**
- Bottom guide **138N-SG1KIT** Surface mounted bottom guide for 1 3/8" door panels

Soft Close available. See pages 256-258 for more information.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE

A (Mill Finish Aluminum) C (Anodized Aluminum) D (Dark Bronze Anodized)

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY



Experience a safer
and more open world

SIDE WALL TRACK SYSTEM WITH RADIUS FASCIA (RF280_-SWTK)

For Sliding Panels up to 200 lbs.

Pemko Side Wall Track Systems have a unique mounting bracket that is extruded with the track. An innovative wall mounted bottom guide assembly allows carpet to be replaced without removing the door.

SWT Kit Side Wall Mounted

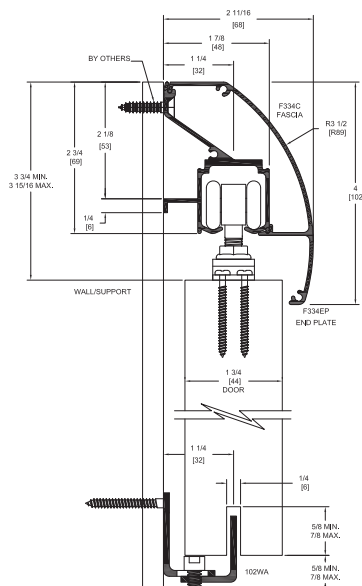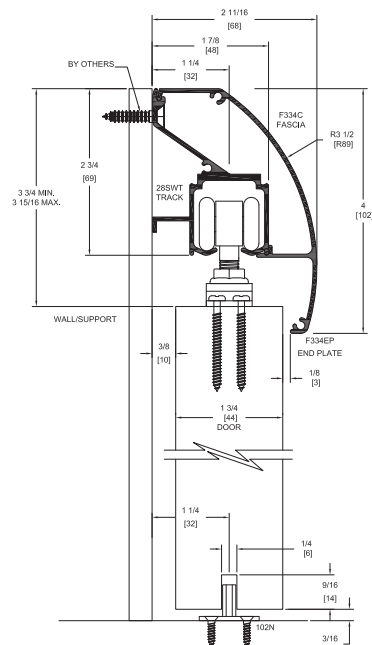

PEMKO
ASSA ABLOY

Experience a safer
and more open world

Configurations:

- Single
- Bi-parting

Installations:

- Side Wall Mount

Features:

- Unique mounting bracket extruded into track
- Supports up to 200 lbs. per door
- Quick, easy attachment
- New construction or retrofit
- Optional Soft Close
- 5 year warranty
- Meets ADA push force requirements

RF280 SWT Kits Include:

- 1ea **280A-SWT** Aluminum Track
- 1ea **F334_** Aluminum Fascia
- 1ea **KF334_-SWEP** Pair of End Plates
- 2ea **H222R1** Hangers
- 2ea **TELS-14KIT** In Track Stops
- 1ea **102N** White Nylon Mortise Guide
- 1ea **102WA** Wall Mounted Mortise Guide
- 1ea Adjusting Wrench

Standard Kit Sizes

PART NUMBER	TRACK LENGTH	DOOR WIDTH
(Mill Finished Track/Clear Anodized Fascia/End Plates)		
RF280C-SWTK/6	72"	36"
RF280C-SWTK/8	96"	48"
RF280C-SWTK/12 *	144"	2 @ 36"
(Mill Finished Track/Dark Bronze Anodized Fascia/End plates)		
RF280D-SWTK/6	72"	36"
RF280D-SWTK/8	96"	48"
RF280D-SWTK/12 *	144"	2 @ 36"

*NOTE: RF280_-SWTK/12 comes with enough hardware for two doors.

Options:

- Hardware Kit (one door) **H200PACK**
 - Roller Guide **106R/94**
 - Bottom Channel **94A**
 - Nylon Mortise Guide **102WN**
 - Stainless Steel Flush Bolt **FB150SS**
 - Stainless Steel Flush Pull **503SF**
 - Bottom guide **138N-SG1KIT** Surface mounted bottom guide for 1 3/8" door panels
- Soft Close available. See pages 256-258 for more information.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
A (Mill Finish Aluminum) C (Clear Anodized) D (Dark Bronze Anodized)

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog



Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

SIDE WALL TRACK SYSTEM WITH SQUARE FASCIA (SF280_-SWTK)

For Sliding Panels up to 200 lbs.

Pemko Side Wall Track Systems have a unique mounting bracket that is extruded with the track. An innovative wall mounted bottom guide assembly allows carpet to be replaced without removing the door.

SWT Kit Side Wall Mounted

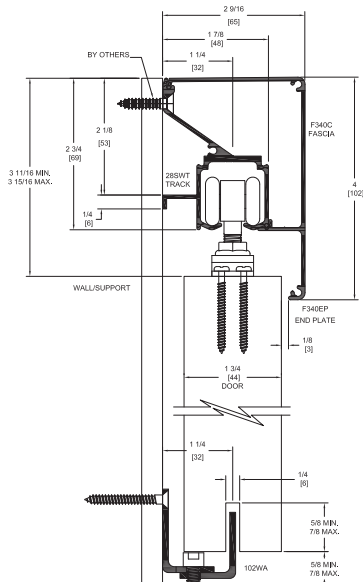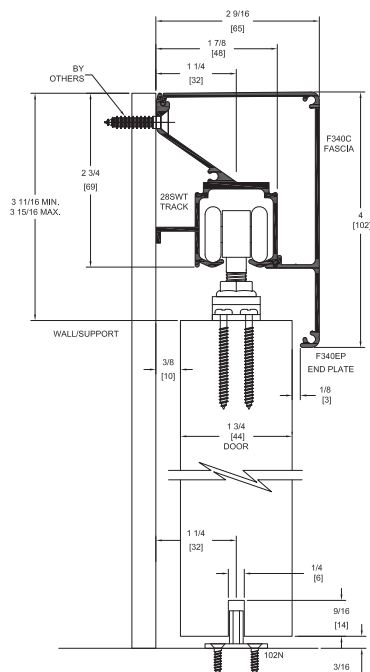

Configurations:

- Single
- Bi-parting

Installations:

- Side Wall Mount

Features:

- Unique mounting bracket extruded into track
- Supports up to 200 lbs. per door
- Quick, easy attachment
- New construction or retrofit
- Optional Soft Close
- 5 year warranty
- Meets ADA push force requirements

SF280SWT Kits Include:

- 1ea **280A-SWT** Aluminum Track
- 1ea **F340_** Aluminum Fascia
- 1ea **KF340_-SWEP** Pair of End Plates
- 2ea **H222R1** Hangers
- 2ea **TELS-14KIT** In Track Stops
- 1ea **102N** White Nylon Mortise Guide
- 1ea **102WA** Wall Mounted Mortise Guide
- 1ea Adjusting Wrench

Standard Kit Sizes

PART NUMBER	TRACK LENGTH	DOOR WIDTH
(Mill Finished Track/Clear Anodized Fascia/End Plates)		
SF280C-SWTK/6	72"	36"
SF280C-SWTK/8	96"	48"
SF280C-SWTK/12 *	144"	2 @ 36"
(Mill Finished Track/Dark Bronze Anodized Fascia/End plates)		
SF280D-SWTK/6	72"	36"
SF280D-SWTK/8	96"	48"
SF280D-SWTK/12 *	144"	2 @ 36"

*NOTE: SF280_-SWTK/12 comes with enough hardware for two doors.

Options:

- Hardware Kit (one door) **H200PACK**
- Roller Guide **106R/94**
- Bottom Channel **94A**
- Nylon Mortise Guide **102WN**
- Stainless Steel Flush Bolt **FB150SS**
- Stainless Steel Flush Pull **503SF**
- Bottom guide **138N-SG1KIT** Surface mounted bottom guide for 1 3/8" door panels
- Soft Close available. See pages 256-258 for more information.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE

A (Mill Finish Aluminum) C (Clear Anodized) D (Dark Bronze Anodized)

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.


PEMKO
ASSA ABLOY

Experience a safer
and more open world

BYPASS TRACK SERIES


For Bypass Panels up to 200 lbs.

1³/₄" Thick Doors Side Wall Mount

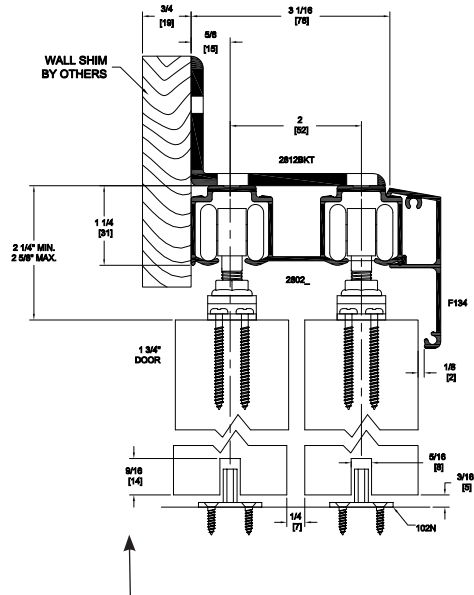

NOTE: Route door $\frac{9}{16}$ " deep by $\frac{1}{4}$ " wide to receive 102N Guide.

1³/₄" Thick Doors Overhead Mount

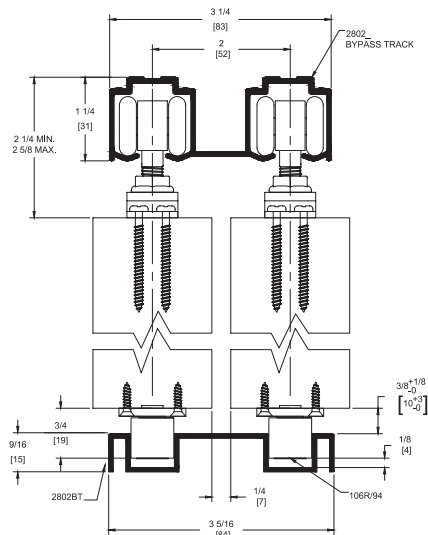

* Side Wall mounting: use one (1) 2812KIT at each end of track and 24" on center

Configurations:

- For Bypass Doors

Features:

- Fits 1 $\frac{3}{8}$ " and 1 $\frac{3}{4}$ " doors
- Hanger body is made of nickel plated zinc alloy for durability and long life
- Steel ball bearing wheels coated in nylon for smooth operation
- 200 lb. panel capacity
- Load capacity 200 lbs. per door panel (2 hangers)
- Extruded aluminum track
- Optional Soft Close
- 5 year warranty
- Meets ADA push force requirements

HBP200A Kits Include:

- 1 ea **2802C** Clear Anodized Aluminum Track
- 4 ea **H222R1** Hangers
- 2 ea **102N** White Nylon Mortise Guide
- 4 ea **TELS-14KIT** In Track Stops
- 1 ea Adjusting Wrench and Mounting Hardware

Standard Kit Sizes		
PART NUMBER	TRACK LENGTH	DOOR WIDTH
HBP200A/4	48"	2 @ 26" Min*
HBP200A/5'4	64"	2 @ 34" Min*
HBP200A/6	72"	2 @ 38" Min*
HBP200A/7	84"	2 @ 44" Min*
HBP200A/8	96"	2 @ 50" Min*
HBP200A/10	120"	2 @ 62" Min*
HBP200A/12	144"	2 @ 74" Min*

*Minimum door overlap is 2".

Options:

- | | |
|--------------------------|--|
| Hardware Kit | H200PACK |
| Mounting Bracket | 2812KIT |
| Track | 2802D dark bronze anodized track |
| Track Stop (bumper) | 287R1-KIT |
| Bottom Channel | 94A |
| Fascia, Snap-On | F134C clear anodized aluminum fascia. |
| | F134D dark bronze anodized aluminum fascia |
| Roller Guide | 106R/94 |
| Dual Guide Channel | 2802BT |
| Polypropylene Guide Rail | EPD3BL for use with 102N |
| Bottom guide | 138N-SG1KIT Surface mounted bottom guide for 1 3/8" door panels |
| | 138N-SG2KIT Surface mounted bottom guide for 1 3/8" bypassing door panels |

Soft Close available. See pages 256-258 for more information.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
A (Mill Finish Aluminum) C (Clear Anodized) D (Dark Bronze Anodized)

PEM KO
ASSA ABLOY


Experience a safer
and more open world

SIM200A SERIES


For Sliding Doors up to 48" wide and 200 lbs.

Manufactured by P.C. Henderson

Side Wall Mount

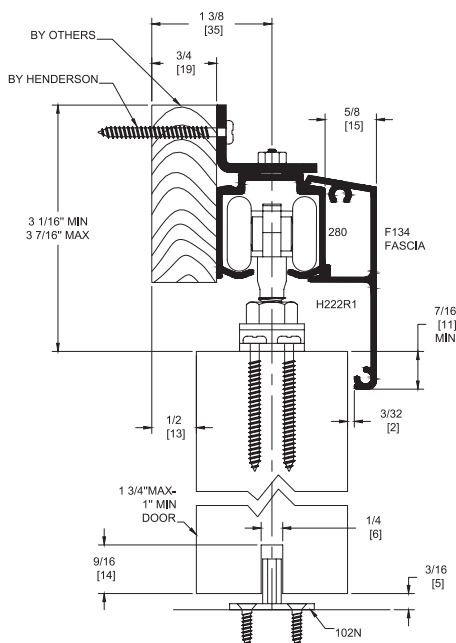

Overhead Mount

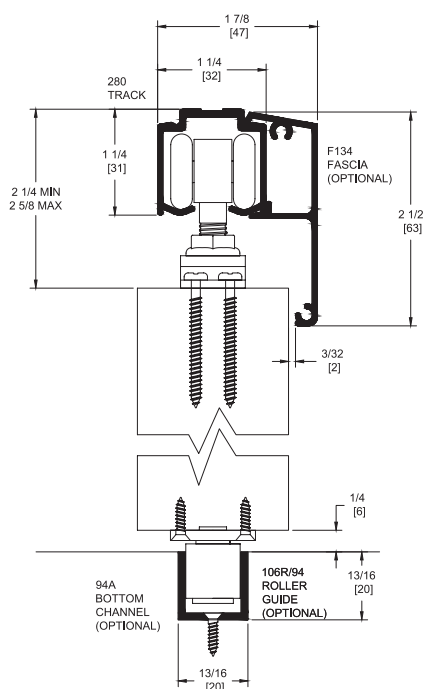

Simultaneous Action Unit (SIM) allows the simultaneous operation of two doors.

Configurations:

- Bi-parting

Installations:

- Overhead Mount
- Side Wall Mount

Features:

- Allows individual bi-part doors to act as a single operating unit. When one door is opened or closed, the second door operates simultaneously
- 200 lb. panel capacity
- Hanger body is made of nickel plated zinc alloy for durability and long life
- Steel ball bearing wheels coated in nylon for smooth operation
- Clear anodized aluminum track 280C
- 2 year warranty

SIM200A Kits Include:

- 1 ea **280C** Clear Anodized Aluminum Track
- 4 ea **H222R1** Hangers
- 4 ea **601H** Nylon In-Track Clip Stop
- 2 ea **102N** White Nylon Mortise Guide
- 1 ea **SIM100** Cable and Pulley Kit

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
SIM200A/6	Aluminum	72"	2 @ 18"
SIM200A/8	Aluminum	96"	2 @ 24"
SIM200A/12	Aluminum	144"	2 @ 36"
SIM200A/16	Aluminum	2 @ 96"	2 @ 48"

Options:

Fascia

F134C clear anodized aluminum fascia
F134D dark bronze anodized fascia
280D dark bronze anodized

Side Wall Track Brackets

PC2815 available as 5 pack only,
PC2815 pack of 5 281 zinc plated side wall bracket.

NOTE: Need one at each end and no more than 2 feet in-between. Fasteners included.

End Plates

K134EP (use with F134C only)

Bottom Channel

94A

Roller Guide

106R/94

Side Wall Mortise Guides

102WN (nylon) and **102WA** (steel)

Polypropylene Guide Rail

EPD3BL for use with 102N or 102WN

Bottom guide

138N-SG1KIT Surface mounted bottom guide for 1 3/8" door panels

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.


PEMKO
ASSA ABLOY

Experience a safer
and more open world

LP200 SERIES

For Sliding Panels up to 200 lbs.

Manufactured by P.C. Henderson

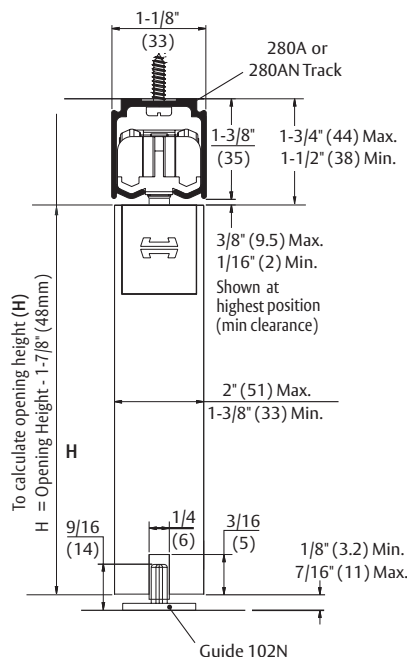

Low profile design for use where space is limited.

Configurations:

- Single
- Bi-parting

Installations:

- Overhead Mount
- Side Wall Mount

Features:

- Used to maximize door height
- Designed to give a modern clean finish with all parts concealed. Ideal for applications where minimal clearance between track and door is required
- Easy installation and adjustment
- 200 lb. panel capacity
- Needle bearing nylon wheels for smooth operation
- Clear anodized aluminum track 280C
- 2 year warranty
- Meets ADA push force requirements

LP200A Kits Include:

- 1 ea **280C** Clear Anodized Aluminum Track
- 1 ea **LH100** Hardware Kit

LH100 Hardware Kits Include:

- 2 ea Low Head Room Units
- 2 ea End Caps
- 2 ea In-Track Clip Stops
- 1 ea Screw Pack
- 2 ea Low Head Room Hangers
- 1 ea **102N** White Nylon Mortise Guide
- 1 ea Small Spanner and 4mm Allen Key

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
LP200A/6	Aluminum	72"	36"
LP200A/8	Aluminum	96"	48"
LP200A/10	Aluminum	120"	60"

Options:

Side Wall Track Bracket **PC2815** available as 5 pack only, **PC2815** pack of 5 281 zinc plated side wall bracket
NOTE: Need one at each end and no more than 2 feet in-between. Fasteners included.

Bottom Channel

Roller Guide

Bottom guide

94A

106R/94

138N-SG1KIT Surface mounted bottom guide for 1 3/8" door panels


PEMKO
ASSA ABLOY

Experience a safer
and more open world

800-824-3018 | www.pemko.com
Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

LBP75A LIGHTWEIGHT SLIDING SYSTEM

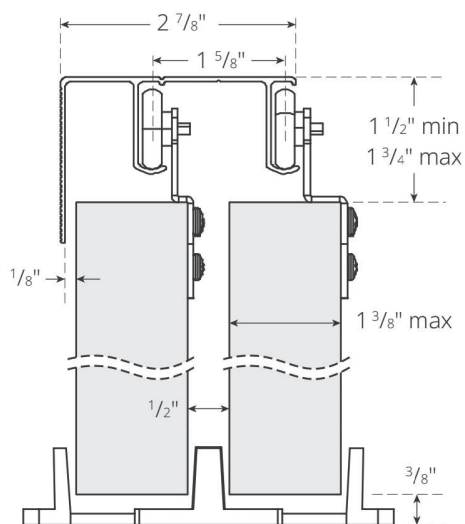

Configuration:

- By-passing

Installation:

- Overhead Mount

Features:

- Hanger body made of plated zinc alloy for durability and long life
- Fiberglass reinforced nylon wheels with sealed, zinc-plated bearings
- 75 lb. per panel capacity
- Meets ADA push and pull force requirements
- Aluminum track with built-in fascia
- Adjustable, modular nylon bottom guide accommodates doors up to 1-3/8" thick
- 5 yr warranty

LBP75A Kits Include:

- 1ea Aluminum Track with Fascia
- 4ea Hangers
- 1ea Floor Guide
- 1ea Door Stop
- 2ea Door pull

*For configurations with more than 2 doors, purchase of additional kits (LBP75PACK) is required.

Standard Kit Sizes		
PART NUMBER	TRACK LENGTH	DOOR WIDTH
LBP75A/4	48"	2 @ 25" MIN**
LBP75A/5	60"	2 @ 31" MIN**
LBP75A/6	72"	2 @ 37" MIN**
LBP75A/8	96"	2 @ 49" MIN**

**Minimum door overlap is 2"

Options:

- Hardware Kit (one door)
- Polypropylene Guide Rail
- Bottom Guide


LBP75PACK

- EPD3BL** for use with 102N
- 102N** – Mortise Guide

SIROCCO SERIES

For Sliding Panels up to 176 lbs.

Manufactured by P.C. Henderson

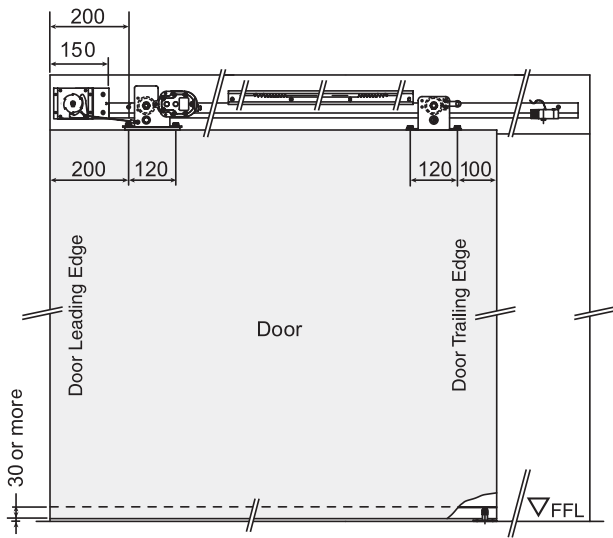

Right Hand SIRRH Shown Above and Below

The Sirocco system is a quiet, user friendly, self closing system which brings the door gently to a close. The integrated hydraulic soft stop brings the door to a safe and cushioned close making it ideal for disabled access systems or public areas. The internal door brake can also be adjusted to allow the user to dictate the speed of opening preventing damage to the door and system.

Configurations:

- Single

Installations:

- Side Wall Mount

Features:

- Self closing system for a single door from 31½" to 47¼" wide and up to 176 lbs.
- Interior applications only
- Comes complete with a hydraulically controlled soft close feature
- Adjustable closing speed
- Door brake to reduce opening speed to prevent damage to the door and system
- Optional hold open unit giving adjustable time delay before self closing
- Operational between temperature ranges of 50 to 104 degrees Fahrenheit
- 2 year warranty
- Meets ADA push force requirements

Sirocco Series Kits Include:

- 1 ea Track 86.61" long
- 1 ea Leading hanger
- 1 ea Trailing hanger
- 1 ea Hydraulic Control Unit
- 1 ea Closing brake rack
- 1 ea Opening brake rack
- 1 ea Power spring mounting bracket
- 7 ea Height adjustment plates
- 1 ea Power spring unit
- 1 ea Guide roller
- 1 ea Opening door stop
- 1 ea Door stop roller
- 1 ea Closing door stop
- 2 ea Wooden door plate (and all required screws and bolts)

Standard Kits	
PART NUMBER	DESCRIPTION
SIRRH	Right Hand Opening Kit
SIRLH	Left Hand Opening Kit



Experience a safer
and more open world


800-824-3018 | www.pemko.com
Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

H440A-OH SERIES

For Sliding Panels up to 440 lbs.

Manufactured by P.C. Henderson

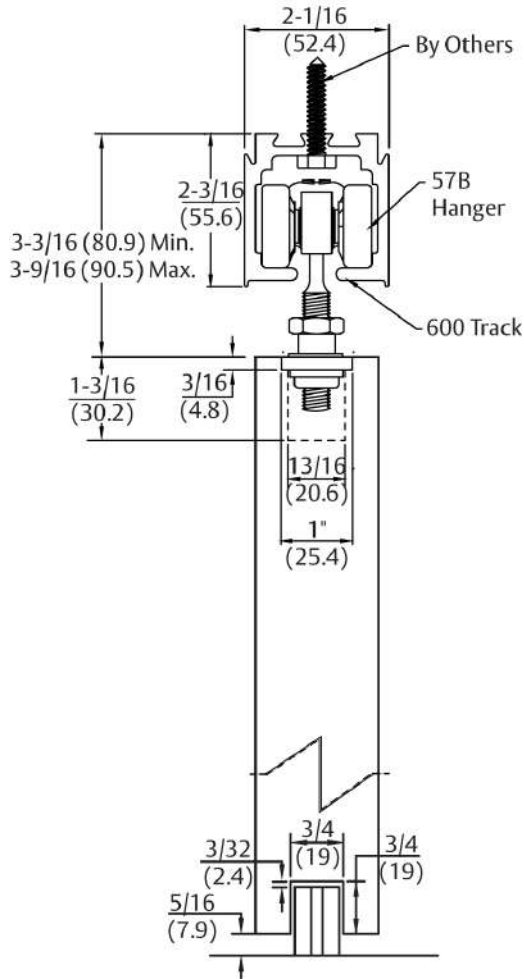

Configurations:

- Single
- Bi-parting

Installations:

- Overhead Mount

Features:

- Overhead mount system
- Nylon body and steel ball bearing nylon wheels for smooth operation
- 440 lb. panel capacity
- Mill finished aluminum track 600A
- 2 year warranty
- Meets ADA push force requirements

H440A-OH Kits Include:

- 1 ea **600A** Mill Finished Aluminum Track
- 2 ea **57B** Hangers: Gray Nylon Body, Zinc Coated Steel Pendant Bolt, Steel Ball Bearing Nylon Wheels
- 2 ea **601P** Nylon In-Track Clip Stop
- 1 ea **89/2N** Gray Nylon Mortise Guide

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
H440A-OH/6	Aluminum	72"	36"
H440A-OH/8	Aluminum	96"	48"
H440A-OH/10	Aluminum	120"	60"
H440A-OH/12	Aluminum	144"	72"
H440A-OH/16	Aluminum	192"	96"


Options:

- Bottom Channel **94A**
- Roller Guide **106R/94**
- Mortise Guides **102N**
- Stainless Steel Flush Bolt **FB150SS**
- Stainless Steel Flush Pull **503SF**

H440A-SW SERIES

For Sliding Panels up to 440 lbs.

Manufactured by P.C. Henderson

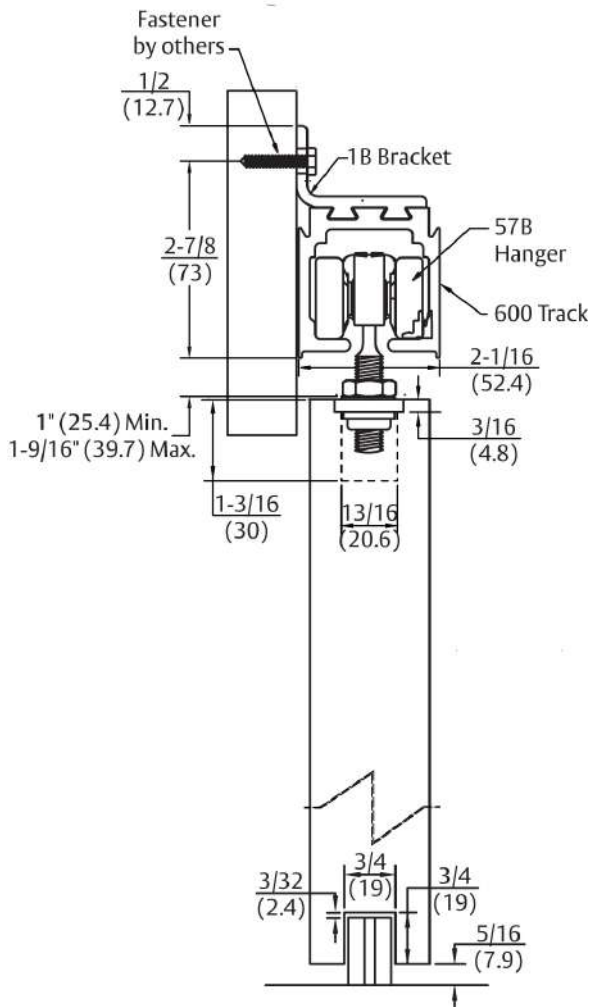

Configurations:

- Single
- Bi-parting

Installations:

- Side Wall Mount

Features:

- Side wall mount system
- Nylon body and steel ball bearing nylon wheels for smooth operation
- 440 lb. panel capacity
- Mill finished aluminum track 600A
- 2 year warranty
- Meets ADA push force requirements

H440A-SW Kits Include:

- 1 ea **600A** Mill Finished Aluminum Track
- **1B** Side Wall Mount Track Brackets (One at each end and no more than 3 feet in between)
- 2 ea **57B** Hangers: Gray Nylon Body, Zinc Coated Steel Pendant Bolt, Steel Ball Bearing Nylon Wheels
- 2 ea **601P** Nylon In-Track Clip Stop
- 1 ea **89/2N** Gray Nylon Mortise Guide

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
H440A-SW/6	Aluminum	72"	36"
H440A-SW/8	Aluminum	96"	48"
H440A-SW/10	Aluminum	120"	60"
H440A-SW/12	Aluminum	144"	72"
H440A-SW/16	Aluminum	192"	96"

Options:

- Bottom Channel **94A**
- Roller Guide **106R/94**
- Mortise Guides **102N**
- Side Wall Mortise Guides **102WN** (nylon) and **102WA** (steel)
- Joining Bracket **1BX**
- Stainless Steel Flush Bolt **FB150SS**
- Stainless Steel Flush Pull **503SF**


PEMKO
ASSA ABLOY

Experience a safer
and more open world

TBS200A-OH SERIES

For Sliding Panels up to 200 lbs.

Manufactured by Pemko Manufacturing

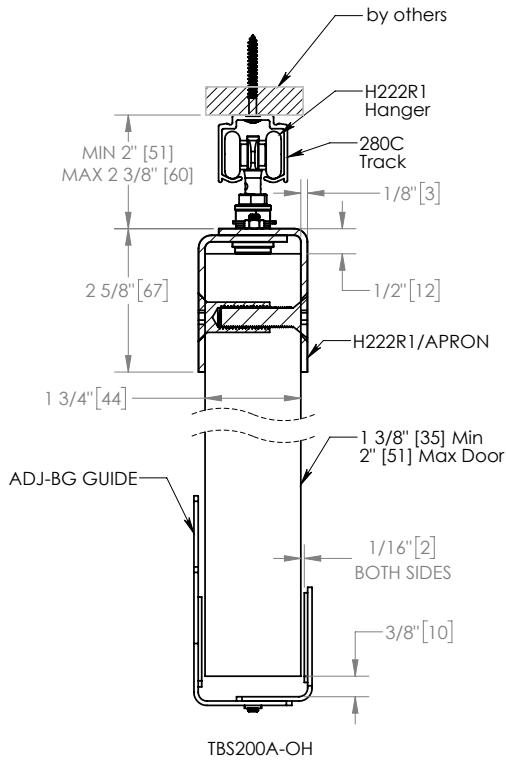

Configurations:

- Single
- Bi-parting

Installations:

- Overhead Mount

Features:

- Overhead mount system
- Nylon body and steel ball bearing nylon wheels for smooth operation
- 200 lb. panel capacity
- Clear anodized aluminum track 280C
- 2 year warranty
- Meets ADA push force requirements

TBS200A-OH Kits Include:


- 1 ea **280C** Clear Anodized Aluminum Track
- 2 ea **H222R1 Hanger** Gray Nylon Body, Zinc Coated Steel Pendant Bolt, Steel Ball Bearing Nylon Wheels
- 2 ea **H222R1/APRON** Mounting Apron Through-Bolted
- 1 ea **ADJ-BG** Surface Type Guide
- 2 ea **TELS-14KIT** Nylon In-Track Clip Stop

Standard Kit Sizes			
PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
TBS200A-OH/6	Aluminum	72"	36"
TBS200A-OH/8	Aluminum	96"	48"
TBS200A-OH/10	Aluminum	120"	60"
TBS200A-OH/12	Aluminum	144"	72"

TBS200A-SW SERIES

For Sliding Panels up to 200 lbs.

Manufactured by Pemko Manufacturing

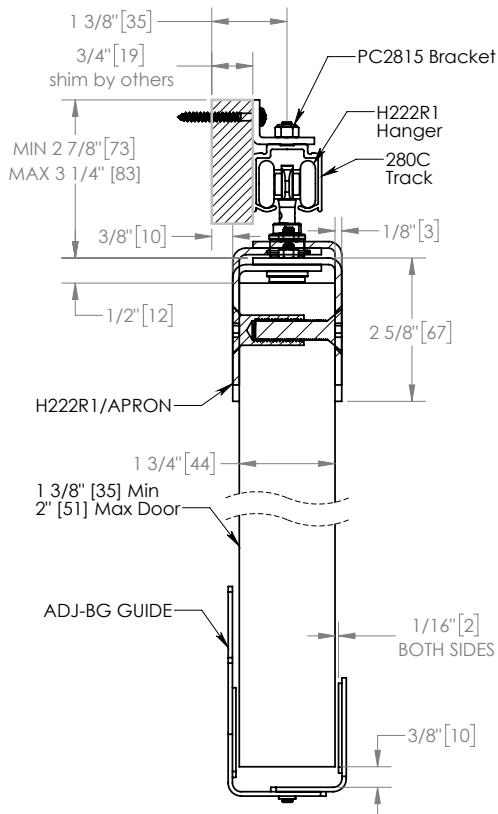

Configurations:

- Single
- Bi-parting

Installations:

- Side Wall Mount

Features:

- Side wall mount system
- Nylon body and steel ball bearing nylon wheels for smooth operation
- 200 lb. panel capacity
- Clear anodized aluminum track 280C
- 2 year warranty
- Meets ADA push force requirements

TBS200A-SW Kits Include:

- 1 ea **200** Clear Anodized Aluminum Track
- **PC2815** Side Wall Mount Track Brackets (One at each end and no more than 3 feet in between)
- 2 ea **H222R1 HANGER** Gray Nylon Body, Zinc Coated Steel Pendant Bolt, Steel Ball Bearing Nylon Wheels
- 2 ea **H222R1/APRON** Mounting Apron Through-Bolted
- 1 ea **ADJ-BG** Surface Type Guide
- 2 ea **TELS-14KIT** Nylon In-Track Clip Stop

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
TBS200A-SW/6	Aluminum	72"	36"
TBS200A-SW/8	Aluminum	96"	48"
TBS200A-SW/10	Aluminum	120"	60"
TBS200A-SW/12	Aluminum	144"	72"

PEMKO
ASSA ABLOY

Experience a safer
and more open world

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

TBS250A-OH SERIES

For Sliding Panels up to 250 lbs.

Manufactured by Pemko Manufacturing

Configurations:

- Single
- Bi-parting

Installations:


- Overhead Mount

Features:

- Overhead mount system
- Nylon body and steel ball bearing nylon wheels for smooth operation
- 250 lb. panel capacity
- Mill finished aluminum track 600A
- 2 year warranty
- Meets ADA push force requirements

TBS250A-OH Kits Include:

- 1 ea **600A** Mill Finished Aluminum Track
- 2 ea **56B** Hangers: Gray Nylon Body, Zinc Coated Steel Pendant Bolt, Steel Ball Bearing Nylon Wheels
- 2 ea **53B/APRON** Mounting Brackets Thru-Bolted
- 1 ea **ADJ-BG** Surface Type Guide
- 2 ea **601P** Nylon In-Track Clip Stop

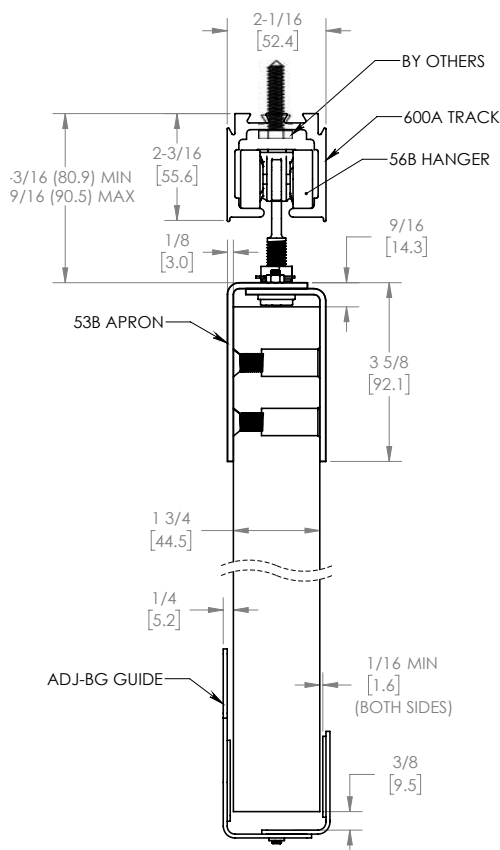

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
TBS250A-OH/6	Aluminum	72"	36"
TBS250A-OH/8	Aluminum	96"	48"
TBS250A-OH/10	Aluminum	120"	60"
TBS250A-OH/12	Aluminum	144"	72"
TBS250A-OH/16	Aluminum	192"	96"

TBS250A-SW SERIES

For Sliding Panels up to 250 lbs.

Manufactured by Pemko Manufacturing

Configurations:


- Single
- Bi-parting

Installations:

- Side Wall Mount

Features:

- Side wall mount system
- Nylon body and steel ball bearing nylon wheels for smooth operation
- 250 lb. panel capacity
- Mill finished aluminum track 600A
- 2 year warranty
- Meets ADA push force requirements

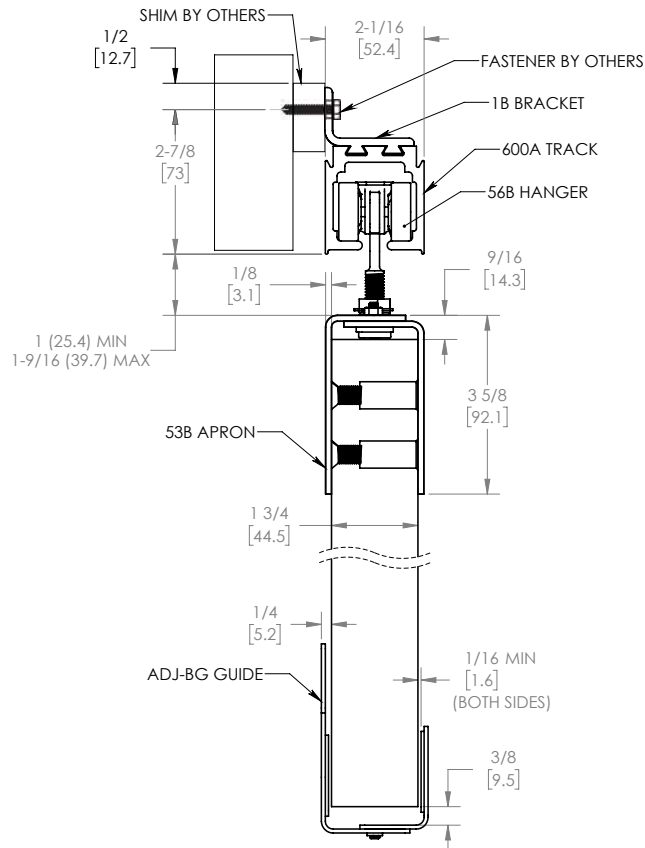

TBS250A-SW Kits Include:

- 1 ea **600A** Mill Finished Aluminum Track
- **1B** Side Wall Mount Track Brackets
(One at each end and no more than 3 feet in between)
- 2 ea **56B** Hangers: Gray Nylon Body, Zinc Coated Steel Pendant Bolt, Steel Ball Bearing Nylon Wheels
- 2 ea **53B/APRON** Mounting Brackets Thru-Bolted
- 1 ea **ADJ-BG** Surface Type Guide
- 2 ea **601P** Nylon In-Track Clip Stop

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
TBS250A-SW/6	Aluminum	72"	36"
TBS250A-SW/8	Aluminum	96"	48"
TBS250A-SW/10	Aluminum	120"	60"
TBS250A-SW/12	Aluminum	144"	72"
TBS250A-SW/16	Aluminum	192"	96"

PEMKO
ASSA ABLOY

Experience a safer
and more open world

800-824-3018 | www.pemko.com


Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

H600S-OH SERIES

For Sliding Panels up to 600 lbs.

Manufactured by P.C. Henderson

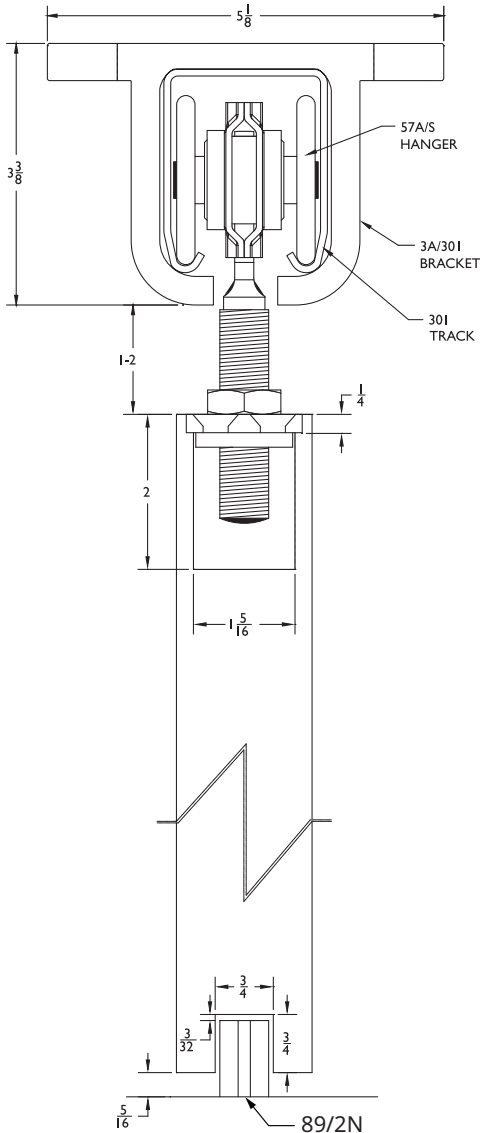

Configurations:

- Single
- Bi-parting

Installations:

- Overhead Mount

Features:

- Overhead mount system
- Heavy duty zinc coated steel
- Ball bearing wheels
- 600 lb. panel capacity
- Galvanized steel track 301
- 2 year warranty

H600S-OH Kits Include:

- 1 ea **301** Galvanized Steel Track
- **3A/301** Aluminum Alloy Overhead Mount Track Brackets
(One at each end and no more than three feet in between)
- 2 ea **1A/301/EC** Aluminum Alloy End Caps
- 2 ea **57A/S** Zinc Coated Steel Body, Wheels, and Pendant Bolt Hangers
- 2 ea **HH3/301** Galvanized Steel In-Track Stops
- 1 ea **89/2N** Gray Nylon Mortise Guide

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
H600S-OH/8	Steel	96"	48"
H600S-OH/10	Steel	120"	60"
H600S-OH/12	Steel	144"	72"


Options:

- Bottom Channel **94A**
- Roller Guide **106R/94**
- Mortise Guides **102N**
- Joining Bracket **3AX/301**
- Stainless Steel Flush Bolt **FB150SS**
- Stainless Steel Flush Pull **503SF**

H600S-SW SERIES

For Sliding Panels up to 600 lbs.

Manufactured by P.C. Henderson

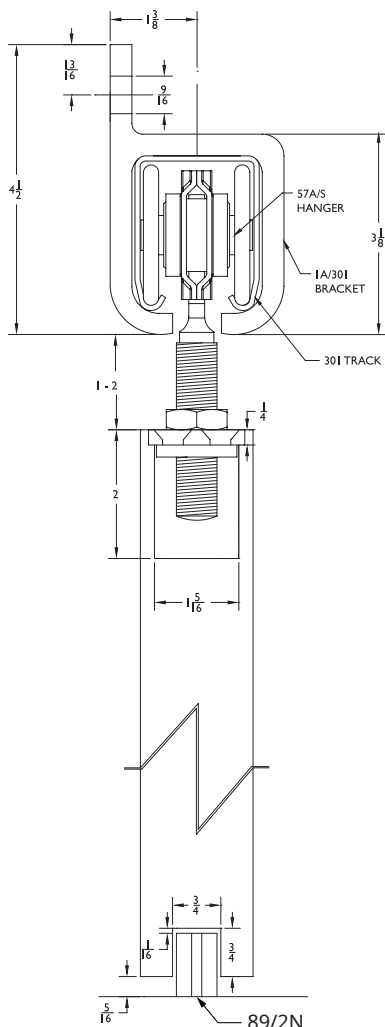

Configurations:

- Single
- Bi-parting

Installations:

- Side Wall Mount

Features:

- Side wall mount system
- Heavy duty zinc coated steel
- Ball bearing wheels
- 600 lb. panel capacity
- Galvanized steel track 301
- 2 year warranty

H600S-SW Kits Include:

- 1 ea **301** Galvanized Steel Track
- **1A/301** Side Wall Mount Track Brackets
(One at each end and no more than three feet in between)
- 2 ea **1A/301/EC** Aluminum Alloy End Caps
- 2 ea **57A/S** Zinc Coated Steel Body, Wheels, and Pendant Bolt Hangers
- 2 ea **HH3/301** Galvanized Steel In-Track Stops
- 1 ea **89/2N** Gray Nylon Mortise Guide

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
H600S-SW/8	Steel	96"	48"
H600S-SW/12	Steel	144"	72"

Options:


Bottom Channel	94A
Roller Guide	106R/94
Mortise Guides	102N
Side Wall Mortise Guides	102WN
Joining Bracket	1AX/301
Stainless Steel Flush Bolt	FB150SS
Stainless Steel Flush Pull	503SF

PEMCO
ASSA ABLOY

Experience a safer
and more open world

H800S-OH SERIES

For Sliding Panels up to 800 lbs.
Manufactured by P.C. Henderson

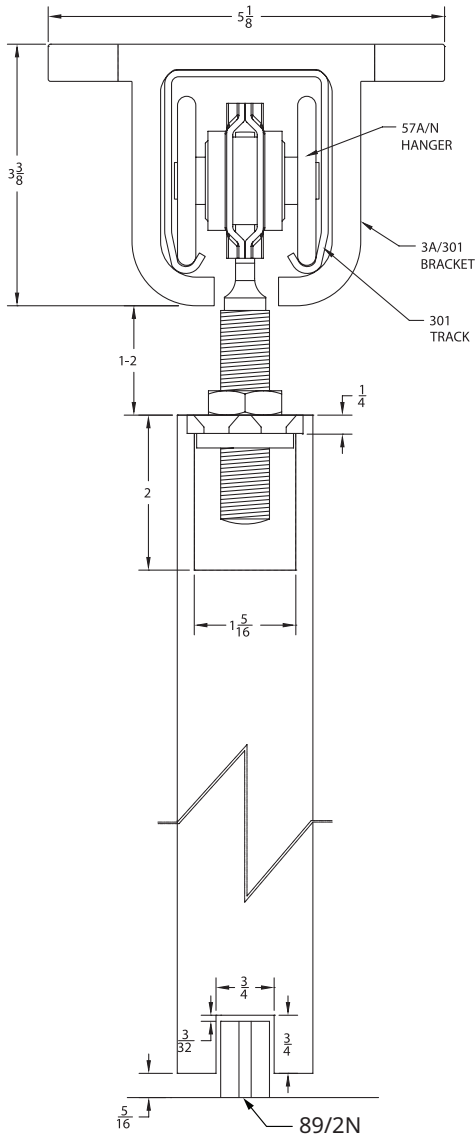

Configurations:

- Single
- Bi-parting

Installations:

- Overhead Mount

Features:

- Overhead mount system
- Heavy duty zinc coated steel body
- Ball bearing nylon wheels for smooth operation
- 800 lb. panel capacity
- Galvanized steel track 301
- 2 year warranty

H800S-OH Kits Include:

- 1 ea **301** Galvanized Steel Track
- **3A/301** Overhead Mount Track Brackets (One at each end and no more than three feet in between)
- 2 ea **1A/301/EC** Aluminum Alloy End Caps
- 2 ea **57A/N** Zinc Coated Steel Body, Nylon Wheels, and Pendant Bolt Hangers
- 2 ea **HH3/301** Galvanized Steel In-Track Stop
- 1 ea **89/2N** Gray Nylon Mortise Guide

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
H800S-OH/8	Steel	96"	48"
H800S-OH/10	Steel	120"	60"


Options:

- Bottom Channel **94A**
- Roller Guide **106R/94**
- Mortise Guides **102N**
- Joining Bracket **3AX/301**
- Stainless Steel Flush Bolt **FB150SS**
- Stainless Steel Flush Pull **503SF**

H800S-SW SERIES

For Sliding Panels up to 800 lbs.

Manufactured by P.C. Henderson

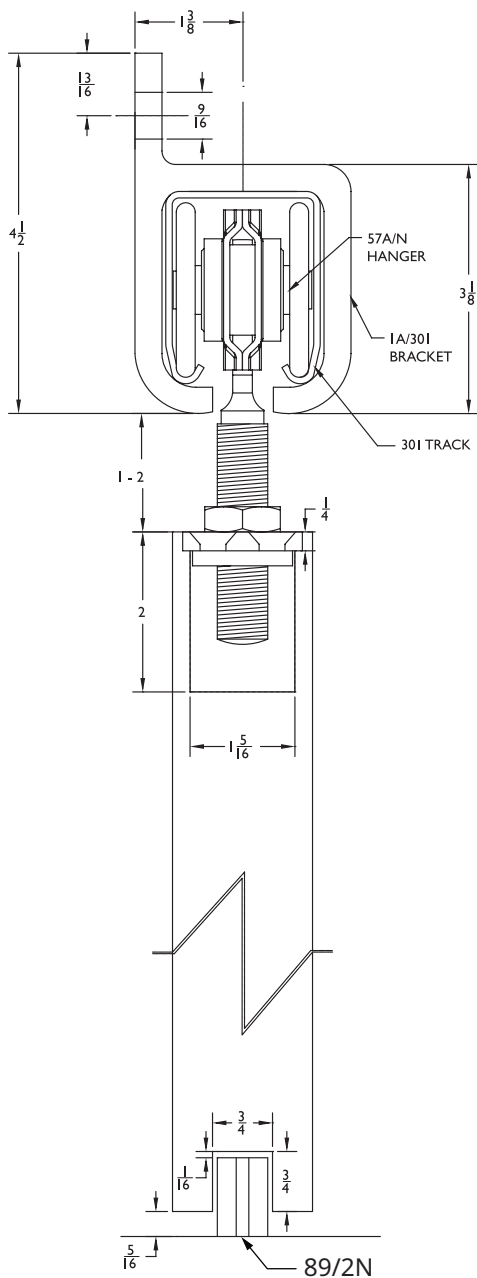

Configurations:

- Single
- Bi-parting

Installations:

- Side Wall Mount

Features:

- Side wall mount system
- Heavy duty zinc coated steel body
- Heavy ball bearing nylon wheels for smooth operation
- 800 lb. panel capacity
- Galvanized steel track 301
- 2 year warranty

H800S-SW Kits Include:

- 1 ea **301** Galvanized Steel Track
- **1A/301** Aluminum Alloy Side Wall Mount Track Brackets (One at each end and no more than three feet in between)
- 2 ea **1A/301/EC** Aluminum Alloy End Caps
- 2 ea **57A/N** Zinc Coated Steel Body, Nylon Wheels, and Pendant Bolt Hangers
- 2 ea **HH3/301** Galvanized Steel In-Track Stops
- 1 ea **89/2N** Gray Nylon Mortise Guide

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
H800S-SW/6	Steel	72"	36"
H800S-SW/10	Steel	120"	60"
H800S-SW/12	Steel	144"	72"

Options:

- Bottom Channel **94A**
- Roller Guide **106R/94**
- Mortise Guides **102N**
- Side Wall Mortise Guides **102WN** (nylon) and **102WA** (steel)
- Joining Bracket **1AX/301**
- Stainless Steel Flush Bolt **FB150SS**
- Stainless Steel Flush Pull **503SF**

PEMKO
ASSA ABLOY

Experience a safer
and more open world

800-824-3018 | www.pemko.com


Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

H1100A-OH SERIES

For Sliding Panels up to 1100 lbs.

Manufactured by P.C. Henderson

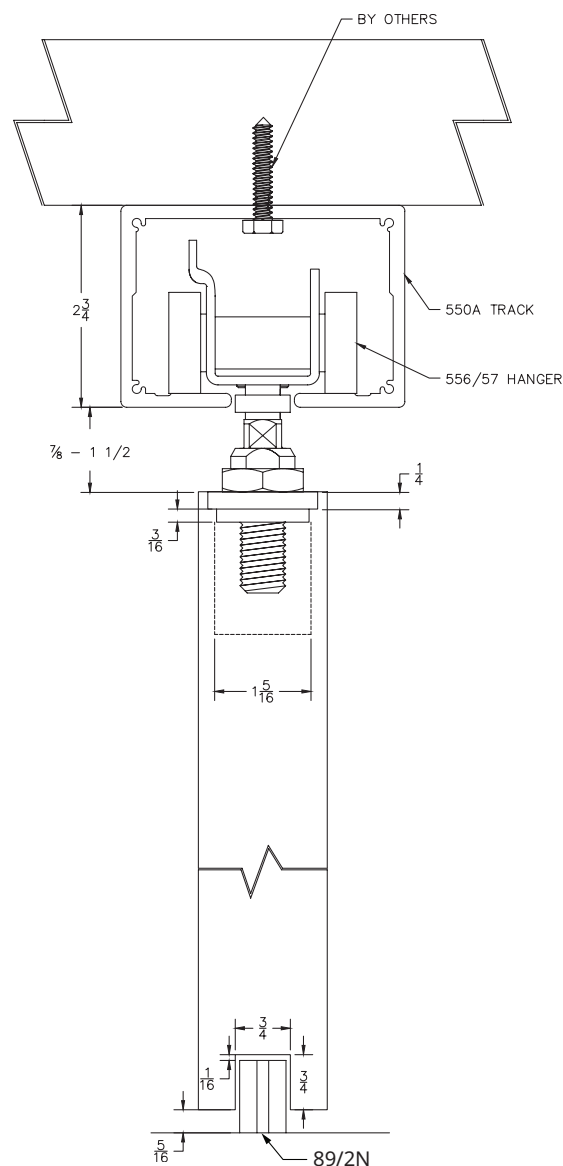

Ideally suited for large doors that require high performance and an attractive finish.

Typical applications are hotels, conference centers, shop-fronts and showrooms.

Configurations:

- Single
- Bi-parting

Installations:

- Overhead Mount

Features:

- For top hung wood and metal doors
- Heavy duty black painted steel body
- Ball bearing steel wheels
- 1100 lb. panel capacity
- Mill finished aluminum track 550A
- 2 year warranty

H1100A-OH Kits Include:

- 1 ea **550A** Mill Finished Aluminum Track
- 2 ea **556/57** Painted Black Steel Body - Zinc Coated Steel Wheels and Pendant Bolt Hangers
- 2 ea **HH3/301** Galvanized Steel In-Track Stops
- 1 ea **89/2N** Gray Nylon Mortise Guide

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
H1100A-OH/6	Aluminum	72"	36"
H1100A-OH/8	Aluminum	96"	48"
H1100A-OH/10	Aluminum	120"	60"
H1100A-OH/12	Aluminum	144"	72"
H1100A-OH/16	Aluminum	197"	98"


Options:

- Bottom Channel **94A**
- Roller Guide **106R/94**
- Stainless Steel Flush Bolt **FB150SS**
- Stainless Steel Flush Pull **503SF**

H1100A-SW SERIES

For Sliding Panels up to 1100 lbs.

Manufactured by P.C. Henderson

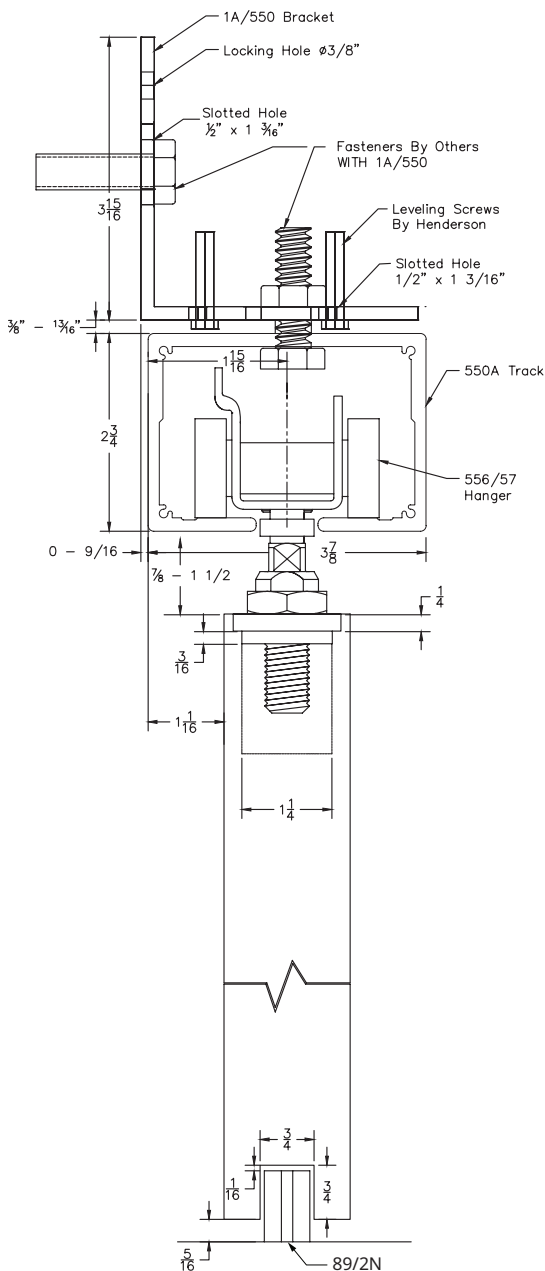

Ideally suited for large doors that require high performance and an attractive finish.

Typical applications are hotels, conference centers, shop-fronts and showrooms.

Configurations:

- Single
- Bi-parting

Installations:

- Side Wall Mount

Features:

- Heavy duty black painted steel body ball bearing wheels
- 1100 lb. panel capacity
- Mill finished aluminum track 550A
- 2 year warranty

H1100A-SW Kits Include:

- 1 ea **550A** Mill Finished Aluminum Track
- **1A/550** Aluminum Alloy Side Wall Track Bracket
Fastners not included with 1A/550. (One at each end and no more than three feet in between)
- 2 ea **556/57** Painted Black Steel Body - Zinc Coated Steel Wheels and Pendant Bolt Hangers
- 2 ea **HH3/301** Galvanized Steel In-Track Stops
- 1 ea **89/2N** Gray Nylon Mortise Guide

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
H1100A-SW/6	Aluminum	72"	36"
H1100A-SW/8	Aluminum	96"	48"
H1100A-SW/10	Aluminum	120"	60"
H1100A-SW/12	Aluminum	144"	72"
H1100A-SW/16	Aluminum	197"	98"

Options:

- Bottom Channel **94A**
- Roller Guide **106R/94**
- Stainless Steel Flush Bolt **FB150SS**
- Stainless Steel Flush Pull **503SF**

PEMCO
ASSA ABLOY

Experience a safer
and more open world


800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

POCKET FRAME KIT

For Sliding Panels up to 200 lbs.

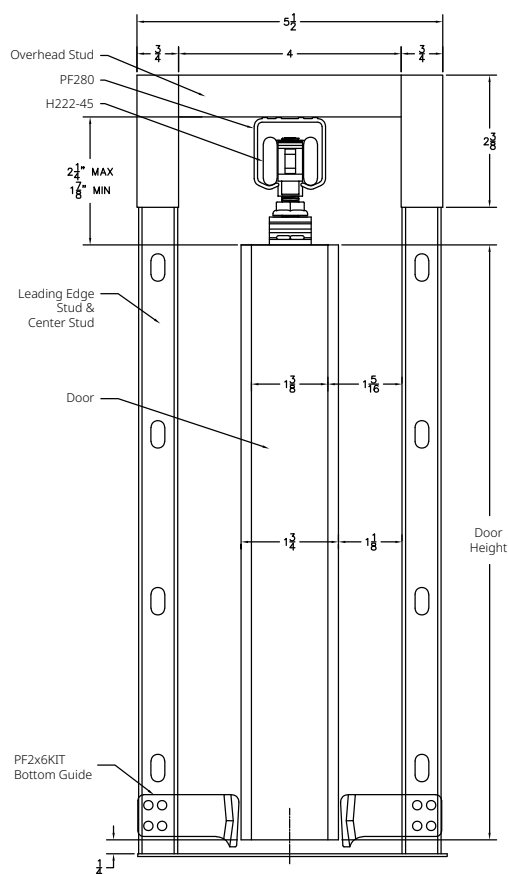

NOTE: $\frac{3}{4}$ " plywood can be installed to the studs in the pocket to add strength and rigidity to pocket door walls.

Rough Frame Opening Dimensions:
2 x Door Width + 1" and Door Height + 5"

Features:

- Heavy duty hardware supports doors upto 200 lbs.
- Available soft-close option for doors up to 200 lbs
- Standard kit is for 1 3/8" and 1 3/4" doors
- For standard 3 1/2", 5 1/2" wood studs and 6" metal studs
- Chrome plated steel hangers are corrosion resistant and no maintenance is required
- Service-friendly design
- 5 year warranty
- Meets ADA push force requirements
- Certified to ANSI/BHMA A156.14

Pocket Frame Kit Includes:

- 1 ea Header Track Assembly
- 4 ea **PFSS**_ Galvanized Steel Studs
- 2 ea **PFHB-1** and **PFHB-2** Pre-Mounted Header Brackets
- 2 ea **H222R1** Hangers
- 2 ea **PFFC-SS**_ Floor Cleats
- 1 ea **PFBS** Pocket Frame Bumper Stop
- 2 ea **Bottom Guide**
 - PFBG-8** Bottom Guide for 1 3/8" doors
 - PFBG-4** Bottom Guide for 1 3/4" doors
 - PF2x6KIT** Pocket Frame Bottom Guide for 2x6 and SP6 kit

Standard Kit Sizes

2x4 Wood or Metal Stud Constructed Walls	2x6 Wood Stud Constructed Walls	2x6 Metal Stud Constructed Walls	Net Door Size/s (The Kits can be trimmed in field)
PF28200A7280	PF28200A7280-2X6	PF28200A7280-SP6	2'6" x 6'8" - 3'0" x 6'8"
PF28200A7284	PF28200A7284-2X6	PF28200A7284-SP6	2'6" x 7'0" - 3'0" x 7'0"
PF28200A9684	PF28200A9684-2X6	PF28200A9684-SP6	4'0" x 7'0"
PF28200A7296	PF28200A7296-2X6	PF28200A7296-SP6	2'6" x 8'0" - 3'0" x 8'0"
PF28200A9696	PF28200A9696-2X6	PF28200A9696-SP6	4'0" x 8'0"

Options:

PFCDKIT

- Conversion Kit to achieve a bipart double door frame

PFKIT

- Replacement Hardware Kit for Pemko Pocket Frame Kit for 1 3/8" and 1 3/4" thick doors. (Each contains 2-H222R1 Hangers, 1-PFBS Bumper Stop, 1-BG-4 Guide, 1-BG-8 Guide)

PF-SP6-KIT

- Adapter kit for 2x6 Metal Stud constructed walls. Included with all 2x6 and SP6 kits. (Each contains 6 shims for header assembly, 3 PFFC-SS-SP6 floor cleats)

Soft Close available. See pages 256-258 for more information.

PEMKO
ASSA ABLOY

Experience a safer
and more open world

800-824-3018 | www.pemko.com


Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

FOLDING 100 SERIES

**For Folding Doors up to 100 lbs.
For Doors up to 24" Wide x 96" Tall**
Manufactured by P.C. Henderson

280C Overhead Mounted

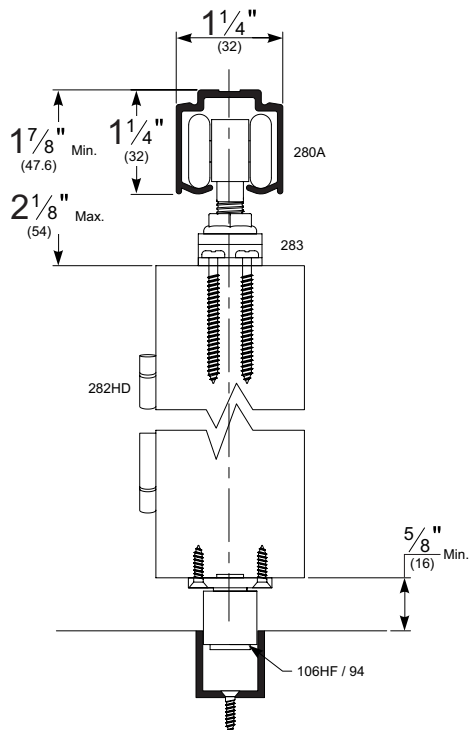

Features:

- For medium weight folding doors
- Two and four leaf kits are available
- 2 year warranty

Two Panel:

HF2/100A Kits Include:

- 1 ea **280C** Clear Anodized Track
- 1 ea **283** Hanger
- 1 ea **289T** Top Pivot
- 1 ea **289B** Bottom Pivot
- 3 ea **282HD26** Hinges
- 1 ea **106HF/94** Roller Guide
- 1 ea **94A** Aluminum Guide Channel
- 1 ea Adjusting Wrench and Mounting Hardware

Four Panel:

HF4/100A Kits Include:

- 1 ea **280C** Clear Anodized Track
- 2 ea **283** Hangers
- 2 ea **289T** Top Pivots
- 2 ea **289B** Bottom Pivots
- 6 ea **282HD26** Hinges
- 2 ea **106HF/94** Roller Guide
- 1 ea **94A** Aluminum Guide Channel
- 1 ea Adjusting Wrench and Mounting Hardware

Standard Kit Sizes

PART NUMBER	MATERIAL	# OF PANELS	TRACK LENGTH
HF2/100A/2	Aluminum	2	24"
HF2/100A/2'6	Aluminum	2	30"
HF2/100A/3	Aluminum	2	36"
HF2/100A/4	Aluminum	2	48"
HF4/100A/4	Aluminum	4	48"
HF4/100A/5	Aluminum	4	60"
HF4/100A/6	Aluminum	4	72"
HF4/100A/8	Aluminum	4	96"

Options:

Mounting Bracket

PC2815 available as 5 pack only, **PC2815** pack of 5 281 zinc plated side wall bracket.
NOTE: Need one at each end and no more than 2 feet in-between. Fasteners included.

Track

280D dark bronze anodized aluminum

Note: Allow 1/4" clearance at pivot jambs and 1/8" in between hinged doors if hinges are mortised. Allow 3/16" between hinged doors if hinges are surface mounted. Allow 1/8" between doors meeting in the center of the opening on HF4 kits and allow 1/8" between wall and end panel on HF2 kits.

PEMKO
ASSA ABLOY


Experience a safer
and more open world

PACER INTERIOR END FOLD SERIES

For Folding Doors and Room Dividers up to 165 lbs.

For Doors up to 36" Wide x 106" Tall

Manufactured by P.C. Henderson

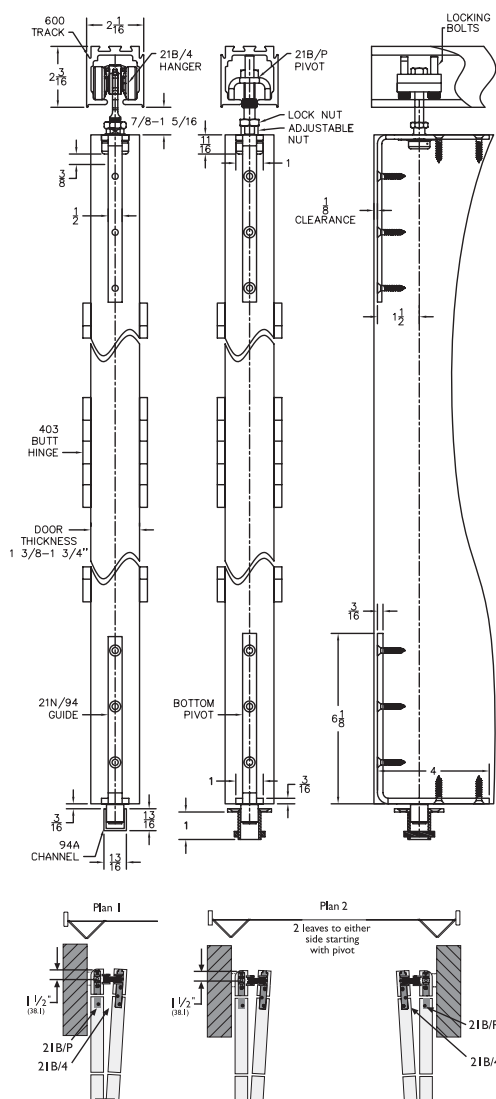

Features:

- For top-hung, medium weight, interior, partition doors
- Ideal in both residential and commercial applications requiring end folding doors
- 2 year warranty

Two Panel: plan 1

PIF2/165A Kits Include:

- 1 ea **600A** Mill Finished Aluminum Track
- 1 ea **21B/P** Top and Bottom Pivot Assembly
- 1 ea **21B/4** Nylon Body and Wheels, Zinc Coated Steel Pendant Bolt and Door Bracket Hanger
- 1 ea **21N/94** Nylon Roller Guide on Zinc Coated Steel Door Bracket Bottom Guide
- 4 ea **403/2** Aluminum Alloy Butt Hinges
- 1 ea **94A** Aluminum Guide Channel

Four Panel: plan 2

PIF4/165A Kits Include:

- 1 ea **600A** Mill Finished Aluminum Track
- 2 ea **21B/P** Top and Bottom Pivot Assembly
- 2 ea **21B/4** Nylon Body and Wheels, Zinc coated steel Pendant Bolt and Door Bracket Hanger
- 2 ea **21N/94** Nylon Roller Guide on Zinc Coated Steel Door Bracket Bottom Guide
- 8 ea **403/2** Aluminum Alloy Butt Hinges
- 1 ea **94A** Aluminum Guide Channel

Standard Kit Sizes

PART NUMBER	MATERIAL	# OF PANELS	TRACK LENGTH
PIF2/165A/6	Aluminum	2	72"
PIF4/165A/6	Aluminum	4	72"
PIF4/165A/8	Aluminum	4	96"
PIF4/165A/12	Aluminum	4	2 @ 72"

Options:

Stainless Steel Flush Bolt **FB150SS**

Stainless Steel Flush Pull **503SF**

NOTE: Allow $\frac{3}{8}$ " clearance at pivot jambs and $\frac{1}{8}$ " in between hinged doors if hinges are mortised. Allow $\frac{7}{16}$ " between hinged doors if hinges are surface mounted. Allow $\frac{1}{8}$ " between doors meeting in the center of the opening on PIF4 kits and allow $\frac{1}{8}$ " between wall and end panel on PIF2 kits.

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY

Experience a safer
and more open world


HIDDEN SLIDING DOOR SYSTEM

Hide Slide™ Series for Wood Doors

For Sliding Panels up to 176 lbs.






Wall to Door Clearances

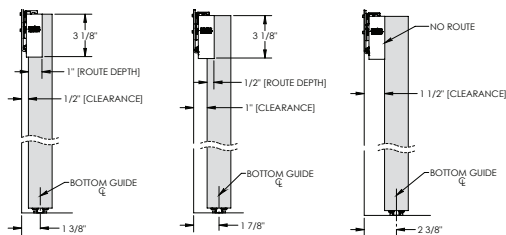

Note: Depth of top route determines clearance between wall and door.

Overlap Configurations

Note: Please refer to the ordering guide for the exact door size needed.

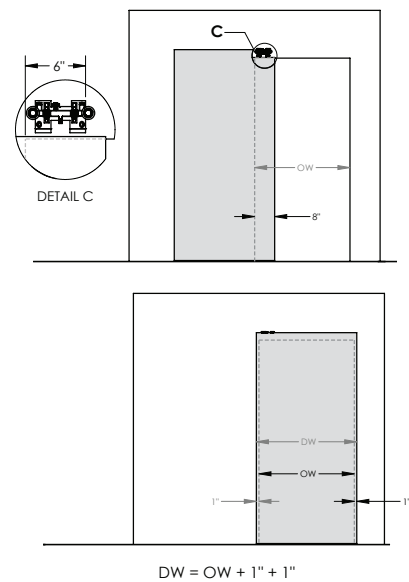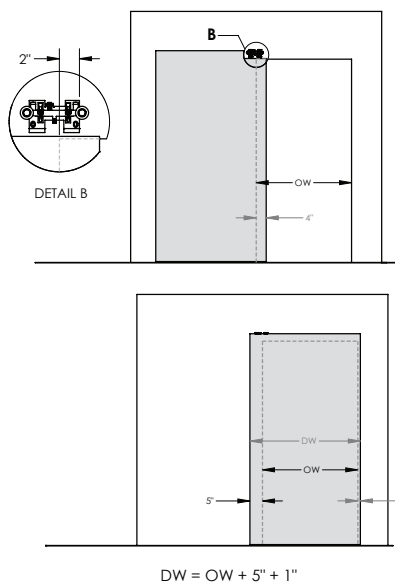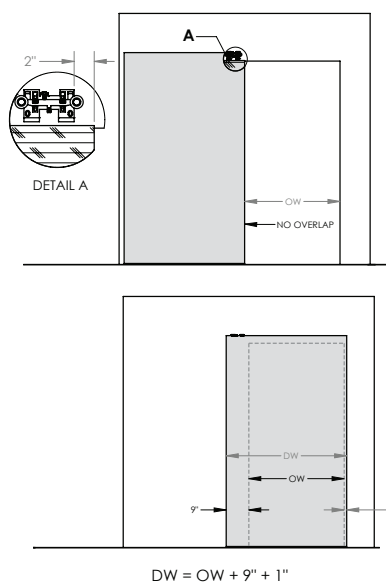

Configurations:

- Single
- Bi-parting

Installations:

- Side Wall Mount

Features:

- Soft open and close
- Nylon wheels with steel ball bearings for smooth operation
- 176 lb. panel capacity
- Tested to ANSI/BHMA A156.14
- 5 year warranty

Hide Slide Kits Include:

1 ea	Aluminum Track	1 ea	Adjustable Top Roller
2 ea	Soft Close Devices	1 ea	Safety Cable
2 ea	Backup Hard Stops	2 ea	Bottom Rollers
2 ea	Cable Clamps	1 ea	Bottom Guide
2 ea	End Caps	1 ea	Bottom Guide Channel
1 ea	Flush Pull		Insert

(HIDESLIDE/PULL-BSP)

STANDARD KIT SIZE

Part Number	Track Length	Door Width	Opening Width
HIDESLIDE/48	48"	32" - 48"	24" - 46"

Notes: Door width determined by overlap configurations (see images below)
Door height determined using a 3/8" undercut and 3" top overlap

Options:

Flush Pull

503SF (For Rockwood options, [click here](#))

Mill Aluminum
Bottom Track

18/1A use in carpeted applications. Order 2" wide by length with beveled edges. Consider 18/1A height of 1/8" in door height calculations.

Sliding Door Lock

SDL_ / SDL_-ADA

Automatic Door
Slider

PSLIDE (See product page for more details)

PEMKO
ASSA ABLOY

Experience a safer
and more open world

800-824-3018 | www.pemko.com
Check the web site for the up-to-date catalog



Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

FLEXIROL INTERIOR END FOLD SERIES

For Folding Doors and Room Dividers up to 275 lbs.

For Doors up to 48" Wide x 177" Tall

Manufactured by P.C. Henderson

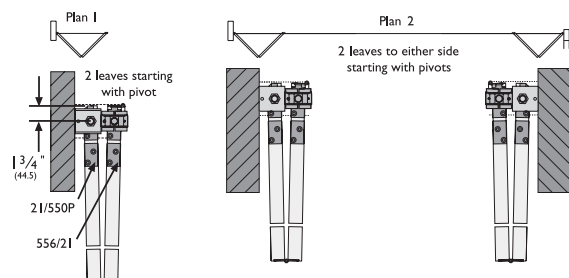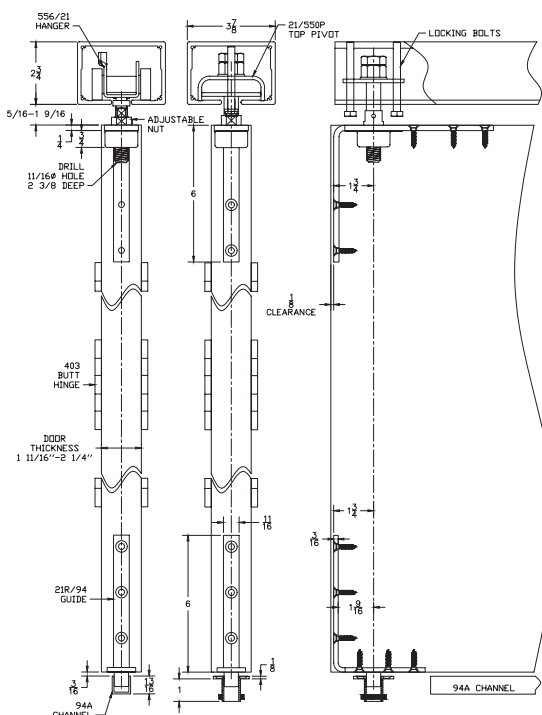

Features:

- For top-hung, heavy weight, interior, partition doors.
- Specifically designed for commercial applications requiring end folding doors
- 2 year warranty.

Two Panel: plan 1

FIF2/275A Kits Include:

- 1 ea **550A** Mill Finished Aluminum Track
- 1 ea **21/550/P** Top and Bottom Pivot Assembly
- 1 ea **556/21** Zinc Coated Steel Wheels, Pendant Bolt, Body, and Door Bracket
- 1 ea **21R/94** Bottom Guide
- 4 ea **403/2** Aluminum Alloy Butt Hinges
- 1 ea **94A** Aluminum Guide Channel

Four Panel: plan 2

FIF4/275A Kits Include:

- 1 ea **550A** Mill Finished Aluminum Track
- 2 ea **21/550/P** Top and Bottom Pivot Assembly
- 2 ea **556/21** Zinc Coated Steel Wheels, Pendant Bolt, Body, and Door Bracket
- 2 ea **21R/94** Bottom Guide
- 8 ea **403/2** Aluminum Alloy Butt Hinges
- 1 ea **94A** Aluminum Guide Channel

Standard Kit Sizes

Part Number	Material	# of Panels	Track Length
FIF2/275A/8	Aluminum	2	96"
FIF4/275A/8	Aluminum	4	96"
FIF4/275A/12	Aluminum	4	2 @ 72"
FIF4/275A/16	Aluminum	4	2 @ 96"

Options:

Stainless Steel Flush Bolt **FB150SS**

Stainless Steel Flush Pull **503SF**

NOTE: Allow $\frac{3}{8}$ " clearance at pivot jambs and $\frac{1}{8}$ " in between hinged doors if hinges are mortised. Allow $\frac{7}{16}$ " between hinged doors if hinges are surface mounted. Allow $\frac{1}{8}$ " between doors meeting in the center of the opening on FIF4 kits and allow $\frac{1}{8}$ " between wall and end panel on FIF2 kits.

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.




PEMKO
ASSA ABLOY

Experience a safer
and more open world

STAINLESS STEEL SLIDING TRACK HARDWARE SYSTEM

W60 SERIES FOR WOOD DOORS

For Sliding Panels up to 176 lbs.
Order Form Required

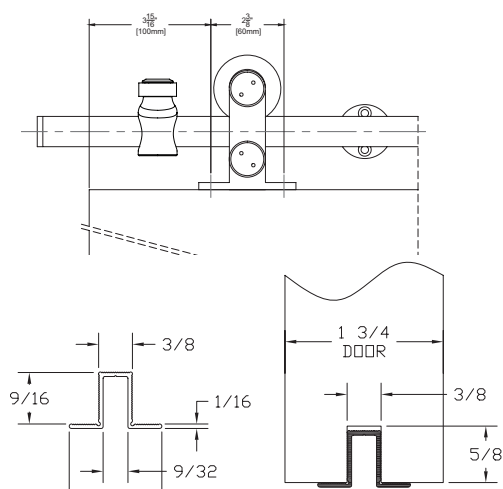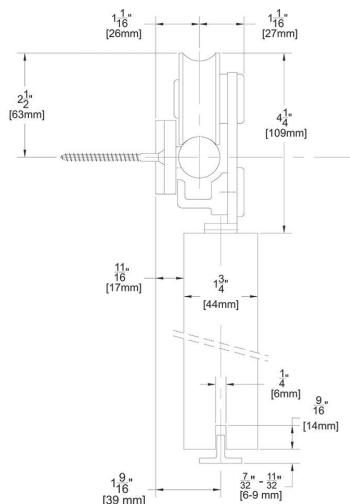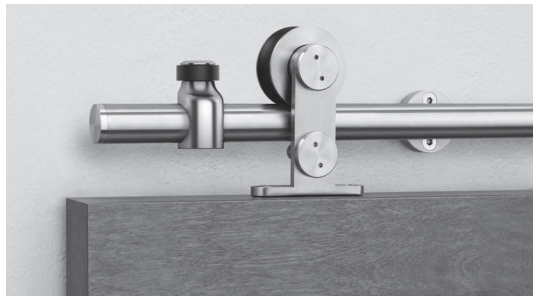

NOTE: Alternate route dimension when using optional EPD3BL

PEMKO
ASSA ABLOY

Experience a safer
and more open world

Configurations:

- Single
- Bi-parting

Features:

- Made of 304 stainless steel
- Nylon coated stainless steel wheel for smooth operation
- 176 lb. panel capacity
- 5 year warranty
- Meets ADA push force requirements

Finishes:

- Brushed Stainless Steel (W60)
- Black Powder Coated Stainless Steel (W60D)

W60 Kits Include:

- 1 ea **BAR/_** Stainless Steel Track
- **BRACKET2** Stainless Steel Wall Brackets
- 2 ea **62** Stainless Steel Hangers
- 1 ea **102SS-KIT** Stainless Steel Guide
- 2 ea **STOP3** Stainless Steel Stops Mounting Hardware
- 2 ea **SC-TRG** Soft Close Activators

NOTE: If ordering individual parts in the optional Black Powder Coat finish, be sure to include a prefix "D" for Black Powder Coat

Standard Kit Sizes			
PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
W60/6	304 Stainless Steel	78 $\frac{3}{4}$ "	36"
W60/8	304 Stainless Steel	98 $\frac{7}{16}$ "	48"
W60D/6	Black Powder Coated 304 Stainless Steel	78 $\frac{3}{4}$ "	36"
W60D/8	Black Powder Coated 304 Stainless Steel	98 $\frac{7}{16}$ "	48"

Custom lengths are available.
Please use the order form available on the Pemko website..

Options:

Hardware Pack (One Door)

Mortise Guides

Polypropylene Guide Rail

5/8" Spacer

Bottom Guide

W60_H/PACK

102N

EPD3BL For Use With 102N
and 102SS-KIT

BLD-SPACER-58 Pack of 5 5/8" Spacer
Recommended for use with 5/8" Gypsum Board
When Mounting Track Directly to Gypsum Board

138N-SG1KIT Surface Mounted Bottom
Guide for 1 3/8" door panels





800-824-3018 | www.pemko.com
Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

STAINLESS STEEL SLIDING TRACK HARDWARE SYSTEM WITH CUSHION STOP CS-W60 SERIES FOR WOOD DOORS

For Sliding Panels up to 176 lbs.

Order Form Required

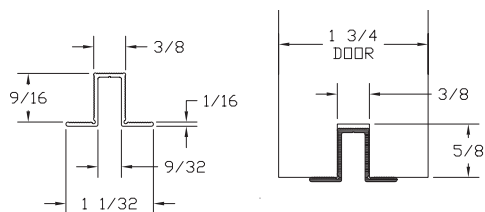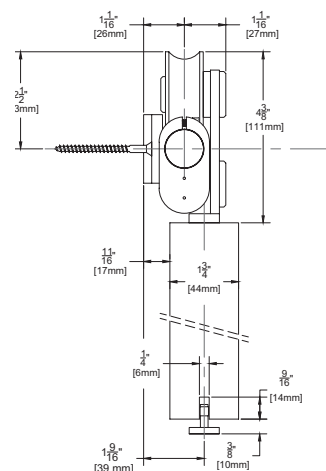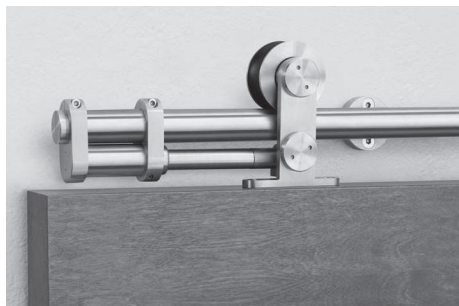

NOTE: Alternate route dimension when using optional EPD3BL

Configurations:

- Single
- Biparting (cushion stops recommended only when opening the door with hard stops in the middle where doors meet)

Installations:

- Side Wall Mount (only)

Features:

- Made of 304 stainless steel
- Prevents door racking and bounce back
- Extends life of upper hardware
- Nylon coated stainless steel wheel for smooth operation
- 176 lb. panel capacity
- 5 year warranty
- Meets ADA push force requirements

Finishes:

- Brushed Stainless Steel (CS-W60)
- Black Powder Coated Stainless Steel (CS-W60D)

CS-W60 Kits Include:

- 1 ea **BAR/_** Stainless Steel Track
- **BRACKET2** Stainless Steel Wall Brackets
- 2 ea **62** Stainless Steel Hangers
- 1 ea **102SS-KIT** Stainless Steel Guide
- 1 pr **CS-001_** Stainless Steel Cushion Stops

NOTE: If ordering individual parts in the optional black powder coat, be sure to include a suffix 'D'.

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
CS-W60/6	304 Stainless Steel	78 3/4"	36"
CS-W60/8	304 Stainless Steel	98 7/16"	48"
CS-W60D/6	Black Powder Coated 304 Stainless Steel	78 3/4"	36"
CS-W60D/8	Black Powder Coated 304 Stainless Steel	98 7/16"	48"

Custom lengths are available.

Please use the order form available on the Pemko website.

Options:

Mortise Guides

Polypropylene Guide Rail

Cushion Stops

5/8" Spacer

Bottom Guide

102N

EPD3BL For Use With 102N and 102SS-KIT

CS-001SS, CS-001D (sold as pair)
For use with existing openings that have W60 hardware installed

BLD-SPACER-58 Pack of 5 5/8" Spacer
Recommended for use with 5/8" Gypsum Board When Mounting Track Directly to Gypsum Board

138N-SG1KIT Surface Mounted Bottom Guide for 1 3/8" door panels

PEMKO
ASSA ABLOY

Experience a safer
and more open world

800-824-3018 | www.pemko.com



Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

SOFT CLOSE STAINLESS STEEL SLIDING TRACK HARDWARE SYSTEM

SFT-W60 SERIES FOR WOOD DOORS

For Sliding Panels up to 176 lbs.
Order Form Required

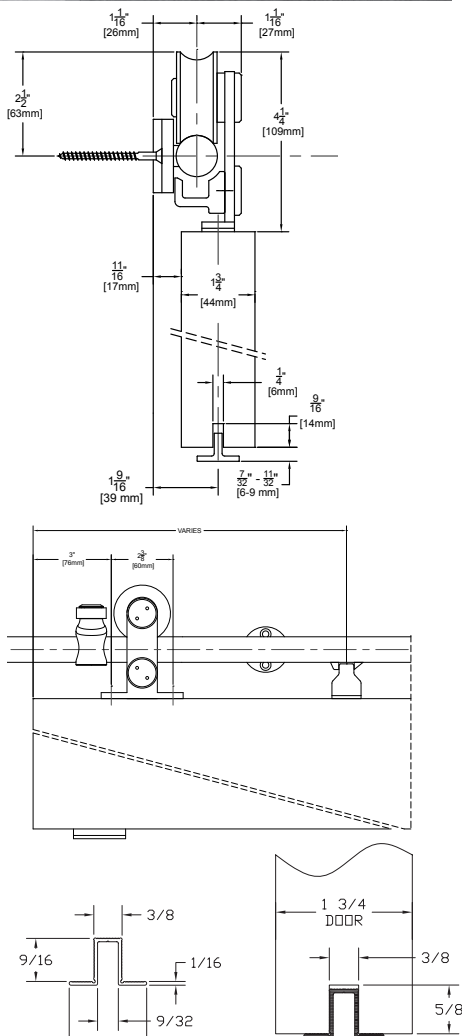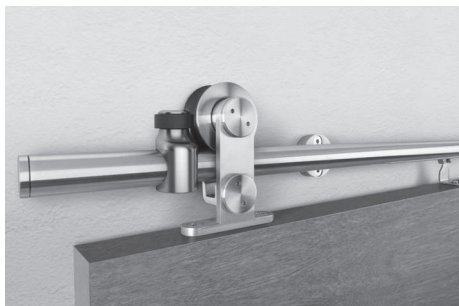

NOTE: Alternate route dimension when using optional EPD3BL

PEMKO
ASSA ABLOY

Experience a safer
and more open world

Configurations:

- Single

Installations:

- Side Wall Mount (only)

Features:

- Made of 304 stainless steel
- Soft Close
- Nylon coated stainless steel wheel for smooth operation
- 176 lb. panel capacity
- 5 year warranty
- Meets ADA push force requirements

Finishes:

- Brushed Stainless Steel

SFT-W60 Kits Include:

- 1 ea **SC-BAR/_** Stainless Steel Track with Two Soft Close Devices
- **BRACKET2** Stainless Steel Wall Brackets
- 2 ea **SC-62** Stainless Steel Hangers
- 1 ea **102SS-KIT** Stainless Steel Guide
- 2 ea **STOP3** Stainless Steel Stops Mounting Hardware
- 2 ea **SC-TRG** Soft Close Activators

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
SFT-W60/6	304 Stainless Steel	78 ³ / ₄ "	36"
SFT-W60/8	304 Stainless Steel	98 ⁷ / ₁₆ "	48"

Custom lengths are not available.

Options:

Hardware Pack (One Door)

Mortise Guides

Polypropylene Guide Rail

5/8" Spacer

Bottom Guide

W60H/PACK

102N

EPD3BL For Use With 102N and 102SS-KIT

BLD-SPACER-58 Pack of 5 5/8" Spacer
Recommended for use with 5/8" Gypsum Board
When Mounting Track Directly to Gypsum Board

138N-SG1KIT Surface Mounted Bottom
Guide for 1 3/8" door panels




800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

STAINLESS STEEL SLIDING TRACK HARDWARE SYSTEM W70 SERIES FOR WOOD DOORS

For Sliding Panels up to 240 lbs.
Order Form Required

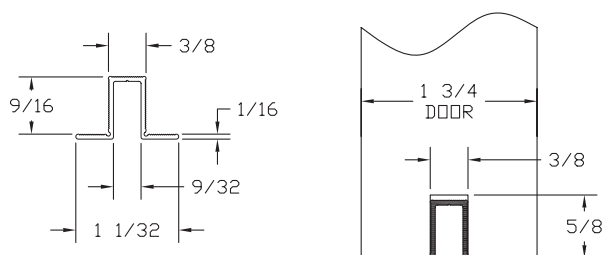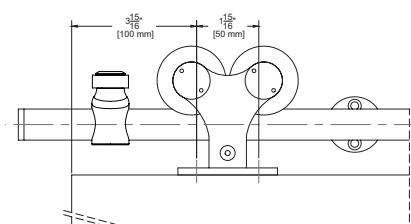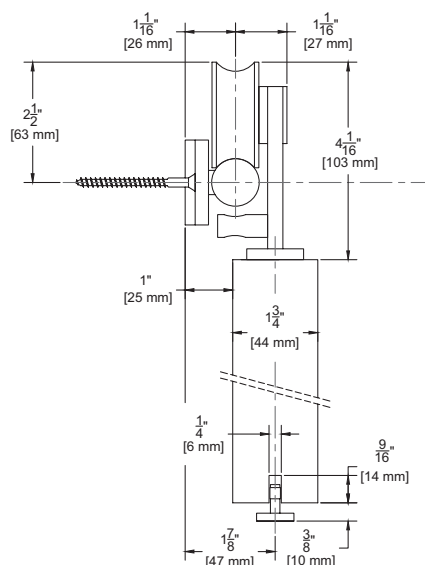

NOTE: Alternate route dimension when using optional EPD3BL

Configurations:

- Single
- Bi-parting

Installations:

- Side Wall Mount (only)

Features:

- Made of 304 stainless steel
- Nylon coated stainless steel wheel for smooth operation
- 240 lb. panel capacity
- 5 year warranty
- Meets ADA push force requirements

Finishes:

- Brushed Stainless Steel (W70)

W70 Kits Include:

- 1 ea **BAR/_** Stainless Steel Track
- **BRACKET2** Stainless Steel Wall Brackets
- 2 ea **WD72** Stainless Steel Hangers
- 1 ea **102SS-KIT** Stainless Steel Guide
- 2 ea **STOP3** Stainless Steel Stops Mounting Hardware

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
W70/6	304 Stainless Steel	78 ³ / ₄ "	36"
W70/8	304 Stainless Steel	98 ⁷ / ₁₆ "	48"

Custom lengths are available.
Please use the order form available on the Pemko website.

Options:

Hardware Pack (One Door)

Mortise Guides

Polypropylene Guide Rail

5/8" Spacer

Bottom Guide

W70_H/PACK

102N

EPD3BL For Use With 102N
and 102SS-KIT

BLD-SPACER-58 Pack of 5 5/8" Spacer
Recommended for use with 5/8" Gypsum Board
When Mounting Track Directly to Gypsum Board

138N-SG1KIT Surface Mounted Bottom
Guide for 1 3/8" door panels

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.




PEMKO
ASSA ABLOY

Experience a safer
and more open world

STAINLESS STEEL SLIDING TRACK HARDWARE SYSTEM

W80 SERIES FOR WOOD DOORS

For Sliding Panels up to 176 lbs.
Order Form Required

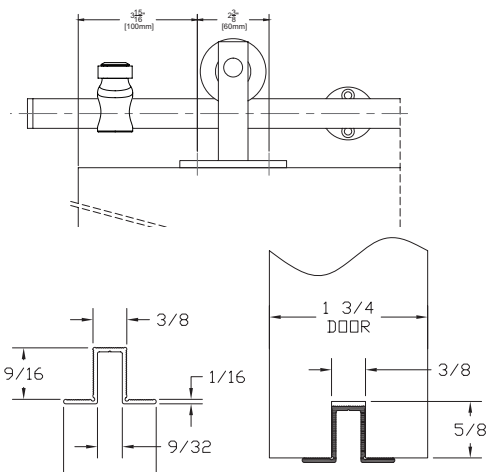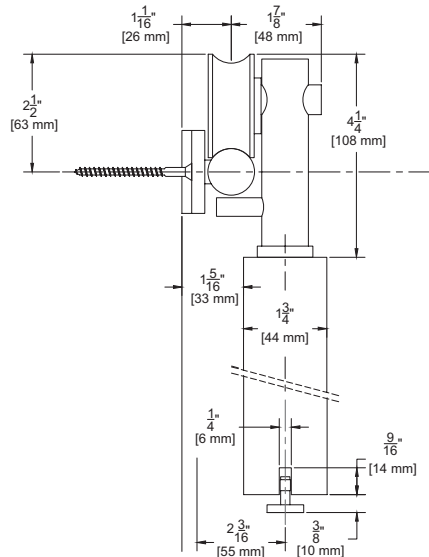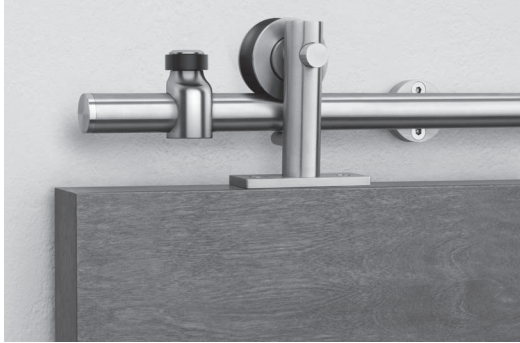

NOTE: Alternate route dimension when using optional EPD3BL

PEMKO
ASSA ABLOY

Experience a safer
and more open world

Configurations:

- Single
- Bi-parting

Installations:

- Side Wall Mount (only)

Features:

- Made of 304 stainless steel
- Nylon coated stainless steel wheel for smooth operation
- 176 lb. panel capacity
- 5 year warranty
- Meets ADA push force requirements

Finishes:

- Brushed Stainless Steel (W80)

W80 Kits Include:

- 1 ea **BAR/_** Stainless Steel Track
- **BRACKET2** Stainless Steel Wall Brackets
- 2 ea **WD82** Stainless Steel Hangers
- 1 ea **102SS-KIT** Stainless Steel Guide
- 2 ea **STOP3** Stainless Steel Stops Mounting Hardware

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
W80/6	304 Stainless Steel	78 ³ / ₄ "	36"
W80/8	304 Stainless Steel	98 ⁷ / ₁₆ "	48"

Custom lengths are available.

Please use the order form available on the Pemko website.

Options:

Hardware Pack (One Door)

Mortise Guides

Polypropylene Guide Rail

5/8" Spacer

Bottom Guide

W80_H/PACK

102N

EPD3BL For Use With 102N
and 102SS-KIT

BLD-SPACER-58 Pack of 5 5/8" Spacer
Recommended for use with 5/8" Gypsum Board
When Mounting Track Directly to Gypsum Board

138N-SG1KIT Surface Mounted Bottom
Guide for 1 3/8" door panels



800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

STAINLESS STEEL SLIDING TRACK HARDWARE SYSTEM W100 SERIES FOR WOOD DOORS

For Sliding Panels up to 198 lbs.
Order Form Required

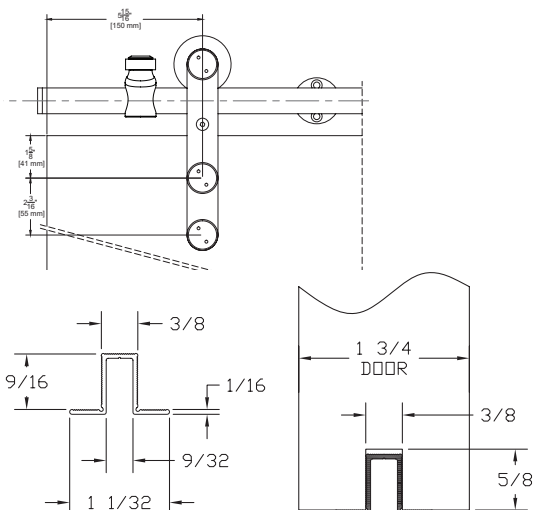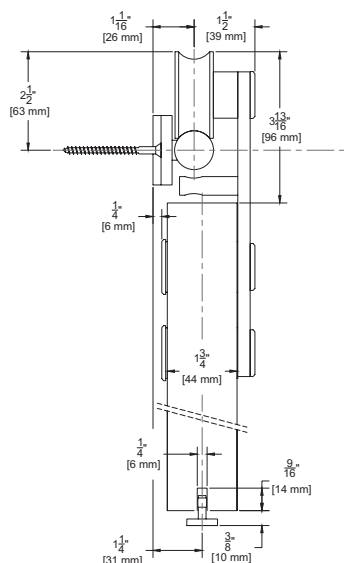

NOTE: Alternate route dimension when using optional EPD3BL

Configurations:

- Single
- Bi-parting

Installations:

- Side Wall Mount (only)

Features:

- Made of 304 stainless steel
- Nylon coated stainless steel wheel for smooth operation
- 198 lb. panel capacity
- 5 year warranty
- Meets ADA push force requirements

Finishes:

- Brushed Stainless Steel (W100)
- Black Powder Coated Stainless Steel (W100D)

W100 Kits Include:

- 1 ea **BAR/_** Stainless Steel Track
- **BRACKET2** Stainless Steel Wall Brackets
- 2 ea **SC-111** Stainless Steel Hangers
- 1 ea **102SS-KIT** Stainless Steel Guide
- 2 ea **STOP3** Stainless Steel Stops Mounting Hardware
- 2 ea **SC-TRG** Soft Close Activators

NOTE: If ordering individual parts in the optional Black Powder Coat finish, be sure to include a prefix "D" for Black Powder Coat

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
W100/6	304 Stainless Steel	78 ³ / ₄ "	36"
W100/8	304 Stainless Steel	98 ⁷ / ₁₆ "	48"
W100D/6	Black Powder Coated 304 Stainless Steel	78 ³ / ₄ "	36"
W100D/8	Black Powder Coated 304 Stainless Steel	98 ⁷ / ₁₆ "	48"

Custom lengths are available.
Please use the order form available on the Pemko website.

Options:

Hardware Pack (One Door)

Mortise Guides

Polypropylene Guide Rail

5/8" Spacer

Bottom Guide

W100_H/PACK

102N

EPD3BL For Use With 102N
and 102SS-KIT

BLD-SPACER-58 Pack of 5 5/8" Spacer
Recommended for use with 5/8" Gypsum Board
When Mounting Track Directly to Gypsum Board

138N-SG1KIT Surface Mounted Bottom
Guide for 1 3/8" door panels

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.





PEMKO
ASSA ABLOY

Experience a safer
and more open world

STAINLESS STEEL SLIDING TRACK HARDWARE SYSTEM WITH CUSHION STOP

CS-W100 SERIES FOR WOOD DOORS

For Sliding Panels up to 198 lbs.
Order Form Required

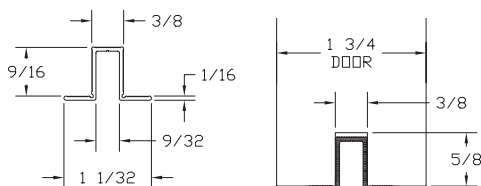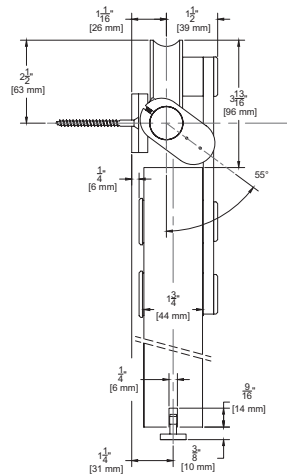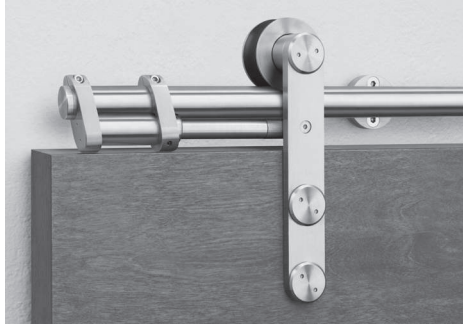

NOTE: Alternate route dimension when using optional EPD3BL

PEMKO
ASSA ABLOY

Experience a safer
and more open world

Configurations:

- Single
- Biparting (cushion stops recommended only when opening the door with hard stops in the middle where doors meet)

Features:

- Made of 304 stainless steel
- Prevents door racking and bounce back
- Extends life of upper hardware
- Nylon coated stainless steel wheel for smooth operation
- 198 lb. panel capacity
- 5 year warranty
- Meets ADA push force requirements

Finishes:

- Brushed Stainless Steel (CS-W100)
- Black Powder Coated Stainless Steel (CS-W100D)

CS-W100 Kits Include:

- 1 ea **BAR/_** Stainless Steel Track
- **BRACKET2** Stainless Steel Wall Brackets
- 2 ea **WD111** Stainless Steel Hangers
- 1 ea **102SS-KIT** Stainless Steel Guide
- 1 pr **CS-003_** Stainless Steel Cushion Stops

NOTE: If ordering individual parts in the optional black powder coat, be sure to include a suffix 'D'.

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
CS-W100/6	304 Stainless Steel	78 ³ / ₄ "	36"
CS-W100/8	304 Stainless Steel	98 ⁷ / ₁₆ "	48"
CS-W100D/6	Black Powder Coated 304 Stainless Steel	78 ³ / ₄ "	36"
CS-W100D/8	Black Powder Coated 304 Stainless Steel	98 ⁷ / ₁₆ "	48"

Custom lengths are available.
Please use the order form available on the Pemko website.

Options:

Mortise Guides

Polypropylene Guide Rail

Cushion Stops

5/8" Spacer

Bottom Guide

102N

EPD3BL For Use With 102N and 102SS-KIT

CS-003SS, CS-003D (sold as pair)
For use with existing openings that have W100 hardware installed

BLD-SPACER-58 Pack of 5 5/8" Spacer
Recommended for use with 5/8" Gypsum Board
When Mounting Track Directly to Gypsum Board

138N-SG1KIT Surface Mounted Bottom
Guide for 1 3/8" door panels


800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

SOFT CLOSE STAINLESS STEEL SLIDING TRACK HARDWARE SYSTEM SFT-W100 SERIES FOR WOOD DOORS

For Sliding Panels up to 198 lbs.
Order Form Required

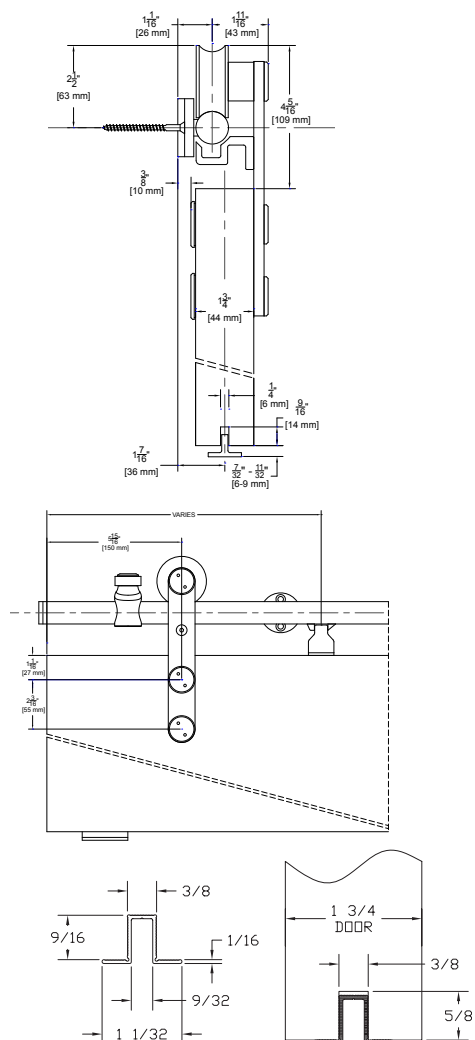

NOTE: Alternate route dimension when using optional EPD3BL

Configurations:

- Single

Installations:

- Side Wall Mount (only)

Features:

- Made of 304 stainless steel
- Soft Close
- Nylon coated stainless steel wheel for smooth operation
- 198 lb. panel capacity
- 5 year warranty
- Meets ADA push force requirements

Finishes:

- Brushed Stainless Steel

SFT-W100 Kits Include:

- 1 ea **SC-BAR/** Stainless Steel Track with Two Soft Close Devices
- **BRACKET2** Stainless Steel Wall Brackets
- 2 ea **SC-111** Stainless Steel Hangers
- 1 ea **102SS-KIT** Stainless Steel Guide
- 2 ea **STOP3** Stainless Steel Stops Mounting Hardware
- 2 ea **SC-TRG** Soft Close Activators

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
SFT-W100/6	304 Stainless Steel	78 ³ / ₄ "	36"
SFT-W100/8	304 Stainless Steel	98 ⁷ / ₁₆ "	48"

Options:

Hardware Pack (One Door) **W100H/PACK**

Mortise Guides **102N**

Polypropylene Guide Rail **EPD3BL** For Use With 102N and 102SS-KIT

5/8" Spacer

BLD-SPACER-58 Pack of 5 5/8" Spacer
Recommended for use with 5/8" Gypsum Board
When Mounting Track Directly to Gypsum Board

Bottom Guide

138N-SG1KIT Surface Mounted Bottom
Guide for 1 3/8" door panels

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.


PEMCO
ASSA ABLOY

Experience a safer
and more open world

BUILDERS SERIES FLAT TRACK SLIDING DOOR HARDWARE SYSTEM

BLD-FT-01 FOR WOOD DOORS

For Sliding Panels up to 240 lbs.

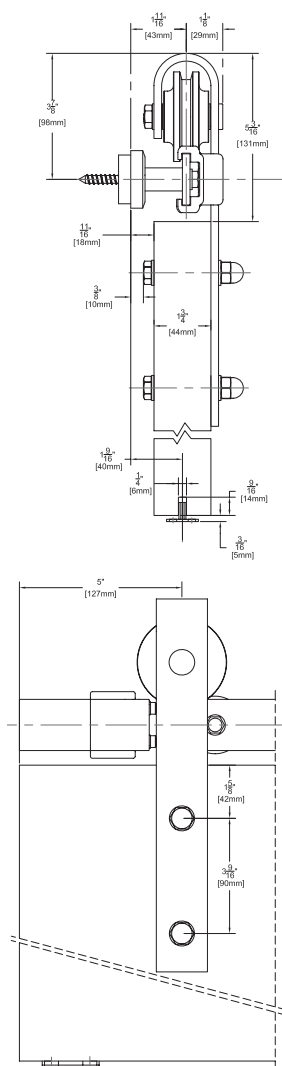

PEMKO
ASSA ABLOY

Experience a safer
and more open world

Configurations:

- Single
- Bi-parting

Installations:

- Side Wall Mount (only)

Features:

- Solid nylon wheel for smooth operation
- 240 lb. panel capacity
- Optional Soft Close
- 5 year warranty
- Meets ADA push force requirements

Finishes:

- Black Suede Powder Coated Steel (BLD-FT-01BSP)
- Industrial Steel Zinc Coated Steel (BLD-FT-01IS)

BLD-FT-01 Kits Include:

- 1 ea **BLD-FT-/_** Steel Flat Track
- 5 ea **BLD-99-/_** Steel Track Brackets
- 5 ea **BLD-88-/_** Steel Track Fasteners
- 2 ea **BLD-01-/_** Steel Strap Mount Hangers
- 2 ea **BLD-77** Anti-Rise Discs
- 1 ea **102N** Mortised Type Nylon Guide
- 2 ea **BLD-11-/_** Steel Track Stops Mounting Hardware

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
BLD-FT-01IS/6	Industrial Steel	72"	36"
BLD-FT-01IS/8	Industrial Steel	96"	48"
BLD-FT-01BSP/6	Black Suede Powder Coated Steel	72"	36"
BLD-FT-01BSP/8	Black Suede Powder Coated Steel	96"	48"

Custom lengths are available. Please contact the factory to order. Industrial Steel maximum track length is 8'. Lengths over 8' will be spliced by factory.

Options:

- Thru-bolts for 1 3/8" thick doors 4 per door
- Hardware Pack (One Door)
- Side Wall Mortised Type Guide
- Polypropylene Guide Rail
- 5/8" Spacer

BLD-97-__


BLD-FT01-__ /PACK

102WN-KIT

EPD3BL For Use With 102N

BLD-SPACER-58 Pack of 5 5/8" Spacer Recommended for use with 5/8" Gypsum Board When Mounting Track Directly to Gypsum Board

Soft Close available. See pages 256-258 for more information.

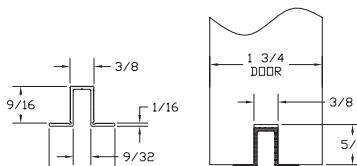

NOTE: Alternate route dimension when using optional EPD3BL

800-824-3018 | www.pemko.com



Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

BUILDERS SERIES FLAT TRACK SLIDING DOOR HARDWARE SYSTEM

BLD-FT-02 FOR WOOD DOORS

For Sliding Panels up to 240 lbs.

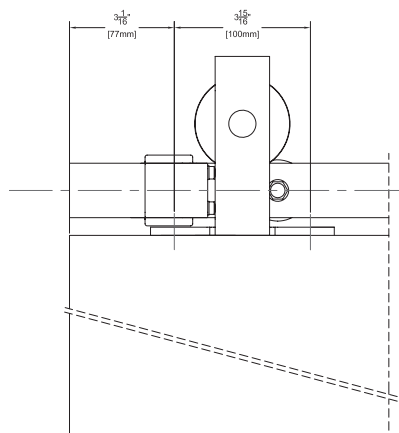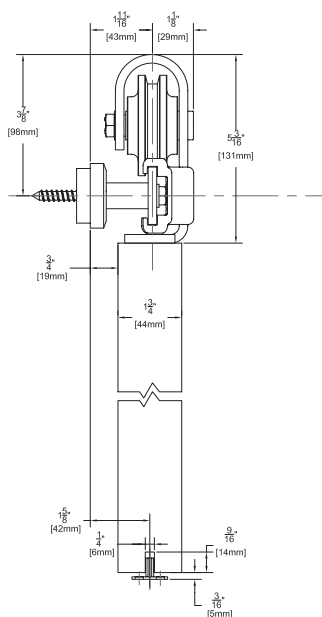

Configurations:

- Single
- Bi-parting

Installations:

- Side Wall Mount (only)

Features:

- Solid nylon wheel for smooth operation
- 240 lb. panel capacity
- Optional Soft Close
- 5 year warranty
- Meets ADA push force requirements

Finishes:

- Black Suede Powder Coated Steel (BLD-FT-02BSP)
- Industrial Steel Zinc Coated Steel (BLD-FT-02IS)

BLD-FT-02 Kits Include:

- 1 ea **BLD-FT-/_** Steel Flat Track
- 5 ea **BLD-99-/_** Steel Track Brackets
- 5 ea **BLD-88-/_** Steel Track Fasteners
- 2 ea **BLD-02-/_** Steel Top Mount Hangers
- 2 ea **BLD-77** Anti-Rise Discs
- 1 ea **102N** Mortised Type Nylon Guide
- 2 ea **BLD-11-/_** Steel Track Stops Mounting Hardware

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
BLD-FT-02IS/6	Industrial Steel	72"	36"
BLD-FT-02IS/8	Industrial Steel	96"	48"
BLD-FT-02BSP/6	Black Suede Powder Coated Steel	72"	36"
BLD-FT-02BSP/8	Black Suede Powder Coated Steel	96"	48"

Custom lengths are available. Please contact the factory to order. Industrial Steel maximum track length is 8'. Lengths over 8' will be spliced by factory.

Options: See page 278

Hardware Pack (One Door)

Side Wall Mortised Type Guide

Polypropylene Guide Rail

5/8" Spacer

BLD-FT02-_/PACK

102WN-KIT

EPD3BL For Use With 102N


BLD-SPACER-58 Pack of 5 5/8" Spacer

Recommended for use with 5/8" Gypsum Board When Mounting Track Directly to Gypsum Board

Bottom Guide

138N-SG1KIT Surface Mounted Bottom Guide for 1 3/8" door panels

Soft Close available. See pages 256-258 for more information.

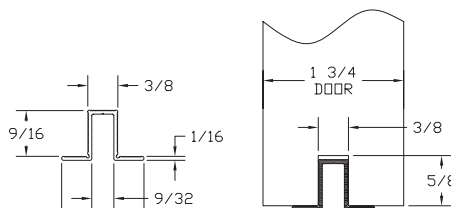

NOTE: Alternate route dimension when using optional EPD3BL

PEMKO
ASSA ABLOY

Experience a safer
and more open world

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.



DESIGNER SERIES FLAT TRACK SLIDING DOOR HARDWARE SYSTEM

DSG-FT-05 FOR WOOD DOORS


For Sliding Panels up to 500 lbs.



Shown in Industrial Steel finish

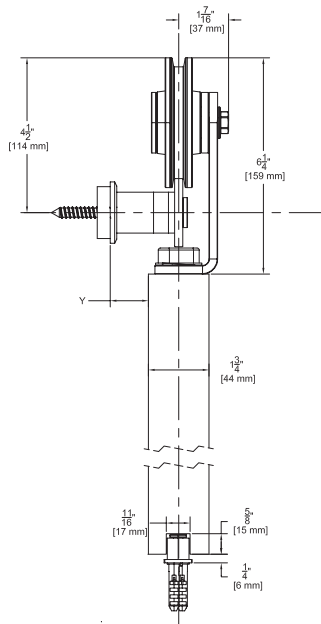

Wall Bracket Combination				
A	A+C	A+B	A+B+C	
"Y"	1/2"	3/4"	1"	1-1/4"



PEMKO
ASSA ABLOY

Experience a safer
and more open world

Configurations:

- Single
- Bi-parting

Installations:

- Side Wall Mount (only)

Features:

- Solid steel wheel with a polymer resin contact surface for smooth operation
- 500 lb. panel capacity
- 5 year warranty

Finishes:

- Black Suede Powder Coated Steel (DSG-FT-05BSP)
- Stainless Steel (DSG-FT-05SS)

DSG-FT-05 Kits include:

- 1 ea **DSG-FT_/_** Steel Flat Track
- 7 to 9 ea **DSG-100_** Steel Track Brackets
- 7 to 9 ea **DSG-89_** Steel Track Fasteners
- 2 ea **DSG-05_** Steel Top Mount Hangers
- 2 ea **DSG-78** Anti-Rise Blocks
- 1 ea **DSG-106** Mortised Type Roller Guide
- 2 ea **DSG-12_** Steel Track Stops Mounting Hardware

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
DSG-FT-05BSP/6	Black Suede Powder Coated Steel	72"	36"
DSG-FT-05BSP/8	Black Suede Powder Coated Steel	96"	48"
DSG-FT-05SS/6	Stainless Steel	72"	36"
DSG-FT-05SS/8	Stainless Steel	96"	48"
DSG-FT-05IS/6	Industrial Steel	72"	36"
DSG-FT-05IS/8	Industrial Steel	96"	48"

Custom lengths are available. Please contact the factory to order. Industrial Steel maximum track length is 8'. Lengths over 8' will be spliced by factory.

Options:

- Hardware Pack (One Door)
- Side Wall Mortised Type Guide
- 5/8" Spacer

DSG-FT05-__/_PACK

102WN-KIT

BLD-SPACER-58 Pack of 5 5/8" Spacer Recommended for use with 5/8" Gypsum Board When Mounting Track Directly to Gypsum Board

Soft Close available. See pages 256-258 for more information.

800-824-3018 | www.pemko.com
Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

DESIGNER SERIES FLAT TRACK SLIDING DOOR HARDWARE SYSTEM



DSG-FT-06 FOR WOOD DOORS

For Sliding Panels up to 500 lbs.


Only for doors 1 1/2" to 2 1/4" thick.



Shown in Stainless Steel with a solid wheel. DSG-FT-06 in all other finishes have spoked wheels.

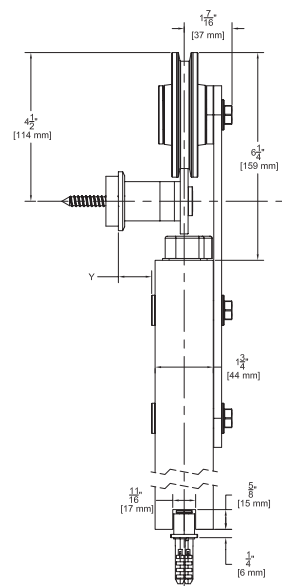

Wall Bracket Combination				
	A	A+C	A+B	A+B+C
"Y"	7/16"	11/16"	7/8"	1-1/8"



Configurations:

- Single
- Bi-parting

Installations:

- Side Wall Mount (only)

Features:

- Solid steel wheel with a polymer resin contact surface for smooth operation
- 500 lb. panel capacity
- 5 year warranty

Finishes:

- Black Black Suede Powder Coated Steel (DSG-FT-06BSP)
- Stainless Steel (DSG-FT-06SS)

DSG-FT-06 Kits include:

- 1 ea **DSG-FT-/_** Steel Flat Track
- 7 to 9 ea **DSG-100-/_** Steel Track Brackets
- 7 to 9 ea **DSG-89-/_** Steel Track Fasteners
- 2 ea **DSG-06-/_** Steel Top Mount Hangers
- 2 ea **DSG-78** Anti-Rise Blocks
- 1 ea **DSG-106** Mortised Type Roller Guide
- 2 ea **DSG-12-/_** Steel Track Stops Mounting Hardware

Standard Kit Sizes

PART NUMBER	MATERIAL	TRACK LENGTH	DOOR WIDTH
DSG-FT-06BSP/6	Black Suede Powder Coated Steel	72"	36"
DSG-FT-06BSP/8	Black Suede Powder Coated Steel	96"	48"
DSG-FT-06SS/6	Stainless Steel	72"	36"
DSG-FT-06SS/8	Stainless Steel	96"	48"

Custom lengths are available. Please contact the factory to order. Industrial Steel maximum track length is 8'. Lengths over 8' will be spliced by factory.

Options:

- Hardware Pack (One Door)
- Side Wall Mortised Type Guide
- 5/8" Spacer

DSG-FT06-_/PACK

102WN-KIT

BLD-SPACER-58 Pack of 5 5/8" Spacer Recommended for use with 5/8" Gypsum Board When Mounting Track Directly to Gypsum Board

Soft Close available. See pages 256-258 for more information.

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog


Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY


Experience a safer
and more open world

SIMULTANEOUS ACTING SLIDING DOOR SYSTEM SIM 150 FOR 2 DOOR SYSTEMS

For Sliding Panels up to 176 lbs.

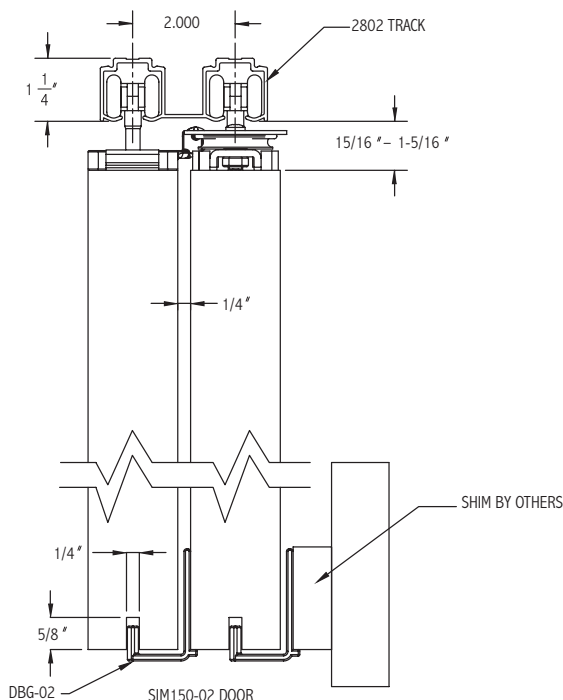

Alternate Route for EPD3BL

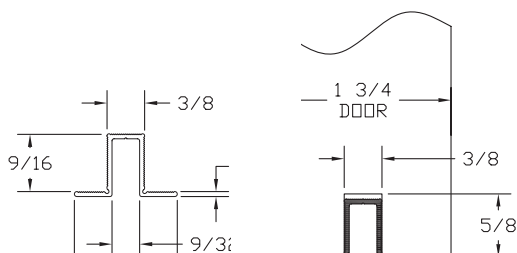

PEMKO
ASSA ABLOY

Experience a safer
and more open world

Configurations:

- Bi-part Telescoping

Installations:

- Overhead Mount

Features:

- Easy to install with self aligning components
- Telescoping panels glide along the track
- Doors retract into storage pockets when not in use
- 5 year warranty

Finishes:

- Clear (C)
- Dark Bronze (D)

Pulley System Kit Includes:

Pre-Assembled Pulley System
In-Track Stops and Hangers
Door Bottom Guides
Floor Stops, Back Stop and End Plates
Installation Fasteners

Single Extrusion Aluminum Track must be ordered separately.

Specify door width when ordering. Default door overlap is 3". Any other overlap must be specified (Min. overlap is 2").

Note: All doors must be of equal width.

Pulley System Kits	
PART NUMBER	DOOR WIDTH
SIM150-2-LH/25-32	25" - 32"
SIM150-2-LH/33-40	33" - 40"
SIM150-2-LH/41-48	41" - 48"
SIM150-2-RH/25-32	25" - 32"
SIM150-2-RH/33-40	33" - 40"
SIM150-2-RH/41-48	41" - 48"

System Track Ordered Separately		
TRACK	FINISH	TRACK LENGTH
2802C	Clear	up to 147"
2802D	Dark	up to 185"

Options:

Lock Kit- includes lock with edge pull, and cup pull, **SIM150-LOCKKIT**

Bolt Kit- includes surface bolt, dust-proof strike, cup pull, and edge pull, **SIM150-BOLTKIT**

Snap-on Fascia Available **F134**


Polypropylene Guide Rail **EPD3BL**

800-824-3018 | www.pemko.com
Check the web site for the up-to-date catalog


Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

SIMULTANEOUS ACTING SLIDING DOOR SYSTEM SIM 150 FOR 3 DOOR SYSTEMS

For Sliding Panels up to 176 lbs.

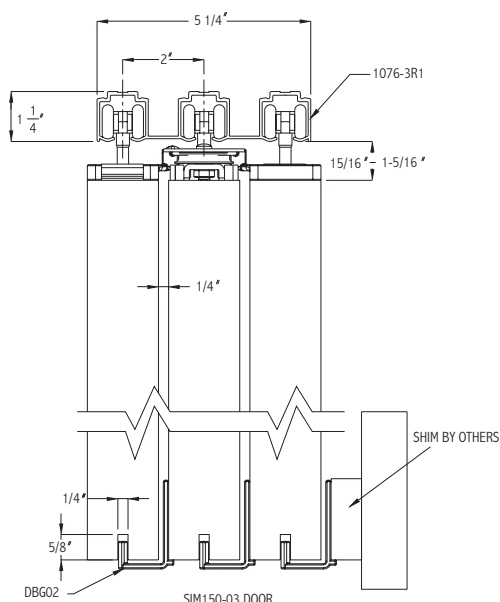

Alternate Route for EPD3BL

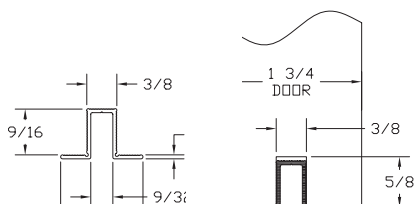

Configurations:

- Bi-part Telescoping

Installations:

- Overhead Mount

Features:

- Easy to install with self aligning components
- Telescoping panels glide along the track
- Doors retract into storage pockets when not in use
- 5 year warranty

Finishes:

- Clear (C)
- Dark Bronze (D)

Pulley System Kit Includes:

Pre-Assembled Pulley System
In-Track Stops and Hangers
Door Bottom Guides
Floor Stops, Back Stop and End Plates
Installation Fasteners

Single Extrusion Aluminum Track must be ordered separately.

Specify door width when ordering. Default door overlap is 3".
Any other overlap must be specified (Min. overlap is 2").

Note: All doors must be of equal width.

Pulley System Kits

PART NUMBER	DOOR WIDTH
SIM150-3-LH/25-32	25" - 32"
SIM150-3-LH/33-40	33" - 40"
SIM150-3-LH/41-48	41" - 48"
SIM150-3-RH/25-32	25" - 32"
SIM150-3-RH/33-40	33" - 40"
SIM150-3-RH/41-48	41" - 48"

System Track Ordered Separately

TRACK	FINISH	TRACK LENGTH
2803C and 280C	Clear	up to 144"
2803D and 280D	Dark	up to 144"

Options:

Lock Kit- includes lock with edge pull, and cup pull, **SIM150-LOCKKIT**

Bolt Kit- includes surface bolt, dust-proof strike, cup pull, and edge pull, **SIM150-BOLTKIT**

Snap-on Fascia Available **F134**

Polypropylene Guide Rail **EPD3BL**

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY

Experience a safer
and more open world

CASCADING SLIDING DOOR SYSTEM

For Sliding Panels up to 200 lbs. each.




Note: All doors must be of equal width.
Minimum overlap between doors is 2".

Cased Opening



Pocket

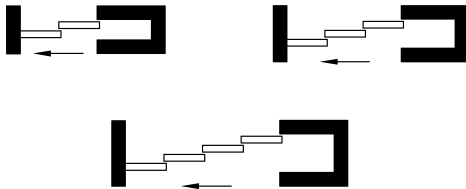

Side Wall Mount

NOTE: Side Wall track Brackets Shown Under Options Must be Ordered Separately for Side Wall Mount Openings



Configurations:

- Bi-part Telescoping
- Single Direction Telescoping

Features:

- Opening and closing of lead door results in the trailing doors to follow because of interlocking hardware at door top edges
- Easy to install with self aligning components on 1 3/4" and 1 3/8" thick doors
- Telescoping panels glide along the track
- Solid steel catches with rubber bumpers ensure durable yet quiet operation
- 200 lb. per door weight capacity
- 5 year warranty

Cascading Kit Includes:

CAS-05 Catches - Mechanical Catch system - 2 Per Door

601H - Track Stops - 2 Per Door

H222R1 - Hangers - 2 Per Door

DBG-02R1 - Door Bottom Guides - 1 Per Door

TELS-23 - End Plates - 2 Per Door

2802C - Single Extrusion - Dual Track

280C - Single Extrusion - Single Track

C1076-TC - Track Connector for CAS200A-4/_ Kits

EPD3-BL - Polypropylene Guide Rails - 1 Per Door

WRENCH14 - 1 Hanger Wrench Hardware Fasteners

Cascading System Kits

PART NUMBER	TRACK LENGTH	# OF DOORS	INSTALLATION
CAS200A-2/6	6'	2	Pocket Side Wall
CAS200A-2/8	8'	2	
CAS200A-2/10	10'	2	
CAS200A-2/12	12'	2	
CAS200A-3/8	8'	3	Pocket Cased Opening Side Wall
CAS200A-3/10	10'	3	
CAS200A-3/12	12'	3	
CAS200A-3/16	16'	3	
CAS200A-4/8	8'	4	Pocket Cased Opening
CAS200A-4/10	10'	4	
CAS200A-4/12	12'	4	
CAS200A-4/16	16'	4	

For special number of doors and for dark bronze track, please contact Technical Support for more information

Options:

Lock Kit	SIM150-LOCKKIT includes lock with edge pull and cup pull
Bolt Kit	SIM150-BOLTKIT includes surface bolt, dust-proof strike, cup pull, and edge pull
Fascia	F134C Snap-on Fascia
Splice Kit	C1076-2SPLKIT for use with Bi-Parting systems and 2802C Track C1076-3SPLKIT for use with Bi-Parting systems and 2803C Track
Back Stop	TELS-25 for use with pocket systems when no access to in track stops in pocket
Side Wall Track Bracket	2812KIT for use with 2802C Track (1 for every 12" of track) 2813KIT for use with 2803C Track (1 for every 12" of track)
Side Wall Joining Bracket	2813-5KIT for use with Side Wall Bi-Parting systems and 2803C Track

PEMKO
ASSA ABLOY

Experience a safer
and more open world

800-824-3018 | www.pemko.com
Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKOMATIC™ SLIDING DOOR OPERATOR

Automates Sliding Doors

Our PemkoMatic™ (PSLIDE) low energy automatic door operating system offers versatile electromechanical solutions for manual sliding doors, featuring convenient multi-access options including a wave-to-open sensor, push button, or keypad. Designed to fit seamlessly with both pocket and sliding doors, it is ideal for new installations as well as retrofitting existing openings. The system features a sleek cover, combining functionality with a clean, aesthetically pleasing design.

Installations:

- Overhead Mounted Sliding Systems
- Side Wall Mounted Sliding Systems

Features:


- Sliding Door Types: Barn Door and Pocket Doors
- 36" L x 2.5" W x 3" H
- Mounts to header
- Optional adapter bracket available for non-header installations
- Recess into the wall for full-opening width access
- Cover and track can be cut to size
- 330 lb. per door weight capacity, supports door widths up to the maximum door weight capacity
- Easy-to-use controls
- New construction or retrofit
- Designed for smooth and silent door movement
- Two 20" tracks, additional tracks are needed for doors wider than 40"
- Field Reversible (Left-hand supplied)
- Customizable settings
 - Green/Auto Mode: Ideal for everyday use with open-assist enabled and the door unlocked
 - Blue/Hold Open Mode: Keeps the door fully open by default for convenience
 - Red/Lock Mode: Open-assist is disabled, the door is locked, and access is only available through a keypad or door activator

Finishes:

- Black
- White
- Clear Anodized Aluminum

Inside The Device:

- 2 ea End Caps
- 1 ea Base
- 1 ea Cover
- 1 ea Power Adaptor
- 1 ea Control Panel
- 2 ea Brush
- 1 ea Motor

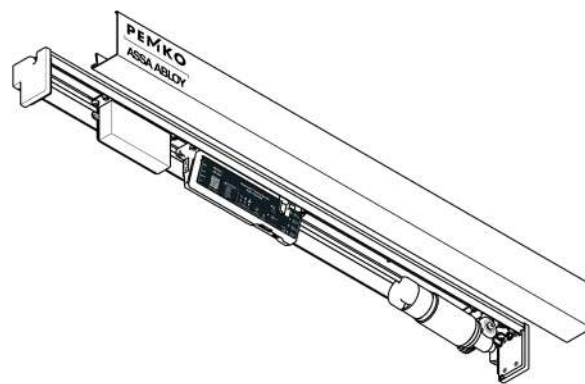

Features - Electrical, Certifications and Standards:

- Input for Power Adapter - 120V, 50/60HZ, 2.7A
- Adjustable 0-24 second open time
- Customizable DIP Switches
- Power level for lightweight or heavy doors, beeper alerts
- Reverts to a manual sliding door in the event of power failure
- Operator certified to ANSI/UL standard 325 for automatic closing doors
- Tested to ANSI BHMA A156.38
- Door activators have a 12 month battery life and power supplies of 3V – two CR2032 batteries
- Can be installed and adjusted to conform with ADA regulations
- Door activators comply with part 15 of FCC Rules

PemkoMatic™ Kits Include:

1 ea	Sliding Operator (PSLIDE)	4 Motor Wheels in Different Lengths
2 ea	Slim Track (ST-PSLIDE)	Fasteners and double-sided tapes for mounting activators
1 ea	Keypad (KP-PSLIDE)	Cable retaining clips
1 ea	Wave Sensors (WP-PSLIDE)	Cable for hardwiring Wave Sensors and Mode Pad
1 ea	Mode Pad (MP-PSLIDE)	'Wave to Open' Sticker
16 ea	(#8 x 1") Wood Screws	'Automatic Door' Sticker
8 ea	(#8 x 1") Sheet Metal Screws	
1 ea	Hex Key, Screwdriver, Wrench	

Standard Kit Sizes

PART NUMBER	DESCRIPTION	PRODUCT SIZE (L X W X H)
PSLIDE-BSP/36	Black Automatic System	5.5" x 1.5" x 0.5"
PSLIDE-WSP/36	White Automatic System	5" x 1.5" x 0.5"
PSLIDE-C/36	Clear Aluminum Automatic System	3.5" x 3" x 1.5"

Options:

Wave Sensor	WS-PSLIDE
Push Button	PB-PSLIDE
Keypad	KP-PSLIDE

PEMKO
ASSA ABLOY

Experience a safer
and more open world

800-824-3018 | www.pemko.com


Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.


PEMPASS™ HEALTHCARE SPLIT TRACK SLIDING DOOR SYSTEM



PEMPASS-W60: Wood Door

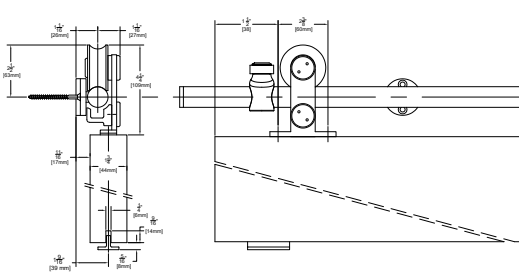

PEMPASS-W100: Wood Door

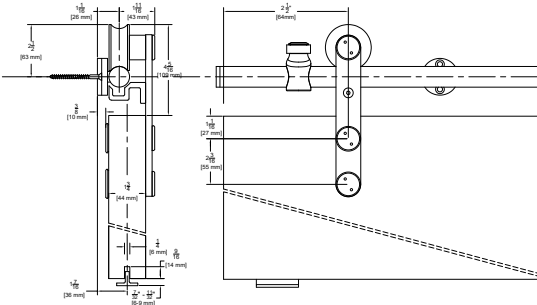

Configuration:

- Dual Track

Installation:

- Side Wall Mount

Features:

- Healthcare environments requiring a center gap for ceiling-mounted lift systems.
- Allows the door to smoothly cross a center gap of up to 12 inches
- Top-mounted hangers for wood doors (W60) or face-mounted hangers for wood or metal doors (W100).
- 304 stainless steel construction for durability and corrosion resistance

Finish:

- US32D Brushed Stainless Steel


PemPass™ Kit Includes:

- Short Track and Long Track segments
- Door Stops and Hangers
- Wall Brackets
- Floor Guide
- Dry Wall Spacers
- Fasteners, Wrench and Hex Key

Standard Kit Sizes

PART NUMBER	MATERIAL	DOOR WIDTH	TRACK LENGTH
PEMPASS-W60	Wood	36" - 72"	67" - 144"
PEMPASS-W100	Wood or Metal	36" - 72"	67" - 144"

PEMPASS-W100: Metal Door

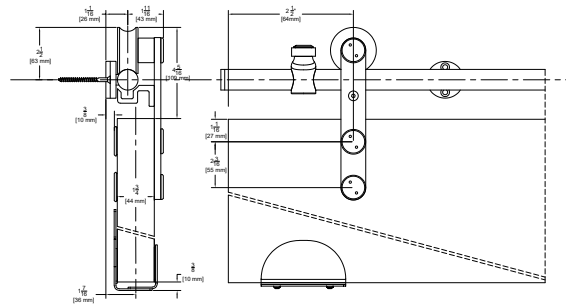



PEM KO
ASSA ABLOY

Experience a safer
and more open world

800-824-3018 | www.pemko.com
Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PRIVACY BARN DOOR LOCK PEMKO SDL SERIES FOR SURFACE MOUNTED SLIDING DOORS

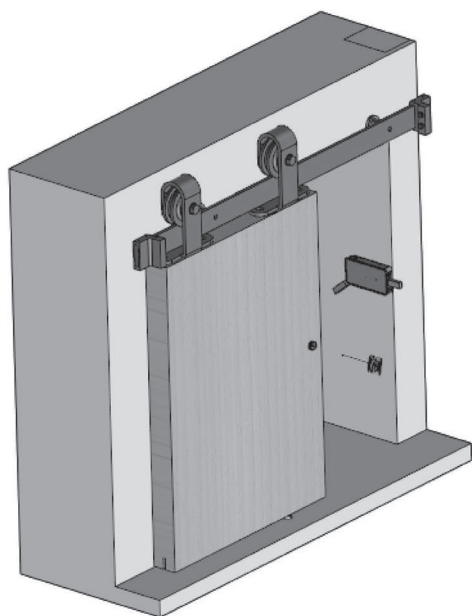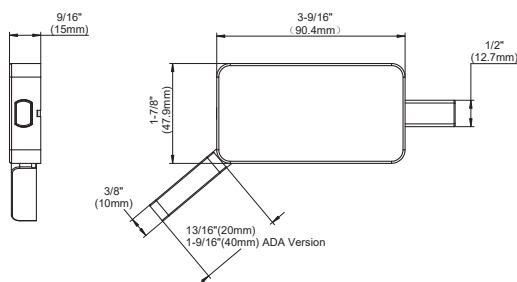

NOTE: For doors with 3/8" - 3/4" clearance
between the wall or frame & door face

Configurations:

- Single

Installations:

- Side Wall Mount (only)
- For Side Wall Mounted Sliding Door Openings only
- New Construction
- Retro
- ADA

Features:

- Quick and easy installation
- Handing is reversible in the field
- ADA option available
- Privacy Function
- Includes Emergency Release Key
- Doors can be prepped in the field
- 5 year warranty

Finishes:

- Brushed Stainless Steel
- Polished Stainless Steel
- Black Graphite
- Contact factory if custom finish is required for more information

Standard Kit Sizes		
PART NUMBER	MATERIAL	ADA COMPLIANT
SDL32D	Brushed Stainless	
SDL32	Polished Stainless	
SDL32D-ADA	Brushed Stainless	•
SDL32-ADA	Polished Stainless	•
SDL19-ADA	Black Graphite	•

Compatible with the following Pemko sliding door kits:

- W60 Series
- W70 Series (with 3/8" to 3/4" clearance)
- W80 Series (with 3/8" to 3/4" clearance)
- W90 Series (with 3/8" to 3/4" clearance)
- W100 Series
- Side Wall Box Track Series (SWT)
- BLD Flat Track Series
- DSG Flat Track Series (with 3/8" to 3/4" clearance)

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY

Experience a safer
and more open world

OPTIONS & ACCESSORIES

A visual guide to various parts

Mounting Brackets




281
(Sold in 5 packs, PC2815)



2812

Fascia



F134

End plates



K134EP


Stops



TELS-14KIT



PFBS



601H

Guides



102N



PFBG-4



106R/94



102WA



PFBG-8



106N/94

Pulls and Flush Bolts




503SF




FB150SS

Hardware Kits



Folding
HF2/100 Pack

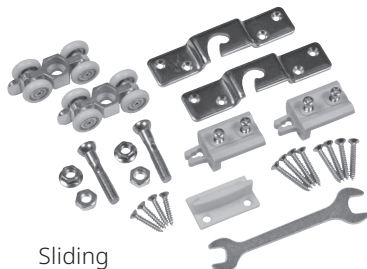

Sliding
H200PACK

Bottom Channel



94A



2802BT

Privacy Seals



PEMKOSFSET1



PEMKOSFSET2



PEMKOSFSET3



PEMKOSFSET4



PEMKOSFSET5

For more information, see page 196

PEMKO
ASSA ABLOY

Experience a safer
and more open world

800-824-3018 | www.pemko.com
Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

SOFT CLOSE FOR PEMKO BOX TRACK SYSTEMS

For Pemko H200, SHS80, HBP200, and Side Wall Track (SWT) systems

Minimum Door Width 28" When Using Dual or Single Devices.

Please Note: The warranty is void if door weight does not match the rated capacity of the soft-close mechanism.

For doors weighing 88-132 lbs.		For doors weighing 133-176 lbs.	
ITEM #	DESCRIPTION	ITEM #	DESCRIPTION
SHS80 /6-1411-1	SHS80 6' Single Device	SHS80 /6-1413-1	SHS80 6' Single Device
SHS80 /8-1411-1	SHS80 8' Single Device	SHS80 /8-1413-1	SHS80 8' Single Device
SHS80 /6-1411-2	SHS80 6' Dual Devices	SHS80 /6-1413-2	SHS80 6' Dual Devices
SHS80 /8-1411-2	SHS80 8' Dual Devices	SHS80 /8-1413-2	SHS80 8' Dual Devices
H200 /6-1411-1	H200 6' Single Device	H200 /6-1413-1	H200 6' Single Device
H200 /8-1411-1	H200 8' Single Device	H200 /8-1413-1	H200 8' Single Device
H200 /10-1411-1	H200 10' Single Device	H200 /10-1413-1	H200 10' Single Device
H200 /12-1411-1	H200 12' Single Device	H200 /12-1413-1	H200 12' Single Device
H200 /6-1411-2	H200 6' Dual Devices	H200 /6-1413-2	H200 6' Dual Devices
H200 /8-1411-2	H200 8' Dual Devices	H200 /8-1413-2	H200 8' Dual Devices
H200 /10-1411-2	H200 10' Dual Devices	H200 /10-1413-2	H200 10' Dual Devices
H200 /12-1411-2	H200 12' Dual Devices	H200 /12-1413-2	H200 12' Dual Devices
280 -SWTKIT/6-1411-1	280 -SWTKIT 6' Single Device	280 -SWTKIT/6-1413-1	280 -SWTKIT 6' Single Device
280 -SWTKIT/8-1411-1	280 -SWTKIT 8' Single Device	280 -SWTKIT/8-1413-1	280 -SWTKIT 8' Single Device
280 -SWTKIT/12-1411-1	280 -SWTKIT 12' One Device Per Door	280 -SWTKIT/12-1413-1	280 -SWTKIT 12' One Device per Door
280 -SWTKIT/6-1411-2	280 -SWTKIT 6' Dual Devices	280 -SWTKIT/6-1413-2	280 -SWTKIT 6' Dual Devices
280 -SWTKIT/8-1411-2	280 -SWTKIT 8' Dual Devices	280 -SWTKIT/8-1413-2	280 -SWTKIT 8' Dual Devices
280 -SWTKIT/12-1411-2	280 -SWTKIT 12' Two Devices Per Door	280 -SWTKIT/12-1413-2	280 -SWTKIT 12' Two Devices per Door
RF280 -SWTK/6-1411-1	RF280 -SWTK 6' Single Device	RF280 -SWTK/6-1413-1	RF280 -SWTK 6' Single Device
RF280 -SWTK/8-1411-1	RF280 -SWTK 8' Single Device	RF280 -SWTK/8-1413-1	RF280 -SWTK 8' Single Device
RF280 -SWTK/12-1411-1	RF280 -SWTK 12' One Device Per Door	RF280 -SWTK/12-1413-1	RF280 -SWTK 12' One Device per Door
RF280 -SWTK/6-1411-2	RF280 -SWTK 6' Dual Devices	RF280 -SWTK/6-1413-2	RF280 -SWTK 6' Dual Devices
RF280 -SWTK/8-1411-2	RF280 -SWTK 8' Dual Devices	RF280 -SWTK/8-1413-2	RF280 -SWTK 8' Dual Devices
RF280 -SWTK/12-1411-2	RF280 -SWTK 12' Two Devices Per Door	RF280 -SWTK/12-1413-2	RF280 -SWTK 12' Two Devices per Door
SF280 -SWTK/6-1411-1	SF280 -SWTK 6' Single Device	SF280 -SWTK/6-1413-1	SF280 -SWTK 6' Single Device
SF280 -SWTK/8-1411-1	SF280 -SWTK 8' Single Device	SF280 -SWTK/8-1413-1	SF280 -SWTK 8' Single Device
SF280 -SWTK/12-1411-1	SF280 -SWTK 12' One Device Per Door	SF280 -SWTK/12-1413-1	SF280 -SWTK 12' One Device per Door
SF280 -SWTK/6-1411-2	SF280 -SWTK 6' Dual Devices	SF280 -SWTK/6-1413-2	SF280 -SWTK 6' Dual Devices
SF280 -SWTK/8-1411-2	SF280 -SWTK 8' Dual Devices	SF280 -SWTK/8-1413-2	SF280 -SWTK 8' Dual Devices
SF280 -SWTK/12-1411-2	SF280 -SWTK 12' Two Devices Per Door	SF280 -SWTK/12-1413-2	SF280 -SWTK 12' Two Devices per Door
HBP200 /6-1411-1	HBP200 6' One Device Per Door	HBP200 /6-1413-1	HBP200 6' One Device Per Door
HBP200 /8-1411-1	HBP200 8' One Device Per Door	HBP200 /8-1413-1	HBP200 8' One Device Per Door
HBP200 /10-1411-1	HBP200 10' One Device Per Door	HBP200 /10-1413-1	HBP200 10' One Device Per Door
HBP200 /12-1411-1	HBP200 12' One Device Per Door	HBP200 /12-1413-1	HBP200 12' One Device Per Door
HBP200 /6-1411-2	HBP200 6' Two Devices Per Door	HBP200 /6-1413-2	HBP200 6' Two Devices Per Door
HBP200 /8-1411-2	HBP200 8' Two Devices Per Door	HBP200 /8-1413-2	HBP200 8' Two Devices Per Door
HBP200 /10-1411-2	HBP200 10' Two Devices Per Door	HBP200 /10-1413-2	HBP200 10' Two Devices Per Door
HBP200 /12-1411-2	HBP200 12' Two Devices Per Door	HBP200 /12-1413-2	HBP200 12' Two Devices Per Door

SOFT CLOSE FOR PEMKO BOX TRACK SYSTEMS *(Continued)*

For Pemko H200, SHS80, HBP200, and Side Wall Track (SWT) systems

Minimum Door Width 28" When Using Dual or Single Devices.

For doors weighing 177-200 lbs.

ITEM #	DESCRIPTION
SHS80 /6-1418-1	SHS80 6' Single Device
SHS80 /8-1418-1	SHS80 8' Single Device
SHS80 /6-1418-2	SHS80 6' Dual Devices
SHS80 /8-1418-2	SHS80 8' Dual Devices
H200 /6-1418-1	H200 6' Single Device
H200 /8-1418-1	H200 8' Single Device
H200 /10-1418-1	H200 10' Single Device
H200 /12-1418-1	H200 12' Single Device
H200 /6-1418-2	H200 6' Dual Devices
H200 /8-1418-2	H200 8' Dual Devices
H200 /10-1418-2	H200 10' Dual Devices
H200 /12-1418-2	H200 12' Dual Devices
280 -SWTKIT/6-1418-1	280 -SWTKIT 6' Single Device
280 -SWTKIT/8-1418-1	280 -SWTKIT 8' Single Device
280 -SWTKIT/12-1418-1	280 -SWTKIT 12' One Device Per Door
280 -SWTKIT/6-1418-2	280 -SWTKIT 6' Dual Devices
280 -SWTKIT/8-1418-2	280 -SWTKIT 8' Dual Devices
280 -SWTKIT/12-1418-2	280 -SWTKIT 12' Two Devices Per Door
RF280 -SWTK/6-1418-1	RF280 -SWTK 6' Single Device
RF280 -SWTK/8-1418-1	RF280 -SWTK 8' Single Device
RF280 -SWTK/12-1418-1	RF280 -SWTK 12' One Device Per Door
RF280 -SWTK/6-1418-2	RF280 -SWTK 6' Dual Devices
RF280 -SWTK/8-1418-2	RF280 -SWTK 8' Dual Devices
RF280 -SWTK/12-1418-2	RF280 -SWTK 12' Two Devices Per Door
SF280 -SWTK/6-1418-1	SF280 -SWTK 6' Single Device
SF280 -SWTK/8-1418-1	SF280 -SWTK 8' Single Device
SF280 -SWTK/12-1418-1	SF280 -SWTK 12' One Device Per Door
SF280 -SWTK/6-1418-2	SF280 -SWTK 6' Dual Devices
SF280 -SWTK/8-1418-2	SF280 -SWTK 8' Dual Devices
SF280 -SWTK/12-1418-2	SF280 -SWTK 12' Two Devices Per Door
HBP200 /6-1418-1	HBP200 6' One Device Per Door
HBP200 /8-1418-1	HBP200 8' One Device Per Door
HBP200 /10-1418-1	HBP200 10' One Device Per Door
HBP200 /12-1418-1	HBP200 12' One Device Per Door
HBP200 /6-1418-2	HBP200 6' Two Devices Per Door
HBP200 /8-1418-2	HBP200 8' Two Devices Per Door
HBP200 /10-1418-2	HBP200 10' Two Devices Per Door
HBP200 /12-1418-2	HBP200 12' Two Devices Per Door

SOFT CLOSE FOR PEMKO FLAT TRACK SYSTEMS

For Pemko Designer Series Flat Track Sliding Door Hardware

Minimum Door Width Using Single Device 15".

22" Minimum Door Width When Using Dual Devices.

For doors weighing 88 - 132 lbs.

ITEM #	DESCRIPTION
DSG-FT-05 /6-1411-1	DSG-FT-05 6' Single Soft Close Device
DSG-FT-05 /8-1411-1	DSG-FT-05 8' Single Soft Close Device
DSG-FT-05 /6-1411-2	DSG-FT-05 6' Dual Soft Close Devices
DSG-FT-05 /8-1411-2	DSG-FT-05 8' Dual Soft Close Devices
DSG-FT-06 /6-1411-1	DSG-FT-06 6' Single Soft Close Device
DSG-FT-06 /8-1411-1	DSG-FT-06 8' Single Soft Close Device
DSG-FT-06 /6-1411-2	DSG-FT-06 6' Dual Soft Close Devices
DSG-FT-06 /8-1411-2	DSG-FT-06 8' Dual Soft Close Devices

For doors weighing 133-176 lbs.

ITEM #	DESCRIPTION
DSG-FT-05 /6-1413-1	DSG-FT-05 6' Single Soft Close Device
DSG-FT-05 /8-1413-1	DSG-FT-05 8' Single Soft Close Device
DSG-FT-05 /6-1413-2	DSG-FT-05 6' Dual Soft Close Devices
DSG-FT-05 /8-1413-2	DSG-FT-05 8' Dual Soft Close Devices
DSG-FT-06 /6-1413-1	DSG-FT-06 6' Single Soft Close Device
DSG-FT-06 /8-1413-1	DSG-FT-06 8' Single Soft Close Device
DSG-FT-06 /6-1413-2	DSG-FT-06 6' Dual Soft Close Devices
DSG-FT-06 /8-1413-2	DSG-FT-06 8' Dual Soft Close Devices

For doors weighing 177-240 lbs.

ITEM #	DESCRIPTION
DSG-FT-05 /6-1418-1	DSG-FT-05 6' Single Soft Close Device
DSG-FT-05 /8-1418-1	DSG-FT-05 8' Single Soft Close Device
DSG-FT-05 /6-1418-2	DSG-FT-05 6' Dual Soft Close Devices
DSG-FT-05 /8-1418-2	DSG-FT-05 8' Dual Soft Close Devices
DSG-FT-06 /6-1418-1	DSG-FT-06 6' Single Soft Close Device
DSG-FT-06 /8-1418-1	DSG-FT-06 8' Single Soft Close Device
DSG-FT-06 /6-1418-2	DSG-FT-06 6' Dual Soft Close Devices
DSG-FT-06 /8-1418-2	DSG-FT-06 8' Dual Soft Close Devices

PEMKO
ASSA ABLOY

Experience a safer
and more open world

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

SOFT CLOSE FOR PEMKO FLAT TRACK SYSTEMS

For Pemko Builders Series Flat Track Sliding Door Hardware

Minimum Door Width Using Single Device 15".

22" Minimum Door Width When Using Dual Devices.

For doors weighing 88 - 132 lbs.

ITEM #	DESCRIPTION
BLD-FT-01 /6-1411-1	BLD-FT-01 6' Single Device
BLD-FT-01 /8-1411-1	BLD-FT-01 8' Single Device
BLD-FT-01 /6-1411-2	BLD-FT-01 6' Dual Devices
BLD-FT-01 /8-1411-2	BLD-FT-01 8' Dual Devices
BLD-FT-02 /6-1411-1	BLD-FT-02 6' Single Device
BLD-FT-02 /8-1411-1	BLD-FT-02 8' Single Device
BLD-FT-02 /6-1411-2	BLD-FT-02 6' Dual Devices
BLD-FT-02 /8-1411-2	BLD-FT-02 8' Dual Devices

For doors weighing 133-176 lbs.

ITEM #	DESCRIPTION
BLD-FT-01 /6-1413-1	BLD-FT-01 6' Single Device
BLD-FT-01 /8-1413-1	BLD-FT-01 8' Single Device
BLD-FT-01 /6-1413-2	BLD-FT-01 6' Dual Devices
BLD-FT-01 /8-1413-2	BLD-FT-01 8' Dual Devices
BLD-FT-02 /6-1413-1	BLD-FT-02 6' Single Device
BLD-FT-02 /8-1413-1	BLD-FT-02 8' Single Device
BLD-FT-02 /6-1413-2	BLD-FT-02 6' Dual Devices
BLD-FT-02 /8-1413-2	BLD-FT-02 8' Dual Devices

For doors weighing 177-240 lbs.

ITEM #	DESCRIPTION
BLD-FT-01 /6-1418-1	BLD-FT-01 6' Single Device
BLD-FT-01 /8-1418-1	BLD-FT-01 8' Single Device
BLD-FT-01 /6-1418-2	BLD-FT-01 6' Dual Devices
BLD-FT-01 /8-1418-2	BLD-FT-01 8' Dual Devices
BLD-FT-02 /6-1418-1	BLD-FT-02 6' Single Device
BLD-FT-02 /8-1418-1	BLD-FT-02 8' Single Device
BLD-FT-02 /6-1418-2	BLD-FT-02 6' Dual Devices
BLD-FT-02 /8-1418-2	BLD-FT-02 8' Dual Devices

SOFT CLOSE RETROFIT KITS

For Designer Series Systems

ITEM #	DESCRIPTION
DSG1411-1	Single Device 88-132 lbs.
DSG1411-2	Dual Devices 88-132 lbs.
DSG1413-1	Single Device 133-176 lbs.
DSG1413-2	Dual Devices 133-176 lbs.
DSG1418-1	Single Device 177-240 lbs.
DSG1418-2	Dual Devices 177-240 lbs.

Finishes: add IS for Industrial Steel finish
add BSP for Black Suede finish
add SS for Stainless Steel finish

For Builders Series Systems

ITEM #	DESCRIPTION
BLD1411-1	Single Device 88-132 lbs.
BLD1411-2	Dual Devices 88-132 lbs.
BLD1413-1	Single Device 133-176 lbs.
BLD1413-2	Dual Devices 133-176 lbs.
BLD1418-1	Single Device 177-240 lbs.
BLD1418-2	Dual Devices 177-240 lbs.

Finishes: add C for IS finish
add D for BSP finish

For Box Track Systems

ITEM #	DESCRIPTION
SC1411-1	Single Device 88-132 lbs.
SC1411-2	Dual Devices 88-132 lbs.
SC1413-1	Single Device 133-176 lbs.
SC1413-2	Dual Devices 133-176 lbs.
SC1418-1	Single Device 177-240 lbs.
SC1418-2	Dual Devices 177-240 lbs.

SOFT CLOSE POCKET FRAME KIT

2x4 Wood or Metal Stud Constructed Walls	2x6 Wood Stud Constructed Walls	2x6 Metal Stud Constructed Walls	Net Door Size/s (The Kits can be trimmed in field)	Options
SC-PF28200A7284	SC-PF28200A7284-2X6	SC-PF28200A7284-SP6	2'6" x 6'8" - 3'0" x 7'0"	PFCD For Bi-Parting door openings
SC-PF28200A9696	SC-PF28200A9696-2X6	SC-PF28200A9696-SP6	4'0" x 7'0" - 4'0" x 8'0"	PFCD For Bi-Parting door openings

For Soft Close Kits

ITEM #	DESCRIPTION
PFKIT-SC	Replacement Hardware for Soft close Kits

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY

Experience a safer
and more open world