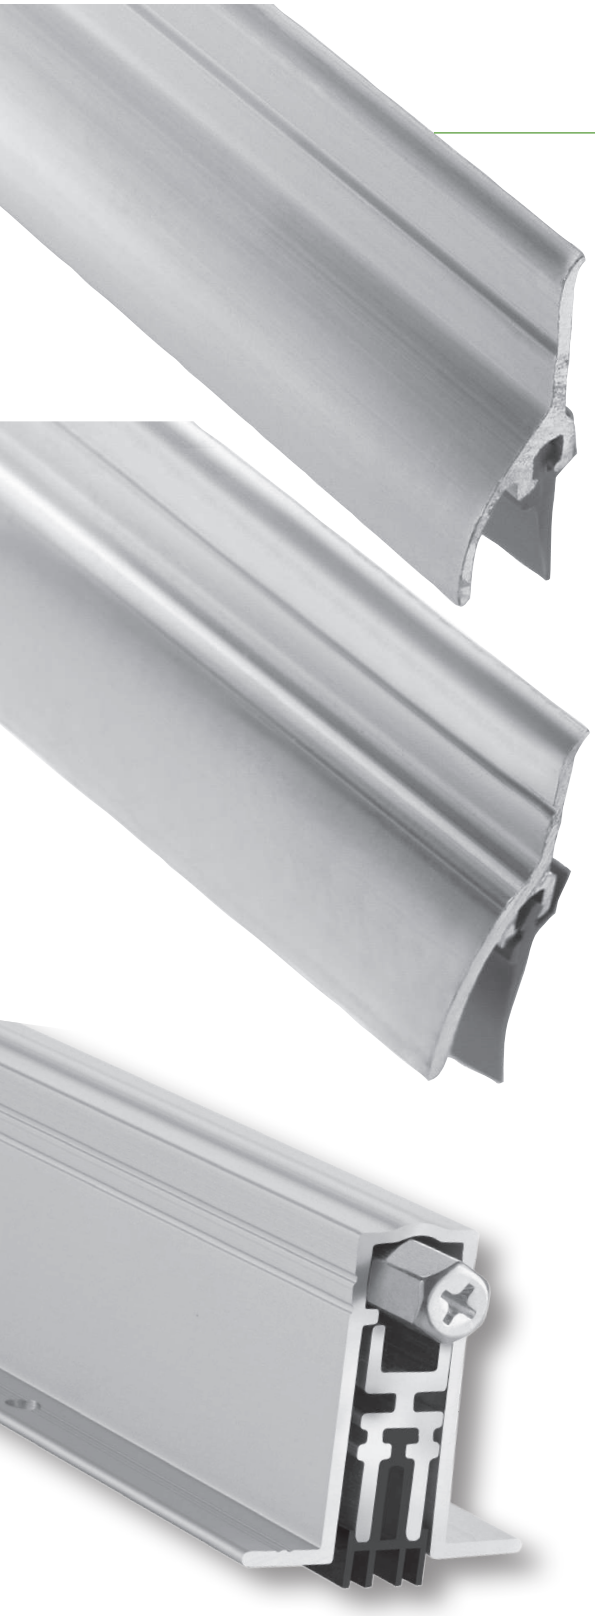

PEMKO DOOR BOTTOMS

CONTENTS:

Automatic Door Bottoms 136
Residential Automatic Door Bottoms 140
End Plates for Automatic Door Bottoms 141
Excessive Gap Door Bottom Solutions 142
Excessive Gap Door Top Solutions 142
Eco-V™ Door Shoes 142
Door Shoes 143
Thermally Broken Door Shoe 145
Door Sweeps for Hollow Metal Doors 146
Fabrication Options for Door Shoes 146
Door Bottom Sweeps 147
Stainless Steel Door Bottom Sweeps 151
Specialty Door Bottoms 152
Door Top Weatherstrip 152

INDEX:

PRODUCT	PAGE
56	148
57	148
68	152
209	143
210	143
211	143
215	143
216	143
216_FG	145
217	143
221	145
222	146
223	144
234	143
307	148
308	148
313	152
314	152
315	147
315SS	151
317	152
321	147
321SS	151
325XGSS	142
344	152
345	148
345	149
346	152
347	152
368	147
405	140
411	139
412	138
420	139
434	139
2113	144
2170	142
2173	144
2211	145
2212	145
2221	146
2343	144
3151	147
3151SS	151
3452	148
3452	149
3692	144
4131	138
4301	138
18061	149
18100	149
18100_NBE	150
18137	149
90062	149
90100	149
90100_NBE	150
293100_NB	149
293100_NBE	150
293100_V	150
EGA305xG	142
EV80	142
K411	141
K412	141
K420	141
K435	141
K435-PREM	141
K436	141
K4133	141
K4301	141
SA1	140
SA2	140
SA3	140
SA4	140
STC411	137
STC4131	137
XG2212	142

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY

Experience a safer
and more open world

AUTOMATIC DOOR BOTTOMS

- All Pemko Automatic Door Bottoms, 24" and up, can be manufactured for field alteration. Please specify when ordering: Allow 2" for field trimming
- Overall sizes range from 12" to 72". Sizes between 12" and 23.9" will be supplied at absolute NET length and will have no room for field trimming.
- 0.0625" Lead-lining available upon request; contact Pemko Customer Service for options on profiles
- Provided with end plate kits (except 420, SA, and 405V models) which include wood screws. Tek screws are available for mounting to hollow metal doors.
- See Planet Automatic Door Bottoms for additional models made by ASSA ABLOY Schweisse and offered in the U.S.A. by Pemko.

IMPORTANT DROP BAR INFORMATION

Drop seals of all types are designed to close a uniform size gap. Pemko drop seals can seal up to ¾" gaps (420 model can seal up to ½" gap), provided the gap is consistent. Gaps that start at less than ¾" and then grow cannot be closed. The drop seal utilizes a straight aluminum extrusion so it cannot close an inconsistent gap.Plunger extension to drop dimension is 1:1 (i.e., a ¼" extension on the plunger will equal a ¼" drop of the drop bar).

DROP-BAR SEAL ACTUATION

The drop bar mechanism prevents the seal from skidding along the floor/threshold while the door is being closed.

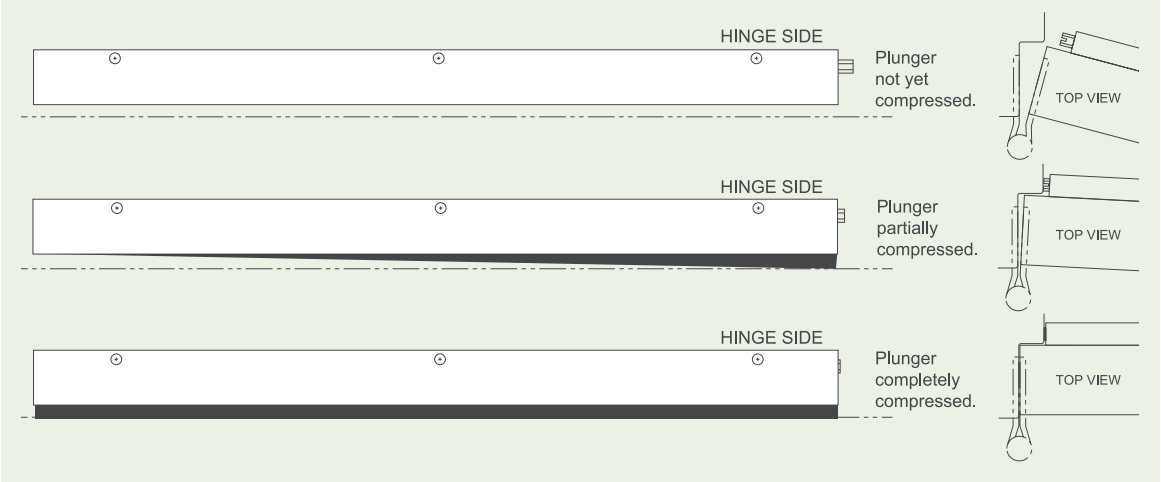

PEMKO
ASSA ABLOY
Experience a safer and more open world

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

AUTOMATIC DOOR BOTTOMS - ACOUSTIC

- Non-handed
- Recommended gap under door is 3/8" for optimal acoustic performance; max drop is 3/4"
- Internal mechanism allows bar to accommodate slight imperfections in floor materials
- STC411 end plate kit is K435; for doors narrower than 1-3/4", specify end plate kit K411
- STC4131 end plate kit is K4133C for Clear Anodized and K4133D for Dark Bronze Anodized

STC411_PK

AVAILABLE FINISHES: **A**
REPLACEMENT INSERT: **PK4111 (BL)**
ANSI: **R3G324, R3G325**

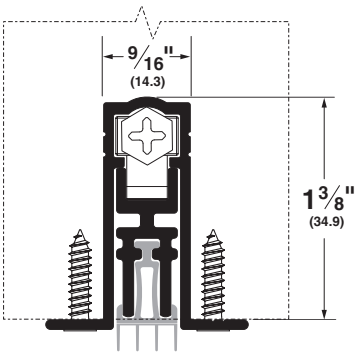

STC4131_PK

AVAILABLE FINISHES:
10BE, BSP, C, D, WSP
REPLACEMENT INSERT: **PK4111 (BL)**
ANSI: **R3G334, R3G335, R3G344, R3G345**



NOTE: STC411_PK Automatic Door Bottom is now included in PEMKOSTCSET-1 (A through E). Please see Acoustic Products section for more information.

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
10BE (Satin Bronze Powder Coated Aluminum) **A** (Mill Finish Aluminum) BSP (Black Suede Powder Coated Aluminum)
C (Clear Anodized) **D** (Dark Bronze Anodized) **WSP** (White Suede Powder Coated Aluminum)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY
Experience a safer and more open world

AUTOMATIC DOOR BOTTOMS - SURFACE AND SEMI-MORTISE MODELS

- Specify if the Automatic Door Bottom is for a semi-mortise application so that shorter screws can be provided
- Recommended gap under door is ½;" maximum drop is ¾"
- 4301 end plate kit is K436 for surface mounted applications
- 4131 end plate kit is K4133
- 412 end plate kit is K412R1

4301_NBL

AVAILABLE FINISHES: **BSP, C, D**
REPLACEMENT INSERT: **P516062 (BL, GR, W)**
ANSI: **R3A334, R3A335, R3A344, R3A345**

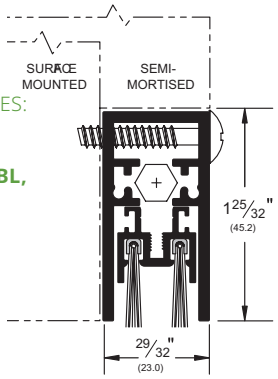

nylon brush (**NB**)

4301_PKL

AVAILABLE FINISHES: **BSP, C, D**
REPLACEMENT INSERT: **PK4304 (BL)**
ANSI: **R3G334, R3G335, R3G344, R3G345**

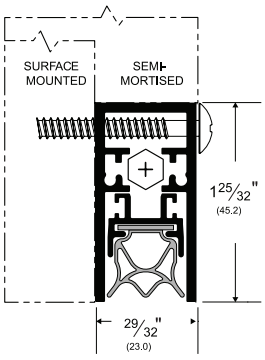

PemkoPrene™ (**PK**)

4131_NBL

AVAILABLE FINISHES: **BSP, C, D, SN**
REPLACEMENT INSERT: **P516041 (BL, GR)**
ANSI: **R3A334, R3A335, R3A344, R3A345**

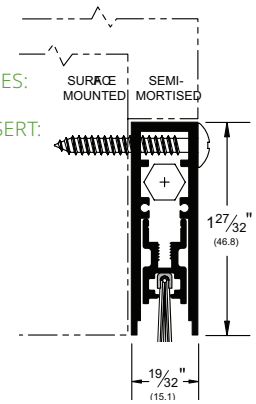

nylon brush (**NB**)

4131_RL

AVAILABLE FINISHES: **BSP, C, D, SN**
REPLACEMENT INSERT: **E7 (BL)**
ANSI: **R3G334, R3G335, R3G344, R3G345**

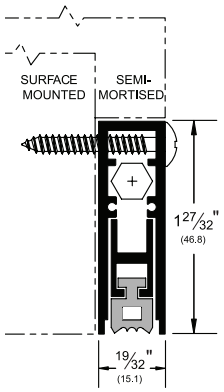

sponge EPDM (**R**)

412_NBL

AVAILABLE FINISHES: **B, BSP, C, D, S**
REPLACEMENT INSERT: **P516041 (BL, GR)**
ANSI: **R3A334, R3A335**

- Surface mounted application
- Handed and disassembly of the mechanism is required to reverse the hand

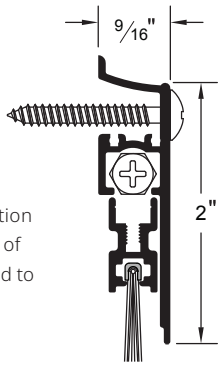

nylon brush (**NB**)

412_RL

AVAILABLE FINISHES: **B, BSP, C, D, S**
REPLACMENT INSERT: **E7 (BL)**
ANSI: **R3G334, R3G335**

- Surface mounted application
- Handed and disassembly of the mechanism is required to reverse the hand



sponge EPDM (**R**)

Alternate Insert For 4301

4301_RL

AVAILABLE FINISHES: **BSP, C, D**
REPLACEMENT INSERT: **E4303 (BL)**
ANSI: **R3G334, R3G335, R3G344, R3G345**



sponge EPDM (**R**)

Alternate Inserts For 4131

4131_PKL

AVAILABLE FINISHES: **BSP, C, D, SN**
REPLACEMENT INSERT: **PK4132 (BL)**
ANSI: **R3G334, R3G335, R3G344, R3G345**



PemkoPrene™ (**PK**)

4131_SL

AVAILABLE FINISHES: **BSP, C, D, SN**
REPLACEMENT INSERT: **SR6 (BL)**
ANSI: **R3E334, R3E335, R3E344, R3E345**



sponge silicone (**S**)

Alternate Inserts For 412

412_SL

AVAILABLE FINISHES: **B, BSP, C, D, S**
REPLACEMENT INSERT: **SR6 (BL)**
ANSI: **R3E334, R3E335**



sponge silicone (**S**)

412_PKL

AVAILABLE FINISHES: **B, BSP, C, D, S**
REPLACEMENT INSERT: **PK4132 (BL)**
ANSI: **R3G334, R3G335**



PemkoPrene™ (**PK**)

All above products

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
B (Cladded Brass Shell) **BSP** (Black Suede Powder Coated Aluminum) **C** (Clear Anodized)
D (Dark Bronze Anodized) **S** (Cladded Stainless Steel) **SN** (Satin Nickel Anodized)

PEMKO ASSA ABLOY
Experience a safer and more open world
Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

AUTOMATIC DOOR BOTTOMS - FULL-MORTISE MODELS

- Recommended drop is ½"; maximum drop is ¾", except where noted
- 411 and 434 end plate kit is K435. When using 411 model on doors narrower than 1 ¾", specify end plate kit K411
- 420 is used on hollow metal doors and does not come with end plates; requires a hole for the plunger to extend through in the hinge side door edge.

434_NBL

AVAILABLE FINISH: A
REPLACEMENT INSERT: **P516062 (BL, GR, W)**
ANSI: **R3A324, R3A325**



nylon brush (**NB**)

434_RL

AVAILABLE FINISH: **A**
REPLACEMENT INSERT: **E4303 (BL)**
ANSI: **R3G324, R3G325**



sponge EPDM (**R**)

411_NBL

AVAILABLE FINISH: **A**
REPLACEMENT INSERT: **P516041 (BL, GR)**
ANSI: **R3A324, R3A325**



nylon brush (**NB**)

411_RL

AVAILABLE FINISH: **A**
REPLACEMENT INSERT: **E7 (BL)**
ANSI: **R3G324, R3G325**



sponge EPDM (**R**)

420_PKL

AVAILABLE FINISH: **A**
REPLACEMENT INSERT: **PK4 (BL, GR)**
ANSI: **R3G324, R3G325**

- For hollow metal doors maximum drop is 1/2"
- Recommended drop is 3/8"



PemkoPrene™ (**PK**)

Alternate Inserts For 434

434_PKL

AVAILABLE FINISH: **A**
REPLACEMENT INSERT: **PK4304 (BL)**
ANSI: **R3G324, R3G325**



PemkoPrene™ (**PK**)

Alternate Inserts For 411

411_PKL

AVAILABLE FINISH: **A**
REPLACEMENT INSERT: **PK4132 (BL)**
ANSI: **R3G324, R3G325**



PemkoPrene™ (**PK**)

411_SL

AVAILABLE FINISHES: **A**
REPLACEMENT INSERT: **SR6 (BL)**
ANSI: **R3E324, R3E325**



sponge silicone (**S**)

Alternate Inserts For 420

420_VL

AVAILABLE FINISH: **A**
REPLACEMENT INSERT: **EV41 (BL, GR, W)**



Eco-V™ (**V**)

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
A (Mill Finish Aluminum)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY
Experience a safer and more open world

RESIDENTIAL AUTOMATIC DOOR BOTTOMS

SA1, SA2, SA3, SA4

AVAILABLE FINISHES: **A** (no finish selection), **D**
AVAILABLE LENGTHS: ***28", 32", 36", 42"***
REPLACEMENT INSERT: **EV5 (BL)**

- Surface type for wood doors
- 1/2"maximum drop
- Can be trimmed down by as much as 2"
- Non-handed
- End plates are not provided

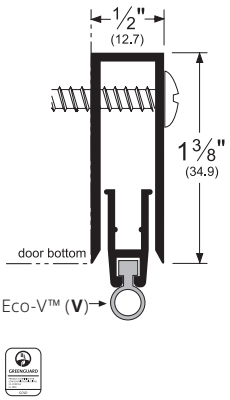

405_V

AVAILABLE FINISHES: **C**
REPLACEMENT INSERT: **EV43 (BL, GR)**

- Spring loaded door bottom sweep
- Available in 36" length only
- May be cut down to 24" minimum length



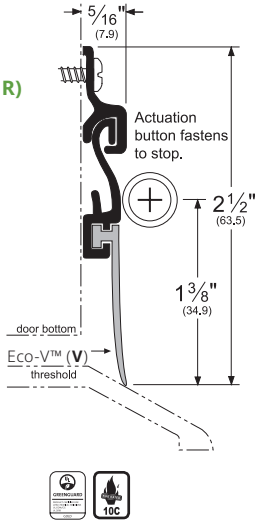

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
A (Mill Finish Aluminum) **C** (Clear Anodized)
D (Dark Bronze Anodized) **PW** (Painted White)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

END PLATES FOR AUTOMATIC DOOR BOTTOMS

- Metal end plates are provided to protect the mechanism and to give a clean, aesthetic appearance. Do not tighten with power tool
- Plunger end plate prevents the plunger adjustment from rotating
- Necessary fasteners are provided with End Plate kits; color corresponds with case color
- All end plates are black in color

411 and STC411® End Plates Mortise

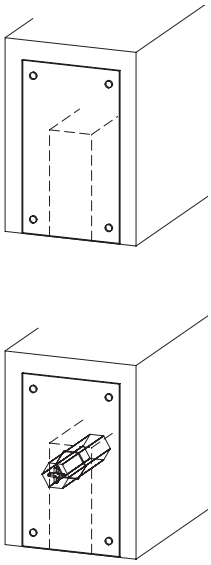

434 End Plates Mortise

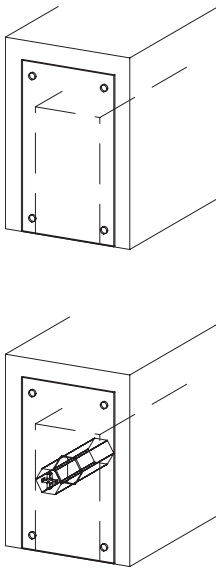

4131 and STC4131® Auto Door Bottom Semi-Mortise*

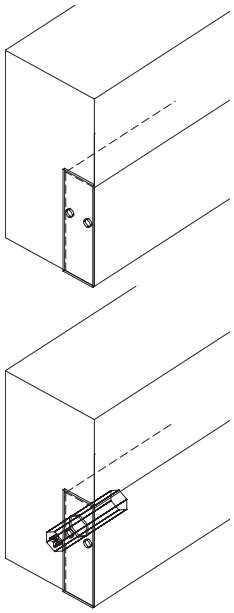

4301 Auto Door Bottom Semi-Mortise*

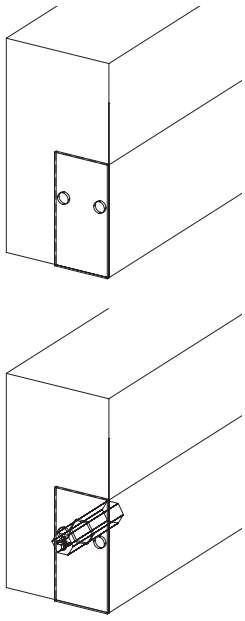

412 New Style End Plates

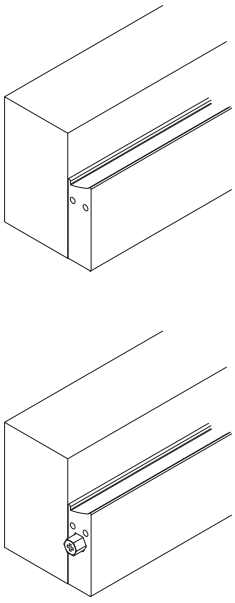

Automatic Door Bottom Kits	
K411	Optional Kit for 411 and STC411 Door Bottom, 1 3/8" Doors
K412R1C	Kit for new style 412 Door Bottom - Clear
K412R1D	Kit for new style 412 Door Bottom - Dark Bronze
K4133C	Kit for 4131, STC4131 Door Bottoms, Clear
K4133D	Kit for 4131, STC4131 Door Bottoms, Dark Bronze
K4133G	Kit for 4131 Door Bottom, Bright Dip Gold
K420	Kit for 420 Door Bottom
K435	Standard Kit for 411, 434, and STC411 Door Bottom
K436	Kit for 4301 Door Bottom (surface)
K435-PREM	Special End-Support Mounting Kit for 434 (sold separately)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

EXCESSIVE GAP DOOR BOTTOM SOLUTIONS

- Brings fire-rated doors with excessive bottom gaps back into spec - up to 1-1/2"
- Meets UL10C requirements for 90 minute single and pairs of doors
- Supplied net length (as ordered)
- Patent Pending
- Two rows of fasteners must be installed for double door applications (XG2212_PK773 only)

XG2212_PK773

AVAILABLE FINISHES: **A, BSP, WSP, 10BE**
REPLACEMENT INSERT: **PK773 (BL)**

- Aluminum construction
- Easily field modifiable with standard equipment
- Supplied with K450XG end plate kit
- Patent Pending



325XGSSN

AVAILABLE FINISHES: **SS, SSBSP, SSWSP, SS10BE**
REPLACEMENT INSERT: **N25 (BL)**

- Stainless steel door sweep paired with stainless steel angle
- #4 brushed stainless steel
- Supplied with K450XG end plate kit



EXCESSIVE GAP DOOR TOP SOLUTIONS

- Brings fire-rated doors with excessive top gaps back into spec - up to 1/2"
- Meets UL10C requirements for 90 minute single or pairs of fire rated doors
- Supplied net length (as ordered)

EGA305XG

AVAILABLE FINISHES: **SS, SSBSP, SSWSP, SS10BE**

- Stainless steel construction, #4 brushed
- Supplied with HSS2000 intumescent
- Supplied with K450XG end plate kit

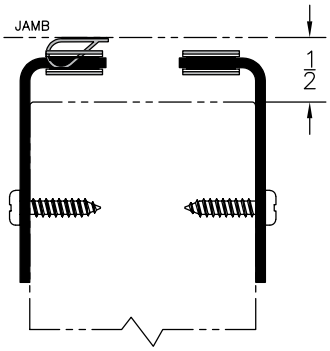

K450XG END PLATE KIT

SUPPLIED WITH EGA305XG, XG2212_PK773, AND 325XGSSN



ECO-V™ DOOR SHOES

- Dual durometer Eco-V™ door shoe
- EV80_ is furnished net 36"
- Supplied Net Length (as ordered)

EV80

AVAILABLE FINISHES: **D**
AVAILABLE LENGTHS: **36" NET**



2170_V

AVAILABLE COLORS: **D**
AVAILABLE LENGTHS: **36", 48"**

Also available with unnotched insert:
2170_V36UN
2170_V48UN

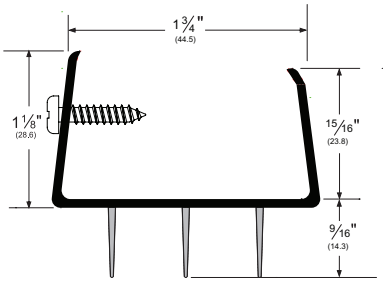

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
10BE (Satin Bronze Powder) **A** (Mill Finish Aluminum) **BSP** (Black Suede Powder)
SS (Stainless Steel) **WSP** (White Suede Powder)
Eco-V® DOORS SHOES: **D** (Dark Brown)

PEMKO
ASSA ABLOY
Experience a safer and more open world

800-824-3018 | www.pemko.com
Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

DOOR SHOES

- Profiles on this page available with PemkoPrene™ (PK) or Eco-V™ (V); both are the same shape and size
- Slotted holes for easy adjustment
- Rain drip model is ideal for deflecting rain away from the bottom of door
- Recommended compression of gasket fins is 1/16"
- Except where specified otherwise, supplied with 1/4" undercut from length ordered. Specify "NET LENGTH" to receive length as ordered.

216_V

AVAILABLE FINISHES: **A, B, BSP, D, SN, WSP**
REPLACEMENT INSERT: **EV9 (BL, GR)**
ANSI: **R3D514**

216_PK

AVAILABLE FINISHES: **A, B, BSP, D, SN, WSP**
REPLACEMENT INSERT: **PK9 (BL, GR)**
ANSI: **R3G514**

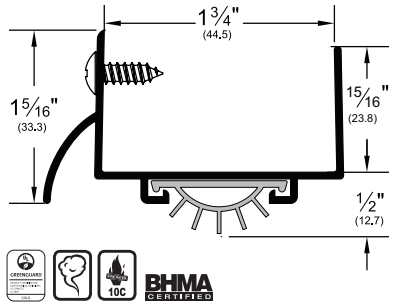

B finish flange is 5/8

215_V

AVAILABLE FINISHES:**A, BSP, D, PW, SN**
REPLACEMENT INSERT: **EV9 (BL, GR)**
ANSI: **R3D514**

215_PK

AVAILABLE FINISHES:**A, BSP, D, PW, SN**
REPLACEMENT INSERT: **PK9 (BL, GR)**
ANSI: **R3G514**



210_V

AVAILABLE FINISHES: **A, BSP, D, PW, SN**
REPLACEMENT INSERT: **EV9 (BL, GR)**
ANSI: **R3D514**

210_PK

AVAILABLE FINISHES: **A, BSP, D, PW, SN**
REPLACEMENT INSERT: **PK9 (BL, GR)**
ANSI: **R3G514**



217_V

AVAILABLE FINISHES: **A, BSP, D, G, SN, WSP**
REPLACEMENT INSERT: **EV9 (BL, GR)**
ANSI: **R3D414**

217_PK

AVAILABLE FINISHES: **A, BSP, D, G, SN, WSP**
REPLACEMENT INSERT: **PK9 (BL, GR)**
ANSI: **R3G414**



211_V

AVAILABLE FINISHES: **4E, A, BSP, D, G, WSP**
REPLACEMENT INSERT: **EV9 (BL, GR)**
ANSI: **R3D414**

211_PK

AVAILABLE FINISHES: **4E, A, BSP, D, G, WSP**
REPLACEMENT INSERT: **PK9 (BL, GR)**
ANSI: **R3G414**



234_V

AVAILABLE FINISHES: **A, BSP, D, G**
REPLACEMENT INSERT: **EV9 (BL, GR)**
ANSI: **R3D414**

234_PK

AVAILABLE FINISHES: **A, BSP, D, G**
REPLACEMENT INSERT: **PK9 (BL, GR)**
ANSI: **R3G414**

- Supplied Net Length (as ordered)



209_V

AVAILABLE FINISHES: **A, BSP, D**
REPLACEMENT INSERT: **EV15 (BL, GR)**
ANSI: **R3D414**

- Supplied Net Length (as ordered)



NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
4E (Translucent Brass Powder Coat) **A** (Mill Finish Aluminum) **BSP** (Black Suede Powder Coated Aluminum)
D (Dark Bronze Anodized) **G** (Gold Anodized) **PW** (Painted White) **SN** (Satin Nickel Anodized)
WSP (White Suede Powder Coated Aluminum)

800-824-3018 | www.pemko.com

Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY
Experience a safer and more open world

DOOR SHOES *(Cont.)*

- Notched-fin gaskets (where applicable) allow up to 50% free air flow
- Recommended compression of gasket fins is 1/16
- Except where noted, supplied with 1/4" undercut from length ordered. Specify "NET LENGTH" to receive length as ordered."

2173_V

AVAILABLE FINISHES: **A, BSP, D, G, WSP**
AVAILABLE LENGTHS: **36", 48"**
REPLACEMENT INSERT: **EV94 (BL)**
ANSI: **R3D414, R3D415**



Also available with unnotched insert:
2173_V36UN
2173_V48UN

2343_V

AVAILABLE FINISHES: **A, BSP, D, G**
AVAILABLE LENGTHS: **36", 48"**
REPLACEMENT INSERT: **EV94 (BL)**
ANSI: **R3D414, R3D415**

- Supplied Net Length (as ordered)



Also available with unnotched insert:
2343_V36UN
2343_V48UN

3692_PK773

AVAILABLE FINISHES: **A**
AVAILABLE LENGTHS: **36", 48"**
REPLACEMENT INSERT: **PK773 (BL, GR)**
ANSI: **R3G414, R3G415**

- Supplied Net Length (as ordered)



2113_V

AVAILABLE FINISHES: **4E, A, BSP, D, G, WSP**
AVAILABLE LENGTHS: **36", 48"**
REPLACEMENT INSERT: **EV94 (BL)**
ANSI: **R3D414, R3D415**



Also available with unnotched insert:
2113_V36UN
2113_V48UN

Replacement "V" gasket for Door Shoes on this page is EV94. For replacement gasket with nothed fins, add "N" to the end of the part number.

Example:
EV94BL-36.5 - Unnotched fins
EV94BL-36.5N - Notched fins (for airflow)

223_NB

AVAILABLE FINISHES: **A, BSP, WSP**
REPLACEMENT INSERT: **P516041 (BL, GR)**
ANSI: **R3A514, R3A515**

- Supplied Net Length (as ordered)

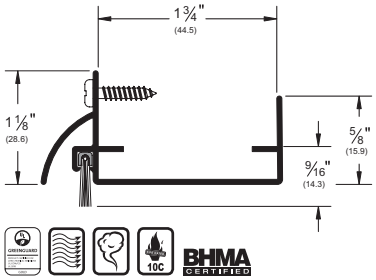

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
4E (Translucent Brass Powder Coat) **A** (Mill Finish Aluminum) **BSP** (Black Suede Powder Coated Aluminum)
D (Dark Bronze Anodized) **G** (Gold Anodized) **WSP** (White Suede Powder Coated Aluminum)

PEMKO
ASSA ABLOY
Experience a safer and more open world

800-824-3018 | www.pemko.com
Check the web site for the up-to-date catalog

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

DOOR SHOES *(Cont.)*

2212_PK773

AVAILABLE FINISHES: **10BE, 4E, A, BSP, WSP**
REPLACEMENT INSERT: **PK773 (BL)**
ANSI: **R3G416**

- Combination door shoe and kick plate
- Excellent Acoustic performance
- Supplied Net Length (as ordered)

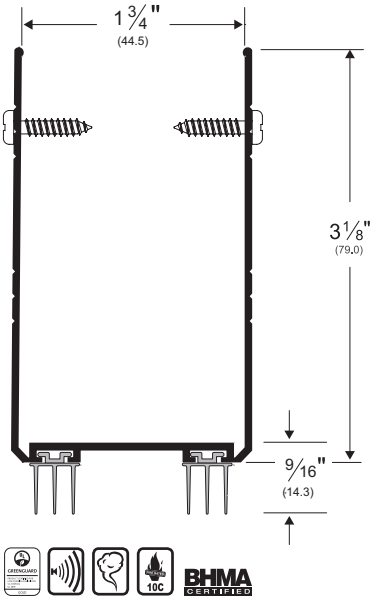

221_V

AVAILABLE FINISHES: **4E, A, BSP, D, G, WSP**
REPLACEMENT INSERT: **EV9 (BL, GR)**
ANSI: **R3D414**

221_PK

AVAILABLE FINISHES: **4E, A, BSP, D, G, WSP**
REPLACEMENT INSERT: **PK9 (BL, GR)**
ANSI: **R3G414**

- Combination door shoe and kick plate
- Supplied Net Length (as ordered)

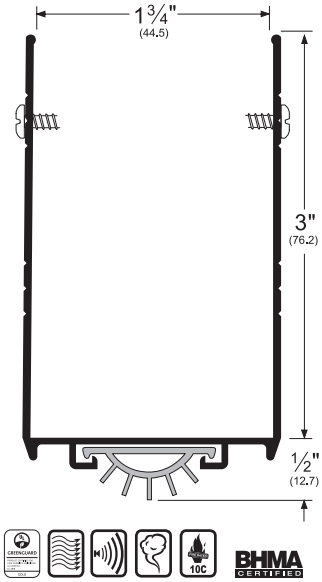

2211_V

AVAILABLE FINISHES: **A, BSP, D, G, WSP**
REPLACEMENT INSERT: **EV9 (BL, GR)**
ANSI: **R3D514**

2211_PK

AVAILABLE FINISHES: **A, BSP, D, G, WSP**
REPLACEMENT INSERT: **PK9 (BL, GR)**
ANSI: **R3G514**

- Combination door shoe and kick plate with raindrip
- Supplied Net Length (as ordered)

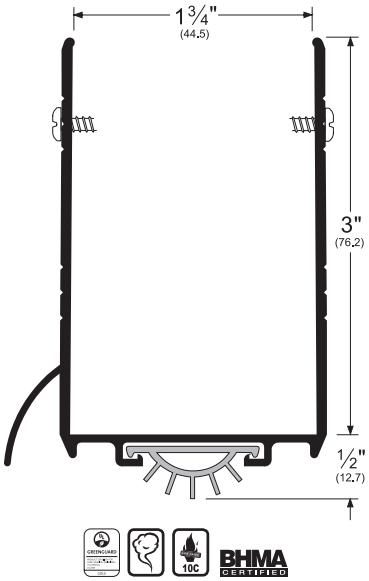

Thermally Broken Door Shoe

- Polypropylene thermal break (FG) prevents conductivity of hot or cold from exterior to interior. Supplied with PemkoPrene™ Seal
- Supplied Net Length (as ordered)

216_FG

AVAILABLE FINISHES: **A, BSP, D, SN, WSP**
REPLACEMENT INSERT: **PK216 (BL, GR)**
ANSI: **R3D514**

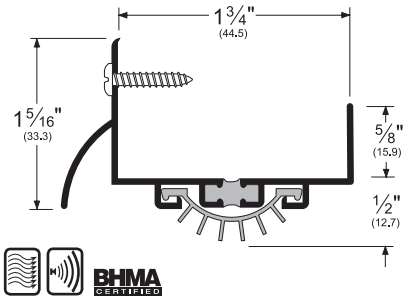

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
10BE (Satin Bronze Powder Coated Aluminum) **4E** (Translucent Brass Powder Coat) **A** (Mill Finish Aluminum)
BSP (Black Suede Powder Coated Aluminum) **D** (Dark Bronze Anodized) **G** (Gold Anodized) **SN** (Satin Nickel Anodized)
WSP (White Suede Powder Coated Aluminum)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY
Experience a safer and more open world

DOOR SWEEPS FOR HOLLOW METAL DOORS

- Profiles in this section available with PemkoPrene™ (PK) or Eco-V™ (V); both are the same shape and size
- Slotted holes for easy adjustment
- Rain drip model is ideal for deflecting rain away from the bottom of the door

222_V

AVAILABLE FINISHES: **4E, A, BSP, D, WSP**
REPLACEMENT INSERT: **EV9 (BL, GR)**
ANSI: **R3D414**

222_PK

AVAILABLE FINISHES: **4E, A, BSP, D, WSP**
REPLACEMENT INSERT: **PK9 (BL, GR)**
ANSI: **R3G414**

- For hollow metal doors with inverted bottom channel
- Supplied Net Length (as ordered)

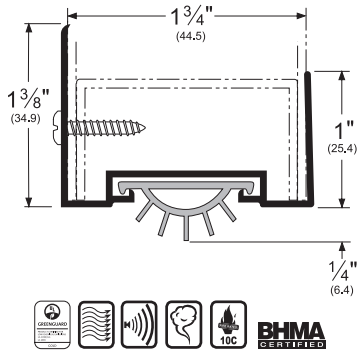

2221_V

AVAILABLE FINISHES: **A, BSP, G, WSP**
REPLACEMENT INSERT: **EV9 (BL, GR)**
ANSI: **R3D514**

2221_PK

AVAILABLE FINISHES: **A, BSP, G, WSP**
REPLACEMENT INSERT: **EV9 (BL, GR)**
ANSI: **R3G514**

- Supplied Net Length (as ordered)

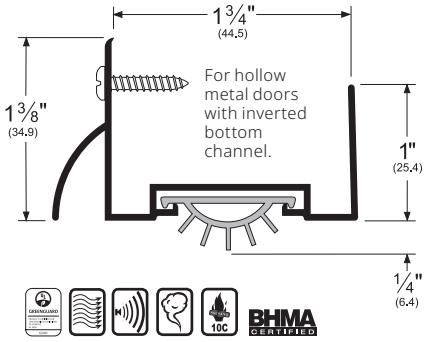

FABRICATION OPTIONS FOR DOOR SHOES

½" Full Notch

- **Fabrication includes:** removal of rain drip and front flange of door shoe to prevent interference with door stop and weatherstrip
- **Ordering:** order width of door leaf, and designate by adding **"M"** following the product number

(Example: a **216AV** with a ½" full notch fabrication, for a 36" door leaf = **216AVM36**)



½" Half Notch

- **Fabrication includes:** removal of rain drip to prevent interference with door stop and weatherstrip
- **Ordering:** order width of door leaf and designate by adding **"N"** following the product number
- **Special:** Other half notches available are 9/16", 5/8", and 3/4" widths, please specify when ordering

(Example: a **216AV** with a ½" half notch fabrication, for a 36" door leaf = **216AVN36**)



NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
4E (Translucent Brass Powder Coat) **A** (Mill Finish Aluminum) **BDC** (Bright Dip Clear Anodized)
BSP (Black Suede Powder Coat) **D** (Dark Bronze Anodized) **G** (Gold Anodized) **WSP** (White Suede Powder Coat)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

DOOR BOTTOM SWEEPS

315_N

AVAILABLE FINISHES:
B, BSP, C, D, WSP, 10BE, G, SN
REPLACEMENT INSERT: **E315 (BL)**
ANSI: **R3B434, R3B435**



3151_N

AVAILABLE FINISHES: **BSP, C, D, G, WSP**
REPLACEMENT INSERT: **E321 (BL)**
ANSI: **R3B434**



321_N

AVAILABLE FINISHES: **BSP, C, D, G, WSP**
REPLACEMENT INSERT: **E321 (BL)**
ANSI: **R3B434, R3B435**



368_N

AVAILABLE FINISHES: **BSP, C, WSP**
REPLACEMENT INSERT: **E368 (BL)**
ANSI: **R3B434, R3B435**



NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
B (Mill Finish Extruded Bronze [Brass]) **BSP** (Black Suede Powder Coated Aluminum)
C (Clear Anodized) **D** (Dark Bronze Anodized) **G** (Gold Anodized) **WSP** (White Suede Powder Coated Aluminum)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY
Experience a safer and more open world

DOOR BOTTOM SWEEPS *(Cont.)*

307_V
AVAILABLE FINISHES:
10BE, 4E, A, BSP, C, D, WSP
REPLACEMENT INSERT:
EV54 (BL, GR, W)
ANSI: **R3D434**

308_V
AVAILABLE FINISHES:
4E, A, BSP, C, D, PW
REPLACEMENT INSERT:
EV65 (BL, GR)
ANSI: **R3D434**

345_V
AVAILABLE FINISHES:
A, BSP, C, D, G, WSP
REPLACEMENT INSERT:
EV54 (BL, GR, W)
ANSI: **R3D534**

3452_V
AVAILABLE FINISHES:
A, BSP, C, D, WSP, G, SN
REPLACEMENT INSERT:
EV65 (BL, GR, W)
ANSI: **R3D534**

307_PK
AVAILABLE FINISHES:
10BE, 4E, A, BSP, C, D, WSP
REPLACEMENT INSERT:
PK54 (BL, GR)
ANSI: **R3G434**

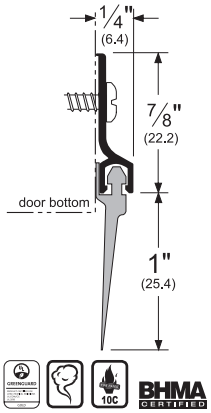

308_PK
AVAILABLE FINISHES:
4E, A, BSP, C, D, PW
REPLACEMENT INSERT:
PK65 (BL, GR)
ANSI: **R3D434**

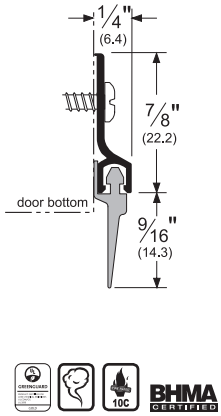

345_PK
AVAILABLE FINISHES:
A, BSP, C, D, G, WSP
REPLACEMENT INSERT:
PK54 (BL, GR)
ANSI: **R3G534**

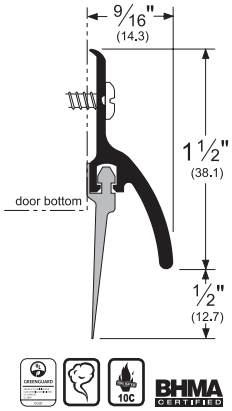

3452_PK
AVAILABLE FINISHES:
A, BSP, C, D, WSP, G, SN
REPLACEMENT INSERT:
PK65 (BL, GR)
ANSI: **R3G534**

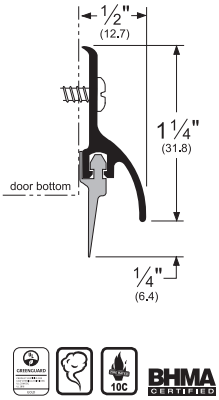

56_V
AVAILABLE FINISHES:
A, BSP, D, WSP
REPLACEMENT INSERT:
EV56 (BL, GR)

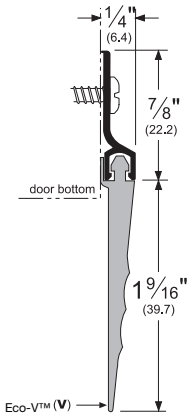

57_V
AVAILABLE FINISHES:
A, BSP, D, WSP
REPLACEMENT INSERT:
EV57 (BL)

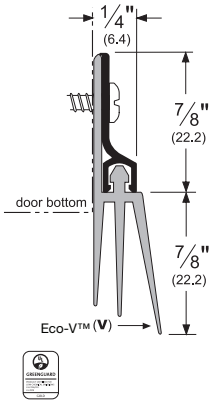

345_
AVAILABLE FINISHES:
A, B, BSP, C, D, G, WSP
ANSI: **R3Y936**



NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
10BE (Satin Bronze Powder Coated Aluminum) **4E** (Translucent Brass Powder Coat) **A** (Mill Finish Aluminum)
B (Mill Finish Extruded Bronze [Brass]) **BSP** (Black Suede Powder Coat) **C** (Clear Anodized)
D (Dark Bronze Anodized) **G** (Gold Anodized) **PW** (Painted White) **WSP** (White Suede Powder Coat)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

DOOR BOTTOM SWEEPS *(Cont.)*

345_NB

AVAILABLE FINISHES:
A, BSP, D, G, WSP
REPLACEMENT INSERT:
P14100 (BL, GR)
ANSI: **R3A534**



3452_NB

AVAILABLE FINISHES:
BSP, C, D, G, WSP
REPLACEMENT INSERT:
P14075 (BL, GR)
ANSI: **R3A534**



18061_NB

AVAILABLE FINISHES:
BSP, C, D, G, SN, WSP
REPLACEMENT INSERT:
P516062 (BL, GR, W)
ANSI: **R3A434**



18137_NB

AVAILABLE FINISHES:
BSP, C, D, G, WSP
REPLACEMENT INSERT:
P38137 (BL, GR)
ANSI: **R3A434**

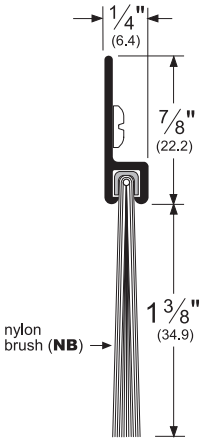

18100_NB

AVAILABLE FINISHES:
BSP, C, D, G, WSP
REPLACEMENT INSERT:
P38100 (BL, GR)
ANSI: **R3A434**

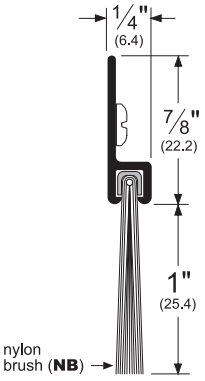

293100_NB

AVAILABLE FINISHES:
BSP, C, D, G, WSP
REPLACEMENT INSERT:
P516100 (BL, GR, W)

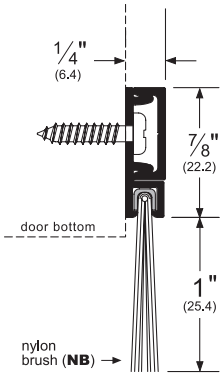

90062_NB

AVAILABLE FINISHES:
BSP, C, D, G, WSP
REPLACEMENT INSERT:
P516062 (BL, GR, W)
ANSI: **R3A414**



90100_NB

AVAILABLE FINISHES:
BSP, C, D, WSP
REPLACEMENT INSERT:
P516100 (BL, GR, W)
ANSI: **R3A414**

For hollow metal doors with inverted channel



NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
A (Mill Finish Aluminum) **BSP** (Black Suede Powder Coat) **C** (Clear Anodized)
D (Dark Bronze Anodized) **G** (Gold Anodized) **SN** (Satin Nickel Anodized)
WSP (White Suede Powder Coat)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY
Experience a safer and more open world

DOOR BOTTOM SWEEPS *(Cont.)*

Alternate Insert For 18100

18100_NBE

AVAILABLE FINISHES: **BSP, C, D, G, WSP**
REPLACEMENT INSERT: **P38100E (BL)**
ANSI: **R3A434**

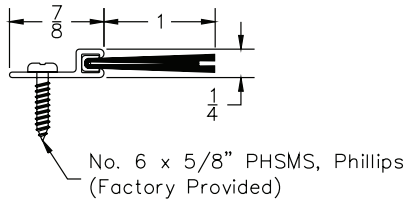

Alternate Insert For 90100

90100_NBE

AVAILABLE FINISHES: **BSP, C, D, WSP**
REPLACEMENT INSERT: **P516100E (BL)**
ANSI: **R3A414**

- For hollow metal doors with inverted channel

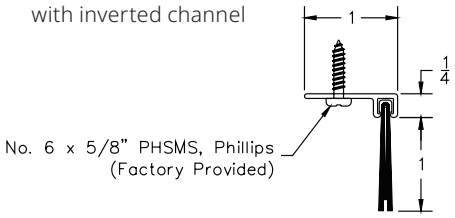

Alternate Inserts For 293100

293100_V

AVAILABLE FINISHES: **BSP, C, D, G, WSP**
REPLACEMENT INSERT: **EV54 (BL, GR, W)**



293100_NBE

AVAILABLE FINISHES: **BSP, C, D, G, WSP**
REPLACEMENT INSERT: **P516100E (BL)**

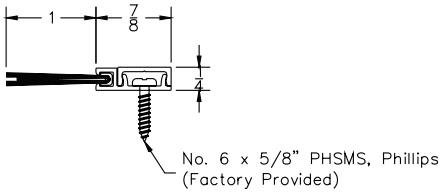

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
BSP (Black Suede Powder Coat), **C** (Clear Anodized), **D** (Dark Bronze Anodized), **G** (Gold Anodized), **WSP** (White Suede Powder Coat),

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

STAINLESS STEEL DOOR BOTTOM SWEEPS

315SSN

AVAILABLE FINISH: **SS (#4 Finish)**
REPLACEMENT INSERT: **N8 (BL)**
ANSI: **R5B434, R5B435**

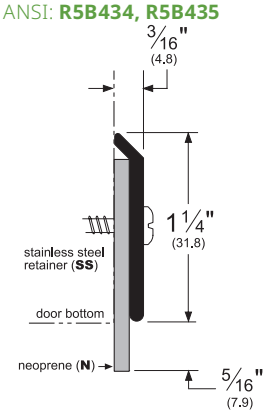

315SSR

AVAILABLE FINISH: **SS (#4 Finish)**
REPLACEMENT INSERT: **ER2 (BL)**
ANSI: **R5G164, R5G165**

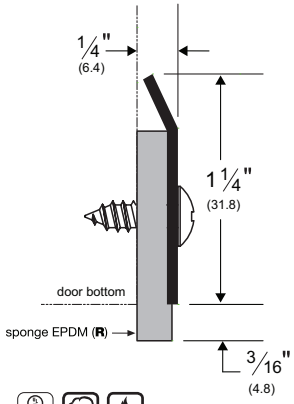

321SSN

AVAILABLE FINISH: **SS**
REPLACEMENT INSERT: **N8 (BL)**
ANSI: **R5B165**

- 430 Bright Annealed SS



3151SSN

AVAILABLE FINISH: **SS (#4 Finish)**
REPLACEMENT INSERT: **N9 (BL)**
ANSI: **R5B434, R5B435**

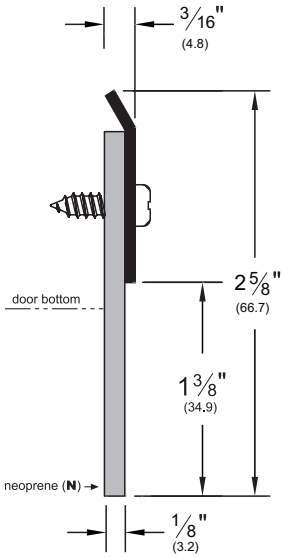

SPECIALTY DOOR SWEEP

- Talc-filled polypropylene body with flexible PemkoPrene® fin

SFSC200

AVAILABLE FINISH: **BL, GR**

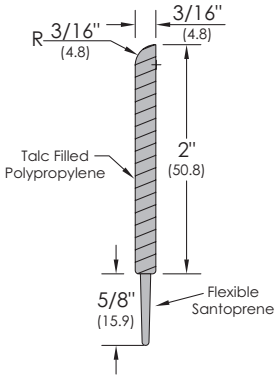

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
SS (See Individual Part)
SFSC Finishes: **BL** (Black), **GR** (Gray)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

PEMKO
ASSA ABLOY
Experience a safer and more open world

SPECIALTY DOOR BOTTOMS

- May be used in many different applications. Some of these shapes may be used as meeting stile gasketing; see page 174 for examples
- Supplied Net Length (as ordered)

313_N

AVAILABLE FINISHES: **A, D, G**
REPLACEMENT INSERT: **E1 (BL, GR)**
ANSI: **R3G416**



EPDM (**N**)

317_N

AVAILABLE FINISHES: **4E, A, BSP, D**
REPLACEMENT INSERT: **E1 (BL, GR)**
ANSI: **R3G416**

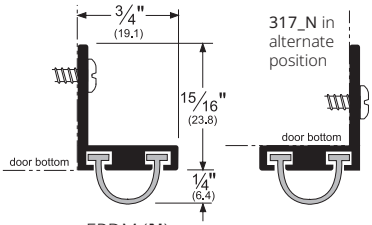

EPDM (**N**)

314_N

AVAILABLE FINISHES: **C, D, G**
REPLACEMENT INSERT: **E3 (BL)**
ANSI: **R3G416**



EPDM (**N**)

DOOR TOP WEATHERSTRIP

_344

AVAILABLE FINISHES: **PA**
AVAILABLE LENGTHS: **36", 48"**

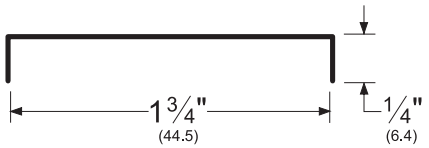

346_

AVAILABLE FINISHES: **10BE, BSP, C, D, WSP**

- Overhead rain drip with slotted holes
- Should be ordered a minimum of 4" longer than the door width

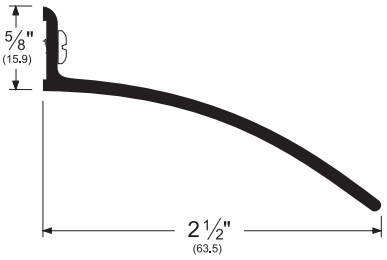

347_ 68_R

AVAILABLE FINISHES: **A, D, G**



NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE
10BE (Satin Bronze Powder Coated Aluminum) **4E** (Translucent Brass Powder Coat) **A** (Mill Finish Aluminum)
BSP (Black Suede Powder Coated Aluminum) **C** (Clear Anodized) **D** (Dark Bronze Anodized) **G** (Gold Anodized)
PA (Painted Aluminum) **WSP** (White Suede Powder Coated Aluminum)
Non-Metal Finish: **BL** (Black)

Copyright © 2015-2025, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.